IEC Plug E, Cord Connector (Rewireable), Angled

new



E

70° C

Description

Screwing cable terminal, Pin temperature 70 °C, Protection class I, Cable

- Note: Please order pvc strain relief seperately, mating strain reliefs please find under accessories.

Approvals

- CSA License Number: 1612079

References

General Product Information

Weblinks

Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Store, Distributor-Stock-Check, Accessories


Technical Data

Ratings IEC	10 A / 250 VAC; 50 Hz
Ratings UL/CSA	15 A / 250 VAC; 60 Hz
Dielectric Strength	> 3 kVAC between L-N > 1.5 kVAC between L/N-PE (1 min/50 Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class 1 acc. to IEC 61140
Terminal	Screw Clamp
Material: Housing	UL 94V-0

Plug	E acc. to IEC/EN 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10 A, Protection Class 1

Dimensions

40.7 mm

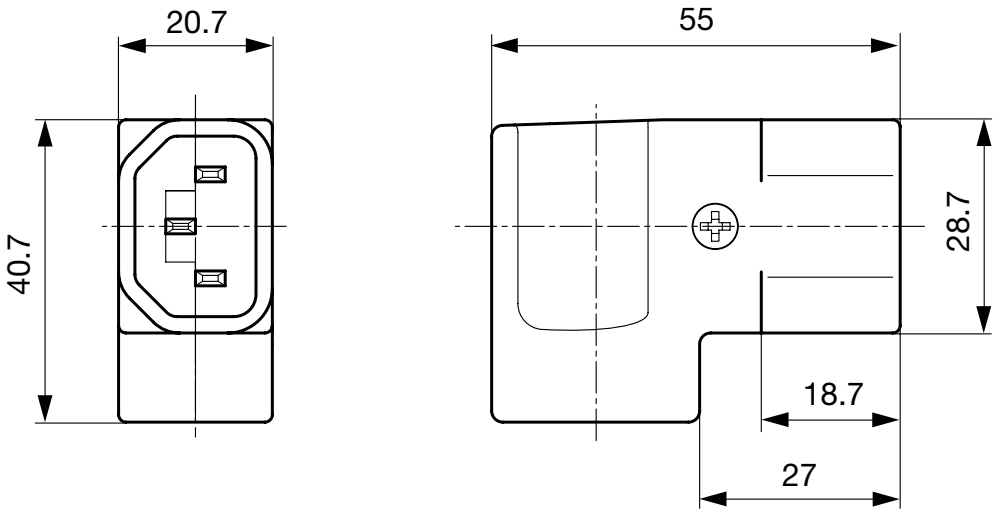

Config. Code

Product Configurator

9013 - H - A B C 0- D - E J

The characters are placeholders for the correspondingly keys of selections from the key tables.

9013 - **H** - A B C 0- D - E J = Type

Type	Configuration key
protection class 1	X

9013 - H - **A** B C 0- D - E J = Terminals

Terminal L	Configuration key
screw terminal	A

9013 - H - A **B** C 0- D - E J = Terminals

Terminal N	Configuration key
screw terminal	A

Symbols similar as in table A

9013 - H - A B **C** 0- D - E J = Terminals

Terminal Ground	Configuration key
screw terminal	A

Symbols similar as in table A

9013 - H - A B C 0- **D** - E J = Color

Color	Configuration key
jet black; RAL9005	A
silver grey; RAL7001	B
pure white; RAL9010	D

standard color: black

9013 - H - A B C 0- D - **E** J = Style

Style	Configuration key
for cord assembly	8

9013 - H - A B C 0- D - E **J** = Condition

Condition	Configuration key
assembled	1
disassembled	2

Variants

Config. Code	Description	Order Number
9013-X-AAA0-A-81	9013, IEC Plug, E, 70°C, version: 1, L: screw terminal, N: screw terminal, ground: screw terminal, color: jet black; RAL9005, design: for cord assembly, condition:assembled	4310.0035
9013-X-AAA0-B-81	9013, IEC Plug, E, 70°C, version: 1, L: screw terminal, N: screw terminal, ground: screw terminal, color: silver grey; RAL7001, design: for cord assembly, condition:assembled	4310.0036

The listet variants should be available from stock Other versions on request www.schurter.com/contact

Packaging unit 50 Pcs

Accessories

	Description
	HN 14.110 PVC Strain Relief
	HN 14.45 PVC Strain Relief



HN 14.46
PVC Strain Relief

Mating Outlets/Connectors

Category / Description	
Appliance Outlet Overview complete	
IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	4787
IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	4788
IEC Appliance Outlet F, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	6600-3
IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	6600-4
Appliance Outlet further types to 9013	
Appliance Outlet shuttered Overview complete	
IEC Appliance Outlet F Shuttered, Screw-on Mounting, Front Side, Solder or Quick-connect Terminal	4721
IEC Appliance Outlet F Shuttered, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal	4723
Appliance Outlet shuttered further types to 9013	
Connector Overview complete	
IEC Connector C15, Rewireable, Straight	0101
IEC Connector C15A, Rewireable, Straight	0102
IEC Connector C15A, Rewireable, Straight	0102-G
IEC Connector C15A, Rewireable, Angled	0112
IEC Connector C13, Rewireable, Angled	4012
Connector further types to 9013	...
Distribution Unit Overview complete	
Distribution Unit for Snap-in Mounting with 1 IEC Appliance Inlet C14 and 1 Appliance Outlet F	0712
Strip Block for Snap-in Mounting with up to 7 IEC Appliance Outlets F	0909
Distribution Unit with 1 IEC Appliance Inlet C14 or Power Cord, 4 IEC Appliance Outlets F and Extra Components	4740
Distribution Unit with 1 IEC Appliance Inlet C14 and 2 Appliance Outlets F, Shuttered	4741
Distribution Unit with 1 IEC Appliance Inlet C14 and 4 Appliance Outlets F	4747
Distribution Unit further types to 9013	...
Power Cord Overview complete	
Power Cord with IEC Connector C13, Angled	0311
Power Cord with IEC Connector C13, Angled	3011
Power Cord with IEC Connector C13, Angled	3012
Power Cord with IEC Connector C13, Angled	3013
Power Cord with IEC Connector C13	3020
Power Cord further types to 9013	...
Power Entry Module Overview complete	
IEC Appliance Outlet F with Fuseholder 1-pole	4719
IEC Appliance Inlet C14 with modular extended Components	Felcom 64
IEC Appliance Inlet C14 with Appliance Outlet F	KP (Outlet)
IEC Appliance Inlet C14 with Appliance Outlet F, Line Switch 2-pole and Voltage Selector	PMM
Power Entry Module further types to 9013	

Category / Description



Power Entry Module with line filter Overview complete

IEC Appliance Inlet C14 Modular Assembling Options	Felcom 54

Power Entry Module with line filter further types to 9013

SCHURTER ELECTRONIC COMPONENTS

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.