

High performance video signal switcher

Five inputs Dual Circuits Video Signal Switchers

BA7626F/FS

•Description

The BA7626F/FS is a 5-input video signal switching circuit with a broadband 6 dB amplifier that was developed for AV amplifier input switching. Just by devising a transistor buffer in the output, player switching of two VCR or other videotape players and three DVD players or other playback devices is possible. Moreover, input switching and switching of recording to a VCR or other device also can be performed independently.

Since the input circuit of the BA7626F/FS is terminated by 20k Ω impedance, it is suited to not only video signal but also chroma signal or audio signal switching.

•Features

- 1) 5 input line, 3 output line switching
- 2) Built-in 6 dB amplifier
- 3) 5V operating voltage
- 4) 20k Ω input impedance

•Use

AV amplifiers, Video selectors, etc.

•Lineup

Part No.	BA7626F	BA7626FS
Package	SOP16	SSOP-A16
Input type	Bias (R=20k Ω)	

•Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	Vcc	9	V
Power dissipation	BA7626F	300 ※1	mW
	BA7626FS	600 ※2	
Operating temperature	Topr	-25~+70	°C
Storage temperature	Tstg	-55~+125	°C

※1 Deratings is done at 3.0mW/°C above Ta=25°C. (BA7626F)

※2 Deratings is done at 6.0mW/°C above Ta=25°C. (BA7626FS)

•Operating Range(Ta=25°C)

Parameter	Symbol	Min	Typ	Max	Unit
Power supply voltage	Vcc	4.5	5.0	5.5	V

Aug.2008

●Electrical characteristics (Unless otherwise noted Ta=25°C, Vcc=5.0V)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Circuit current		ICC	—	15.0	20.0	mA	—
Maximum output level	BA7626F/FS	Vom	2.3	2.5	—	Vp-p	f=1kHz, THD=0.5%
Voltage gain		G _V	5.7	6.2	6.7	dB	f=1MHz, V _{IN} =1Vp-p
Interchannel crosstalk		G _T	—	-65	-45	dB	f=4.43MHz, V _{IN} =1Vp-p
Mute level		CTM	—	-35	-25	dB	f=4.43MHz, V _{IN} =1Vp-p
Frequency characteristic		G _f	-3	0	+3	dB	10MHz/1MHz, V _{IN} =1Vp-p
Input impedance		Z _{IN}	16	20	24	kΩ	
CTL pin switching level		V _{TH}	2.2	—	3.3	V	—

※ This product is not designed for protection against radioactive rays.

●Truth table

Input			Output	Input			Output	Input			Output
A	B	E	MONOUT	C	D	E	VOUT1	C	D	E	VOUT2
L	L	※	IN1	L	L	※	—	L	L	※	IN1
H	L	※	IN2	H	L	※	IN2	H	L	※	—
L	H	※	IN3	L	H	※	IN3	L	H	※	IN3
H	H	L	IN4	H	H	L	IN4	H	H	L	IN4
H	H	H	IN5	H	H	H	IN5	H	H	H	IN5

※ Indicates "don't care"(H or L)

●Block diagram

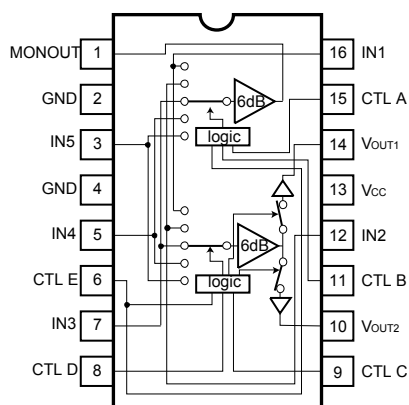


Fig.1

●Application circuit

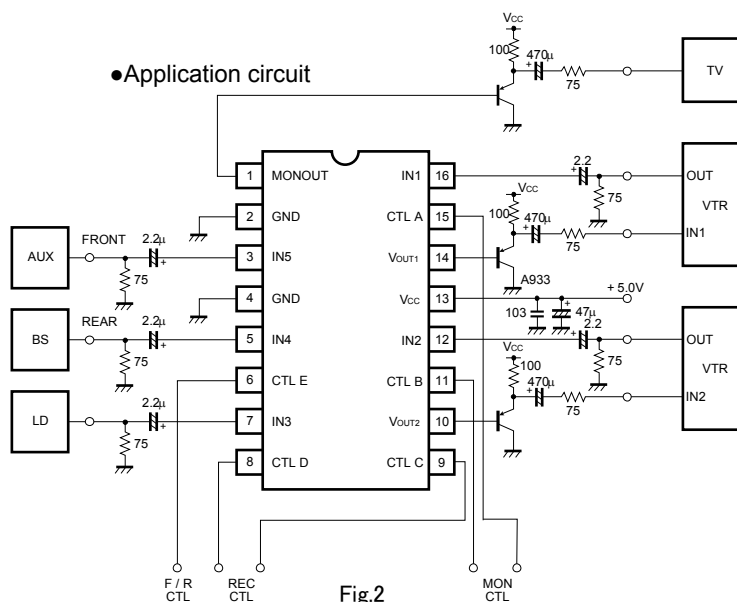


Fig.2


●Cautions on use

- 1) Numbers and data in entries are representative design values and are not guaranteed values of the items.
- 2) Although we are confident in recommending the sample application circuits, carefully check their characteristics further when using them. When modifying externally attached component constants before use, determine them so that they have sufficient margins by taking into account variations in externally attached components and the Rohm LSI, not only for static characteristics but also including transient characteristics.
- 3) Absolute maximum ratings
If applied voltage, operating temperature range, or other absolute maximum ratings are exceeded, the LSI may be damaged. Do not apply voltages or temperatures that exceed the absolute maximum ratings. If you think of a case in which absolute maximum ratings are exceeded, enforce fuses or other physical safety measures and investigate how not to apply the conditions under which absolute maximum ratings are exceeded to the LSI.
- 4) GND potential
Make the GND pin voltage such that it is the lowest voltage even when operating below it. Actually confirm that the voltage of each pin does not become a lower voltage than the GND pin, including transient phenomena.
- 5) Thermal design
Perform thermal design in which there are adequate margins by taking into account the allowable power dissipation in actual states of use.
- 6) Shorts between pins and misinstallation
When mounting the LSI on a board, pay adequate attention to orientation and placement discrepancies of the LSI. If it is misinstalled and the power is turned on, the LSI may be damaged. It also may be damaged if it is shorted by a foreign substance coming between pins of the LSI or between a pin and a power supply or a pin and a GND.
- 7) Operation in strong magnetic fields
Adequately evaluate use in a strong magnetic field, since there is a possibility of malfunction.

●Pin descriptions (Ta=25°C, VCC=5V)

Pin No.	Pin name	Equivalent circuit
		BA7626F/FS
3 5 7 12 16	IN5 IN4 IN3 IN2 IN1	
6 8 9 11 15	CTLE CTLD CTLC CTLB CTLA	
1	MONOUT	
10 14	VOUT2 VOUT1	

●Selection of order type




Part. No.
BA7626F
BA7626FS

Tape and Reel information
BA7626F...E2(Embossed carrier tape)
BA7626FS...E2(Embossed carrier tape)

SOP16


<Dimension>



(Unit:mm)

<Tape and Reel information>


Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

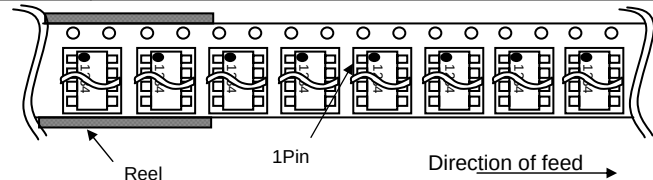

※When you order , please order in times the amount of package quantity.

SSOP-A16


<Dimension>



(Unit:mm)

<Tape and Reel information>

Tape	Embossed carrier tape
Quantity	2500pcs
Direction of feed	E2 (The direction is the 1pin of product is at the upper left when you hold reel on the left hand and you pull out the tape on the right hand)

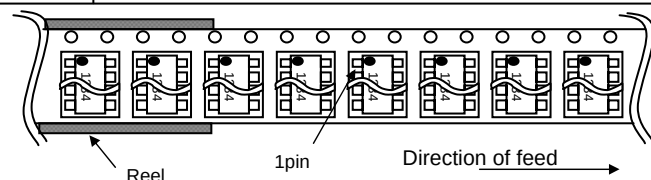

※When you order , please order in times the amount of package quantity.

- The contents described herein are correct as of August, 2008
- The contents described herein are subject to change without notice. For updates of the latest information, please contact and confirm with ROHM CO.,LTD.
- Any part of this application note must not be duplicated or copied without our permission.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams and information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by ROHM CO., LTD. is granted to any such buyer.
- The products described herein utilize silicon as the main material.
- The products described herein are not designed to be X ray proof.

The products listed in this catalog are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys). Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

Contact us for further information about the products.

San Diego
Atlanta
Boston
Chicago
Dallas
Denver
Detroit
Nashville
Mexico
Düsseldorf
Munich
Stuttgart
France
United Kingdom
Denmark
Espoo
Salo
Oulu
Barcelona
Hungary
Poland
Russia
Seoul
Masan
Dalian
Beijing

TEL: +1-858-625-3630
TEL: +1-770-754-5972
TEL: +1-978-371-0382
TEL: +1-847-368-1006
TEL: +1-469-287-5366
TEL: +1-303-708-0908
TEL: +1-248-348-9920
TEL: +1-615-620-6700
TEL: +52-33-3123-2001
TEL: +49-2154-9210
TEL: +49-8999-216168
TEL: +49-711-7272-370
TEL: +33-1-5697-3060
TEL: +44-1-908-306700
TEL: +45-3694-4739
TEL: +358-9725-54491
TEL: +358-2-7332234
TEL: +358-8-5372930
TEL: +34-9375-24320
TEL: +36-1-4719338
TEL: +48-22-5757213
TEL: +7-495-739-41-74
TEL: +82-2-8182-700
TEL: +82-55-240-6234
TEL: +86-411-8230-8549
TEL: +86-10-8525-2483

FAX: +1-858-625-3670
FAX: +1-770-754-0691
FAX: +1-928-438-7164
FAX: +1-847-368-1008
FAX: +1-469-362-7973
FAX: +1-303-708-0858
FAX: +1-248-348-9942
FAX: +1-615-620-6702
FAX: +52-33-3123-2002
FAX: +49-2154-921400
FAX: +49-8999-216176
FAX: +49-711-7272-3720
FAX: +33-1-5697-3080
FAX: +44-1-908-235788
FAX: +45-3694-4789
FAX: +358-9-7255-4499
FAX: +358-2-7332237
FAX: +358-8-5372931
FAX: +34-9375-24410
FAX: +36-1-4719339
FAX: +48-22-5757001
FAX: +7-495-739-41-74
FAX: +82-2-8182-715
FAX: +82-55-240-6236
FAX: +86-411-8230-8537
FAX: +86-10-8525-2489

Tianjin
Shanghai
Hangzhou
Nanjing
Ningbo
Qingdao
Suzhou
Wuxi
Shenzhen
Dongguan
Fuzhou
Guangzhou
Huizhou
Xiamen
Zhuhai
Hong Kong
Taipei
Kaohsiung
Singapore
Philippines
Thailand
Kuala Lumpur
Penang
Kyoto
Yokohama

TEL: +86-22-23029181
TEL: +86-21-6279-2727
TEL: +86-571-87658072
TEL: +86-25-8689-0015
TEL: +86-574-87654201
TEL: +86-532-5779-312
TEL: +86-510-82702693
TEL: +86-755-8307-1300
TEL: +86-769-8393-3320
TEL: +86-591-8801-8698
TEL: +86-20-3878-8100
TEL: +86-752-205-1054
TEL: +86-592-238-5705
TEL: +86-756-3232-480
TEL: +852-2-740-6262
TEL: +886-2-2500-6956
TEL: +886-7-237-0881
TEL: +65-6332-2322
TEL: +63-2-807-6872
TEL: +66-2-254-4890
TEL: +60-3-7958-8355
TEL: +60-4-2286453
TEL: +81-75-365-1218
TEL: +81-45-476-2290

FAX: +86-22-23029183
FAX: +86-21-6247-2066
FAX: +86-571-87658071
FAX: +86-25-8689-0393
FAX: +86-574-87654208
FAX: +86-532-5779-653
FAX: +86-510-82702992
FAX: +86-755-8307-2300
FAX: +86-769-8398-4140
FAX: +86-591-8801-8690
FAX: +86-20-3825-5965
FAX: +86-752-205-1059
FAX: +86-592-239-8380
FAX: +86-756-3232-460
FAX: +852-2-375-8971
FAX: +886-2-2503-2869
FAX: +886-7-238-7332
FAX: +65-6332-5662
FAX: +63-2-809-1422
FAX: +66-2-256-6334
FAX: +60-3-7958-8377
FAX: +60-4-2286452
FAX: +81-75-365-1228
FAX: +81-45-476-2295

Excellence in Electronics

ROHM

ROHM CO., LTD.

21 Saiin Mizosaki-cho, Ukyo-ku, Kyoto
615-8585, Japan
TEL: +81-75-311-2121 FAX: +81-75-315-0172
URL: <http://www.rohm.com>

Published by
KTC LSI Development Headquarters
LSI Business Promotion Group

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

It is our top priority to supply products with the utmost quality and reliability. However, there is always a chance of failure due to unexpected factors. Therefore, please take into account the derating characteristics and allow for sufficient safety features, such as extra margin, anti-flammability, and fail-safe measures when designing in order to prevent possible accidents that may result in bodily harm or fire caused by component failure. ROHM cannot be held responsible for any damages arising from the use of the products under conditions out of the range of the specifications or due to non-compliance with the NOTES specified in this catalog.

Thank you for your accessing to ROHM product informations.

More detail product informations and catalogs are available, please contact your nearest sales office.

ROHM Customer Support System

THE AMERICAS / EUROPE / ASIA / JAPAN

www.rohm.com

Contact us : webmaster@rohm.co.jp