

Features and Benefits

MIIM™ Fiber Optic patch cords are used to connect MIIM fiber panels within the MIIM System. MIIM patch cords incorporate a monitoring cable along with contact points on the patch cord connectors that activate the detection mechanism in the MIIM patch panel. When used with the rest of the MIIM system, the patch cords will provide connectivity information to the MIIM system.

- Robust duplex housings protect fibers
- Monitoring contact interfaces with MIIM fiber patch panels
- MIIM patch cords are constructed from two fibers contained in an outer jacket
- Standard jacket material is Low Smoke Zero Halogen (LSOH)
- Available in singlemode (OS1, OS2) and multimode (OM1, OM2, OM3, OM4) constructions

Commercial Standards

ISO/IEC 11801:2002
ANSI/TIA /EIA 568-C.3
ICEA-596

Pending Approvals
UL 1863

Fire Propagation Tests

LSOH

Technical Information

Mechanical Characteristics

Connector Type: Duplex LC
Durability: 500 insertions
Cable Weight: 1m - 18g
2m - 34g
3m - 49g
5m - 83g
10m - 157g
Temperature range:
Installation: -20°C to 50°C
Operation: -20°C to 50°C
Storage: -50°C to 80°C

Nominal Outside Diameter:
6 mm x 2.76 mm

Minimum Bend Radius:

Installation 4.1 cm

Long Term 2.8 cm

Maximum Long Term Tensile: 300 Nm

Number of Fibers Terminated: 2

Cable Assembly Length Tolerance:
< 15 m = -0 +/-100 mm
>15 m = -0 + 1%

Sheath Colors

62.5/125μ OM1: Orange

50/125μ OM2: Grey

50/125μ OM3: Aqua

50/125μ OM4: Aqua

9/125μ OS1: Yellow

9/125μ OS2: Yellow

Electrical/Optical Characteristics

Maximum Insertion Loss:

OS1, OS2: 0.3 dB Maximum

OM1, OM2, OM3, OM4: 0.3 dB
Maximum


Return Loss:

OS1, OS2

UPC: > 50 dB Min

Multimode Fiber Specification

Fiber Type	ISO Class	Bandwidth (OFL)	"Maximum Attenuation (dB/km) (850nm / 1300 nm)
62.5 / 125μ	OM1	200 / 500	3.5 / 1.5
50 / 125μ	OM2	500 / 500	3.5 / 1.5
50 / 125μ	OM3	1500 / 500	3.5 / 1.5
50 / 125μ	OM4	3500 / 500	3.5 / 1.5

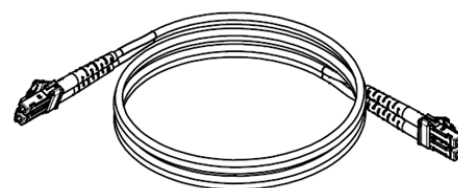

MOLEX PREMISE NETWORKS

Americas
Tel: 630 969 4550
www.molexpn.com

EMEA
Tel: 44 (0)2392 205800
www.molexpn.co.uk

APAC
Tel: 61 3 9971 7111
www.molexpn.com.au

FEATURES AND SPECIFICATIONS

molex[®] MIIM Fiber Optic Patch Cords

Singlemode Fiber Specification

Fiber Type	ISO Class	Bandwidth (OFL)	Maximum Attenuation (dB/km) (1300nm / 1500 nm)
9 / 125μ	OS1	N/A	1.0 / 1.0
9 / 125μ	OS2	N/A	0.4 / 0.4

ORDERING INFORMATION

1m Order No.	2m Order No.	3m Order No.	5m Order No.	10m Order No.	Description
91.PP.6A2.00100	91.PP.6A2.00200	91.PP.6A2.00300	91.PP.6A2.00500	91.PP.6A2.01000	MIIM OFPC LC-LC Dup MM OM1 3MM, LS0H
91.PP.5A2.00100	91.PP.5A2.00200	91.PP.5A2.00300	91.PP.5A2.00500	91.PP.5A2.01000	MIIM OFPC LC-LC Dup MM OM2 3MM, LS0H
91.PP.3A2.00100	91.PP.3A2.00200	91.PP.3A2.00300	91.PP.3A2.00500	91.PP.3A2.01000	MIIM OFPC LC-LC Dup MM OM3 3MM, LS0H
91.PP.4A2.00100	91.PP.4A2.00200	91.PP.4A2.00300	91.PP.4A2.00500	91.PP.4A2.01000	MIIM OFPC LC-LC Dup MM OM4 2MM, LS0H
91.PP.8A2.00100	91.PP.8A2.00200	91.PP.8A2.00300	91.PP.8A2.00500	91.PP.8A2.01000	MIIM OFPC LC-LC Dup SM OS1 3MM, LS0H
91.PP.2A2.00100	91.PP.2A2.00200	91.PP.2A2.00300	91.PP.2A2.00500	91.PP.2A2.01000	MIIM OFPC LC-LC Dup SM OS2 2MM, LS0H

MOLEX PREMISE NETWORKS

Americas
Tel: 630 969 4550
www.molexpn.com

EMEA
Tel: 44 (0)2392 205800
www.molexpn.co.uk

APAC
Tel: 61 3 9971 7111
www.molexpn.com.au