
TPD4S014 EVM

Introduction

The TPD4S014 is a single-chip solution for USB charger port protection. This device offers low capacitance TVS type ESD clamps for the D+, D– and standard Capacitance for the ID pin. On the VBUS pin, this device can handle over-voltage protection up to 28 V. The over voltage lock-out feature ensures that, if there is a fault condition at the VBUS line, the TPD4S014 is able to isolate the VBUS line and protect the internal circuitry from damage.

Similarly, the under voltage lock out feature ensures that there is no power drain from the internal VCC plane to external VBUS side in case there is short to GND. There is a 16 ms turn-on delay after VBUS crosses the under voltage lockout threshold, in order to let the voltage stabilize before closing the switch. This function acts as a deglitch filter and prevents unnecessary switching if there is any ringing on the line during connection.

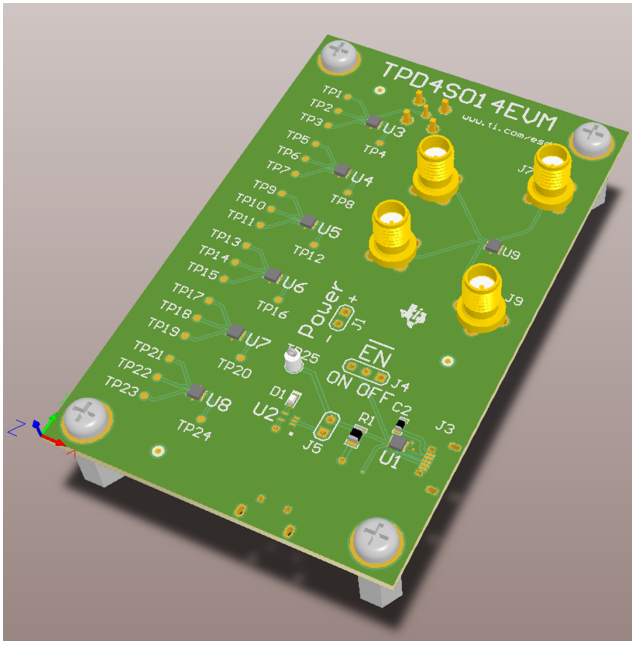

Highlighted Features

- Over-voltage protection functionality
- Under voltage lockout functionality
- USB connectors used for ease of use
- LED indicating fault condition
- Test point for EN and ACK signals
- D+, D– lines are routed as differential pair

1 EVM Description and Configuration

The TPD4S014EVM consists of four separate sections. One section is a USB2.0 pass through protected port, one section allows 4-port analysis, one section allows ESD testing of 6 devices, and another allows capturing a clamping waveform during an ESD event. All sections are powered up by a 1.8 V – 3.3 V supply. This supply is used for three purposes:

1. To provide the HI and LO logic levels for the EN signal
2. To provide a pullup voltage for the open drain ACK signal
3. To power the fault indicator LED

Copyright © 2011–2014, Texas Instruments Incorporated

2 Definitions

Contact Discharge — a method of testing in which the electrode of the ESD simulator is held in contact with the device-under-test (DUT).

Air Discharge — a method of testing in which the charged electrode of the ESD simulator approaches the DUT, and a spark to the DUT actuates the discharge.

ESD Simulator — a device that outputs IEC61000-4-2 compliance ESD waveforms shown in Figure 1 with adjustable ranges shown in Table 1 and Table 2.

IEC61000-4-2 has 4 classes of protection levels. Classes 1 – 4 are shown in Table 1. Stress tests should be incrementally tested to level 4 as shown in Table 2 until the point of failure. If the DUT does not fail at 8 kV, testing can continue in 2 kV increments until failure.

Table 1. IEC61000-4-2 Test Levels

Contact Discharge		Air Discharge	
Class	Test Voltage [± kV]	Class	Test Voltage [± kV]
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

Table 2. Waveform Parameters in Contact Discharge Mode

Stress Level Step	Simulator Voltage [kV]	Ipeak ±15% [A]	Rise Time ±25% [nS]	Current at 30ns ±30% [A]	Current at 60ns ±30% [A]
1	2	7.5	0.8	4	2
2	4	15	0.8	8	4
3	6	22.5	0.8	12	6
4	8	30	0.8	16	8

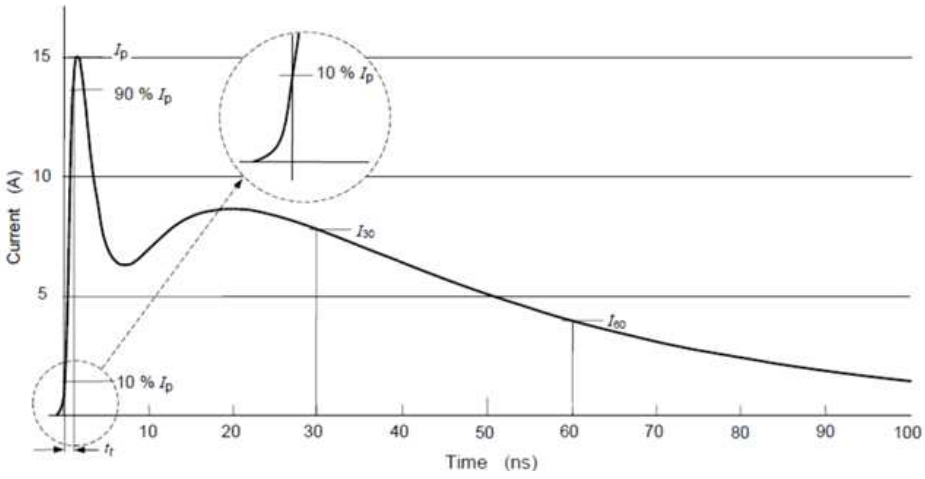


Figure 1. Ideal Contact Discharge Waveform of the Output Current of the ESD Simulator at 4 kV

Copyright © 2011–2014, Texas Instruments Incorporated

3 Setup

3.1 U1

TPD4S014DSQ (U1) section has a switch to toggle the polarity of the EN signal. There are labels indicating the ON and OFF positions of the switch. There are also test points that can be used to determine the logic level ACK signal. This section also has an LED which indicates a fault condition. Please note that the LED lights up when the ACK signal is at logic HI. This section is intended to illustrate the functionality of the device without any additional test equipment. Two USB2.0 Type AB female connectors (J2 & J3) can be used for capturing Eye Diagrams. Using either J2 as input and J3 as output, attach to a USB2.0 compliant Eye Diagram tester setup for the intended application. For all test procedures apply 1.8V – 3.3V to "+" of J1 and GND to "–" of J1.

Setup Procedure

1. The fault indication LED should light up when board power is applied.
2. Connect a USB cable to the Input connector (J3). Connect a variable power supply to the VBUS line on the other end of the cable. Set the Voltage on the power supply to < 2V.
3. Connect another USB cable to the output connector (J2) of the board. Connect a variable load to the VBUS line on the other end of the cable. Set the load to > 25 Ω
4. Slowly increase the Voltage on the input. The LED should turn OFF when the Voltage crosses 3V.
5. Continue to increase the voltage past 6V. When the voltage crosses 6V the LED should turn ON again indicating a fault (condition).

3.2 U3 – U8

Six TPD4S014DSQ's (U3 – U8) can be used for destructive electrostatic discharge (ESD) pass/fail ESD strikes. Specifically, they can be used for both IEC-61000-4-2 air and contact discharge tests. The following procedure ensures proper testing setup and method for both discharge tests. Each IO has a Test Pad (TP1 – TP24) directly connected to it.

3.2.1 Test Method and Set-Up

An example test setup is shown in Figure 2. Details of the testing table and ground planes can be found in the IEC 61000-4-2 test procedure. Ground the EVM using the banana connector labeled GND (J9). Discharge the ESD simulator on any of the Test Points TP1 – TP10. Contact and air-gap discharge are tested using the same simulator with the same discharge waveform. While the simulator is in direct contact with the test point during contact, it is not during air-gap.

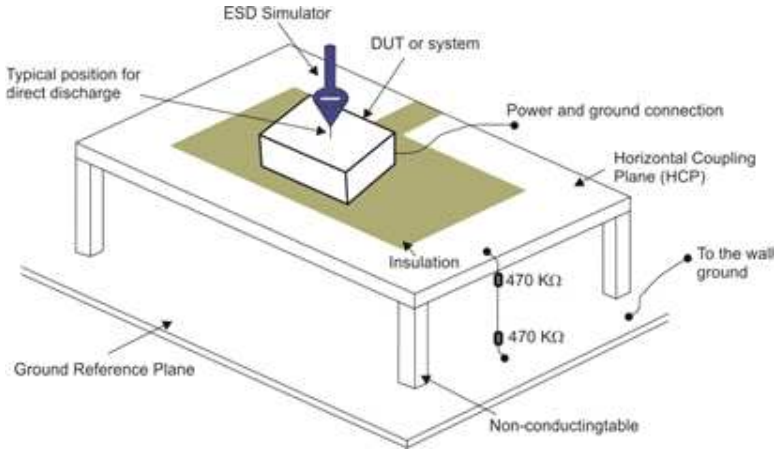


Figure 2. System Level ESD Test Setup

Copyright © 2011–2014, Texas Instruments Incorporated

Evaluation of Test Results

Connect the tested device on the EVM to a curve tracer both before and after ESD testing. After each incremental level, if the IV curve of the ESD protection diode shifts ±0.1V, or leakage current increases by a factor of ten, then the device is permanently damaged by ESD.

3.3 U3

U3 has a test point (J10) for capturing clamping waveforms during an ESD event. The following section describes capturing an ESD clamping waveforms.

Oscilloscope Setup

Without a proper procedure, capturing ESD clamping waveforms exposes the oscilloscope to potential voltages higher than the rating of the equipment. Proper methodology can mitigate any risk in this operation.

Recommended Equipment

- Minimum of 1 GHz bandwidth oscilloscope (recommended 2 GHz)
- Either of the following:
  - One 10X 50Ω attenuator and 0 Ω 0603 resistor (to be installed at R2).
  - Two 10X 50Ω attenuators and 150 Ω 0603 resistor (already installed at R2).
- 50 Ω shielded SMB cable.

Procedure

In order to protect the oscilloscope, attenuation of the measured signal is required. Here are two possible procedures for testing U3:

1. Using two 10X attenuators:
   - Install a 0 Ω resistor in R2.
   - Attach two 10X attenuators to the oscilloscope channel being used.
   - Attach the 50 Ω shielded SMB cable between J10 and the attenuator.
   - Set the scope attenuation factor to 100X.
   - Set the oscilloscope to trigger on a positive edge for (+) ESD or a negative edge for (–) ESD strikes. Set the trigger point to 20V.
   - Following *Section 3.2.1*, strike contact ESD to TP1.
2. Using one 10X attenuator:
   - Attach one 10X attenuator to the oscilloscope.
   - Attach the 50 Ω shielded SMB cable between J10 and the attenuator.
   - Set the scope attenuation factor to 40X.
   - Set the oscilloscope to trigger on a positive edge for (+) ESD or a negative edge for (–) ESD strikes. Set the trigger point to 20V.
   - Following *Section 3.2.1*, strike contact ESD to TP1.

Recommended settings for the time axis is 20 ns/div and for the voltage axis is 10 V division. The voltage level of the ESD applied to TP1 should not exceed ± 8 kV while capturing clamping waveforms.

Copyright © 2011–2014, Texas Instruments Incorporated

3.4 U9

TPD4S014 (U9) is configured with 4 SMA (J6 – J9) connectors to allow 4-port analysis with a vector network analyzer. Connect Port 1 to J6, Port 2 to J7, Port 3 to J8, and Port 4 to J9. This configuration allows for the following terminology in 4 port analysis:

- S_{11}: Return loss
- S_{21}: Insertion loss
- S_{31}: Near end cross talk
- S_{41}: Far end cross talk

4 Bill of Materials (BOM)

Quantity	Designator	Value	Description	Package Reference	Part Number	Manufacturer
1	C1	10 uF	CAP, CERM, 10uF, 6.3V, ±20%, X5R, 0603	603	C0603C106M9PACTU	Kemet
1	C2	10 uF	CAP, CERM, 10uF, 35V, -20%/+80%, Y5V 1206	1206	GMK316F106ZL-T	Taiyo Yuden
1	D1	Green	LED, Green, SMD	1.6x0.8x0.8mm	LTST-C190GKT	Lite-On
4	H1, H2, H3, H4		Machine Screw, Round, #4-40 x 1/4, Nylon, Philips panhead	Screw	NY PMS 440 0025 PH	B&F Fastener Supply
4	H5, H6, H7, H8		Standoff, Hex, 0.5"L #4-40 Nylon	Standoff	1902C	Keystone
2	J1, J5		Header, Male 2-pin, 100mil spacing,	0.100 inch x 2	PEC02SAAN	Sullins
2	J2, J3		Connector, USB Micro, Type AB	5.3x7.5 mm	SD-47590-001	Molex
1	J4		Header, Male 3-pin, 100mil spacing,	0.100 inch x 3	PEC03SAAN	Sullins
4	J6, J7, J8, J9		Connector, TH, SMA	SMA	142-0701-201	Emerson Network power
1	J10		Connector, SMB,Vertical RCP 0-4GHz, 50 ohm, TH	236x293x236 mil	131-3701-261	Emerson Network power
1	R1	10 k	RES, 10k ohm, 5%, 0.125W, 0805	805	CRCW080510K0JNEA	Vishay-Dale
1	R2	453 k	RES, 453k ohm, 1%, 0.1W, 0603	603	CRCW0603453KFKEA	Vishay-Dale
1	TP25		Test Point, Miniature, White, TH	White Miniature Testpoint	5002	Keystone
8	U1, U3, U4, U5, U6, U7, U8, U9		Complete USB Port Protection Device, 4 Channels, -40 to +85 degC, 10-pin SON (DSQ), Green (RoHS & no Sb/Br)	DSQ0010A	TPD4S014DSQR	Texas Instruments
1	U2		IC, Single Bus Buffer Gate With 3-States Outputs, OE Active Low	DCK	SN74LVC1G125DCK	TI

Copyright © 2011–2014, Texas Instruments Incorporated

5 Schematics

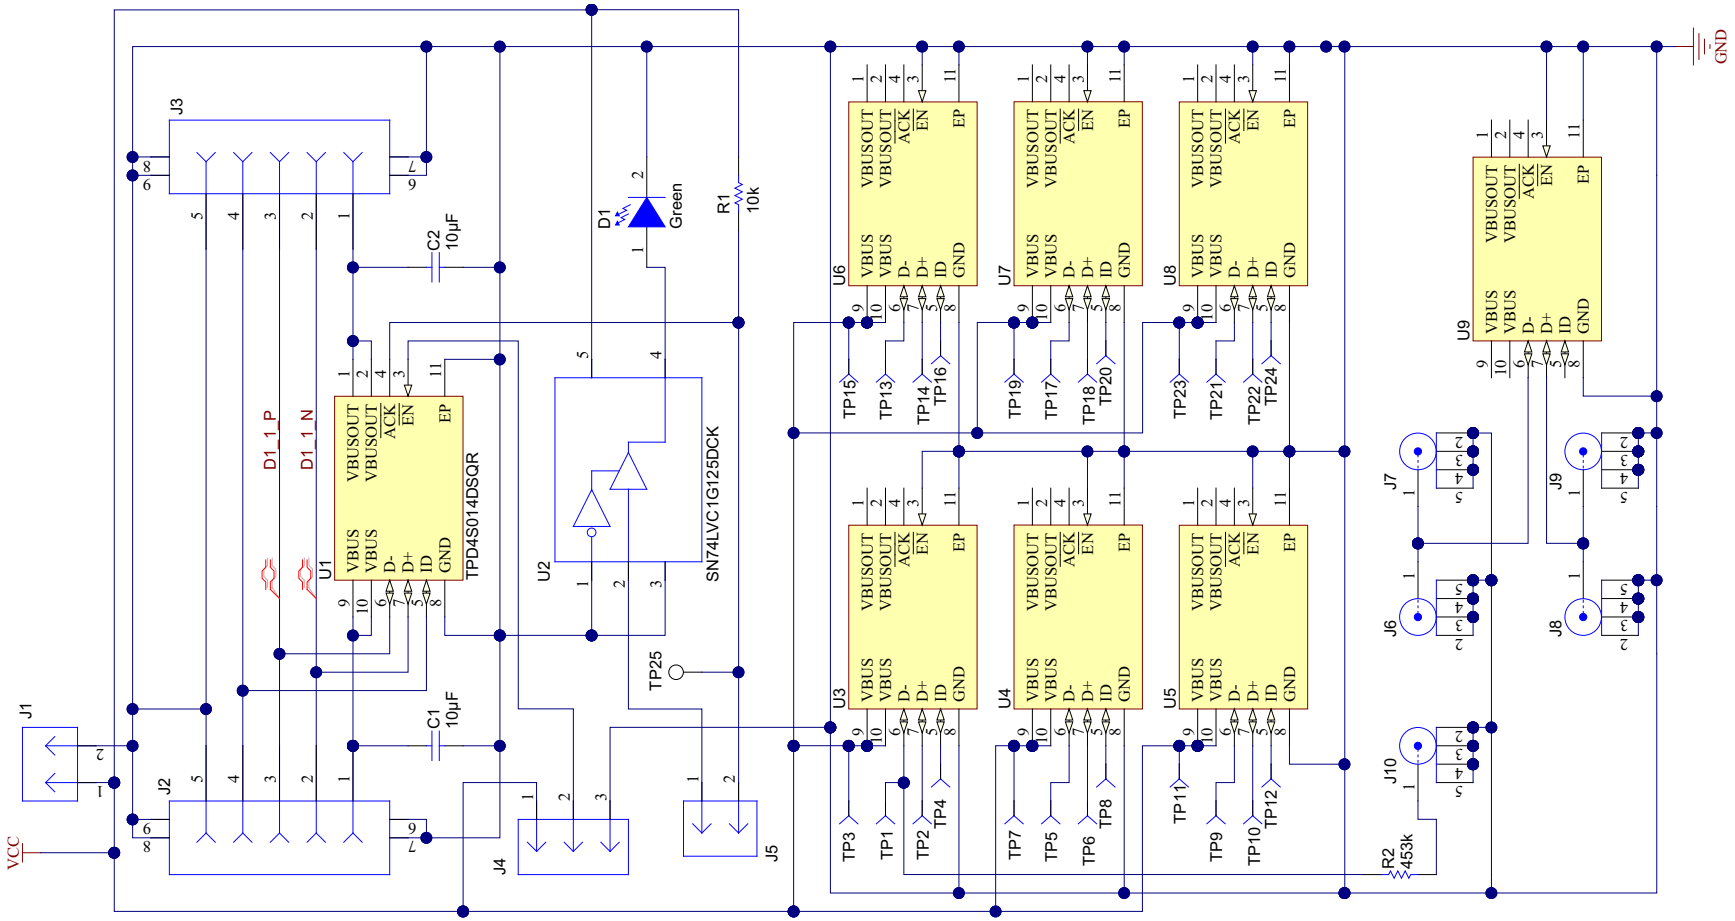


Figure 3. Schematics for TPD4S014EVM

Copyright © 2011–2014, Texas Instruments Incorporated

6 Layout

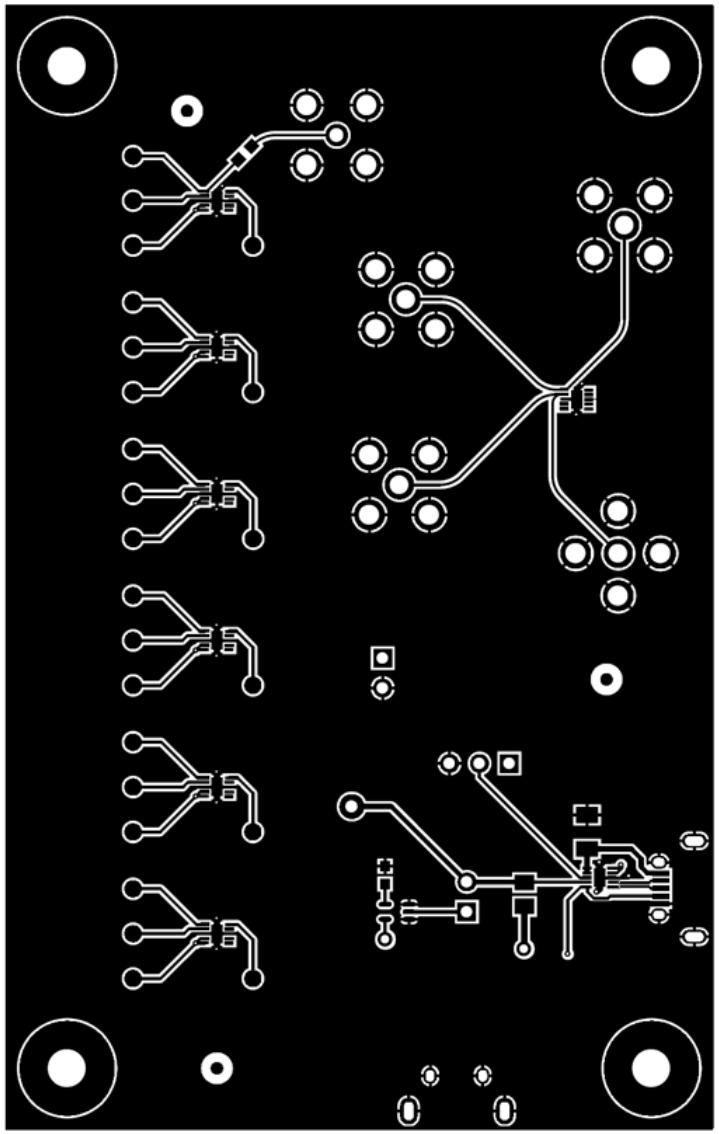


Figure 4. Top Layer

Copyright © 2011–2014, Texas Instruments Incorporated

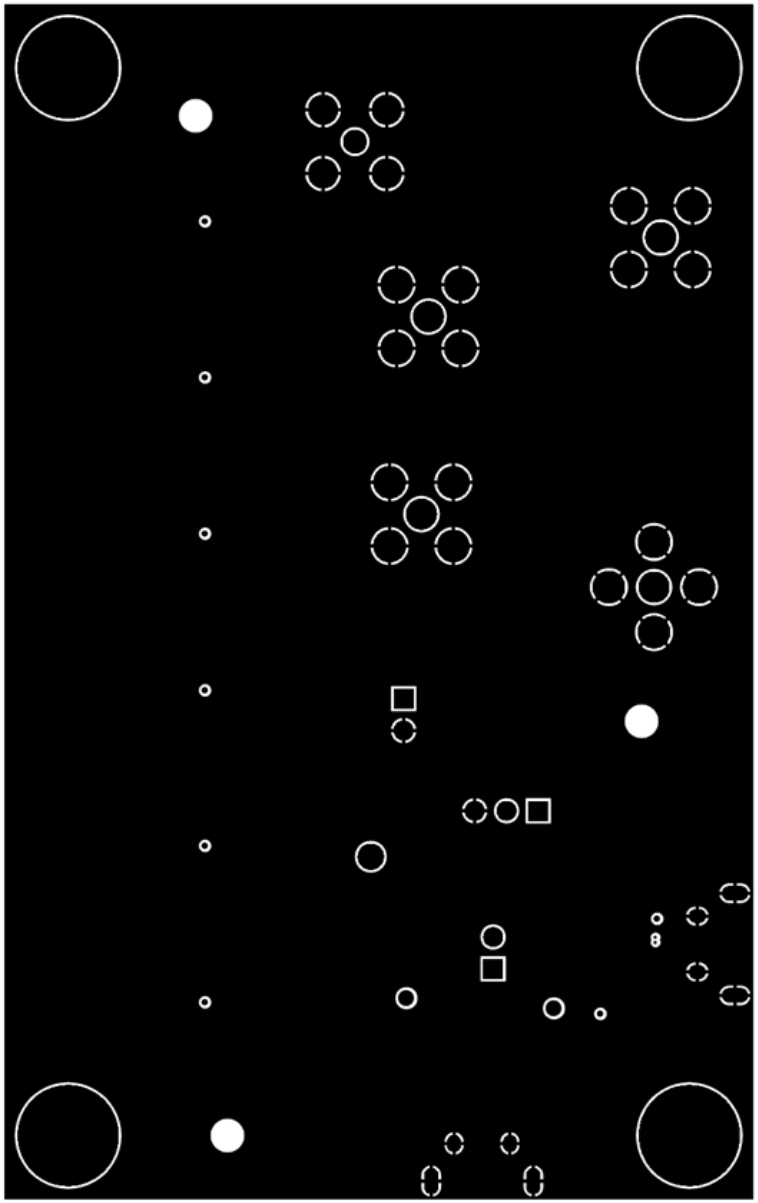


Figure 5. Layer 2

Copyright © 2011–2014, Texas Instruments Incorporated

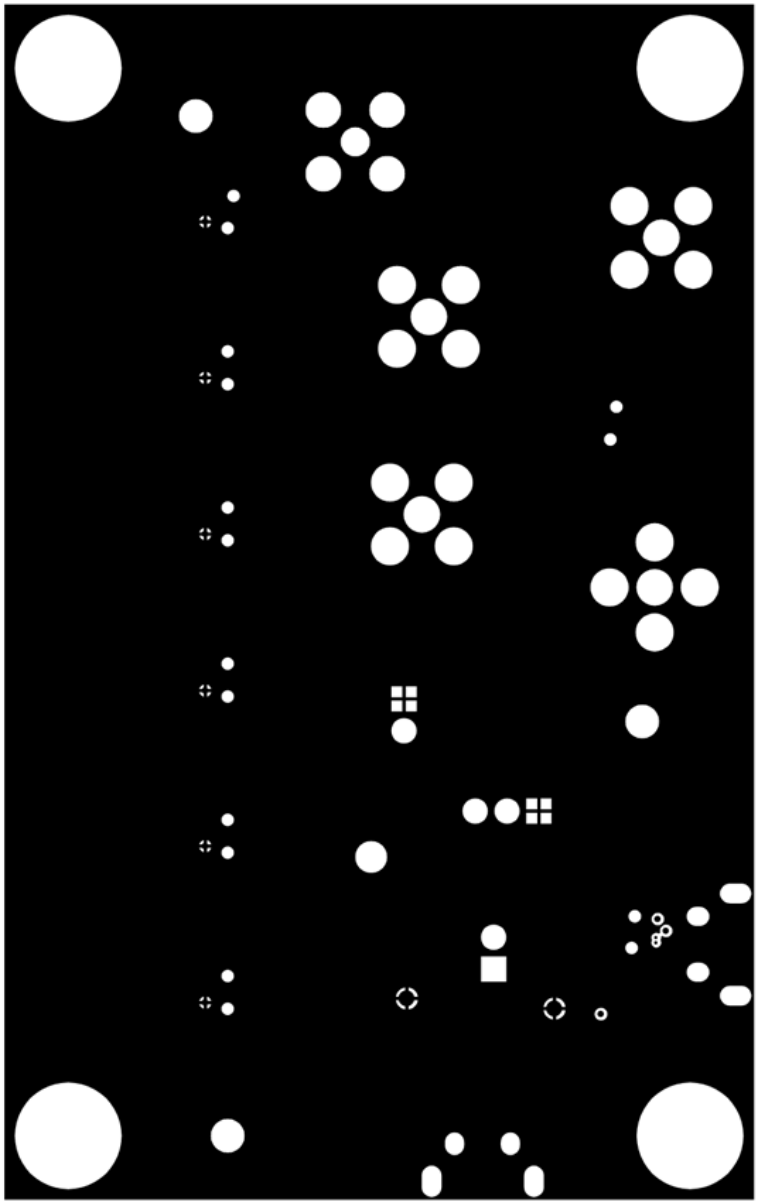


Figure 6. Layer 3

Copyright © 2011–2014, Texas Instruments Incorporated

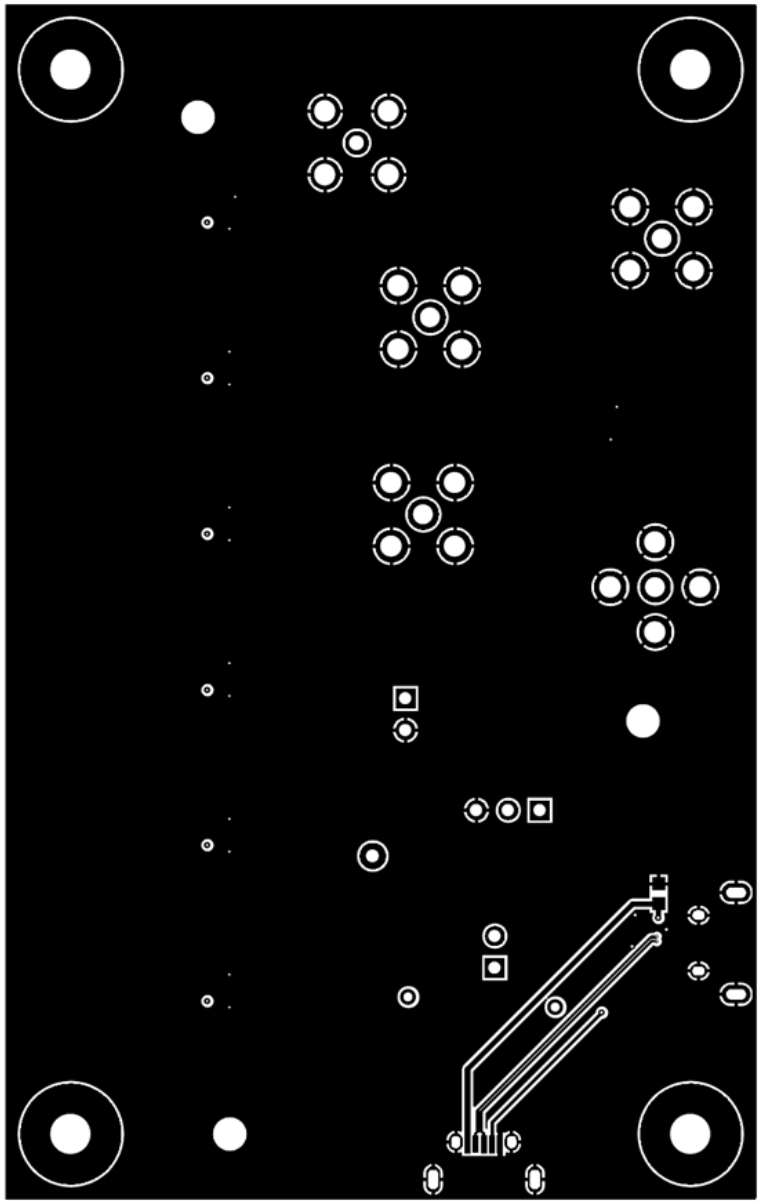


Figure 7. Bottom Layer

Copyright © 2011–2014, Texas Instruments Incorporated

Revision History

Changes from Original (June 2011) to A Revision	Page
• Updated entire EVM with new content.....	1

Copyright © 2011–2014, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2014, Texas Instruments Incorporated