

# ALM2402-Q1 Dual High-Current Amplifier

---



---



---

This document explains the usage and provides schematics for the simple ALM2402Q1EVM.

## Contents

1	Introduction .....	1
1.1	Using the ALM2402Q1EVM .....	1

## List of Figures

1	ALM2402Q1EVM Schematic .....	2
2	ALM2402Q1EVM Schematic (with DNP for open footprints) .....	3
3	ALM2402Q1EVM Bill of Materials .....	4

## 1 Introduction

### 1.1 Using the ALM2402Q1EVM

The ALM2402Q1EVM is intended to be very simple. Test points throughout the board allow a connection to every pin of the device. The board is full of empty resistor footprints in order to allow the customer full customization of their ALM2402Q1 test circuit. For most paths, non-populated resistor footprints are in parallel to allow for any variation in resistor sizes the customer may use. There are many more options for load resistor footprint sizes, as the ALM2402Q1 is able to output hundreds of mA. For small resistive loads, use the larger available footprints and populate with resistors with higher power dissipation ratings.

By default, the ALM2402Q1EVM is configured as a unity gain amplifier for both of the amplifiers inside the ALM2402Q1.

See [Figure 1](#) for the full schematic, and [Figure 2](#) for the board schematic explaining which resistors are not populated.

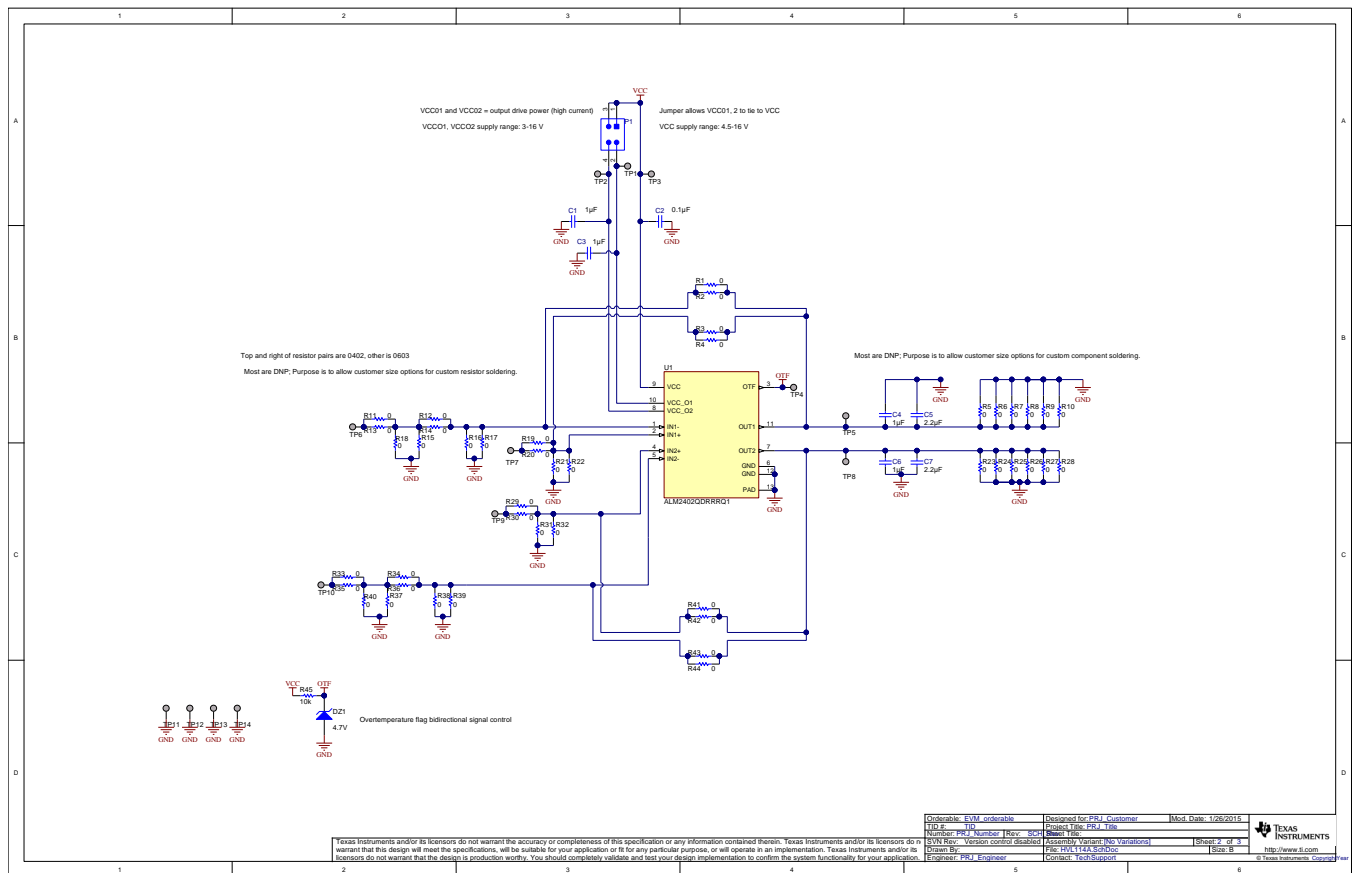


Figure 1. ALM2402Q1EVM Schematic



Designator	Quantity	Value	Description	PackageReference	PartNumber	Manufacturer
!PCB1	1		Printed Circuit Board		HVL114	Any
C1, C3	2	1uF	CAP, CERM, 1 $\mu$ F, 6.3 V, +/- 10%, X5R, 0603	0603	C1608X5R0J105K	TDK
C2	1	0.1uF	CAP, CERM, 0.1 $\mu$ F, 16 V, +/- 10%, X5R, 0603	0603	GRM188R61C104KA01D	MuRata
DZ1	1	4.7V	Diode, Zener, 4.7 V, 550 mW, SMB	SMB	1SMB5917BT3G	ON Semiconductor
P1	1		Header, 100mil, 2x2, Tin, SMT	2x2 100mil Tin Header	15-91-2040	Molex
R1, R43	2	0	RES, 0, 5%, 0.063 W, 0402	0402	ERJ-2GE0R00X	Panasonic
R13, R14, R20, R30, R35, R36	6	0	RES, 0, 5%, 0.1 W, 0603	0603	ERJ-3GEY0R00V	Panasonic
R45	1	10k	RES, 10 k, 5%, 0.063 W, 0402	0402	CRCW040210K0JNED	Vishay-Dale
TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8, TP9, TP10	10		Test Point, Miniature, SMT	Test Point, Miniature, SMT	5019	Keystone
U1	1		Dual Opamp with High Current Output, DRR0012A	DRR0012A	ALM2402QDRRRQ1	Texas Instruments
C4, C6	0	1uF	CAP, CERM, 1 $\mu$ F, 25 V, +/- 10%, X7R, 0805	0805	GRM21BR71E105KA99L	MuRata
C5, C7	0	2.2uF	CAP, CERM, 2.2 $\mu$ F, 50 V, +/- 10%, X7R, 1206	1206	GRM31CR71H225KA88L	MuRata
FID1, FID2, FID3	0		Fiducial mark. There is nothing to buy or mount.	Fiducial	N/A	N/A
R2, R4, R10, R16, R18, R21, R23, R31, R38, R40, R42, R44	0	0	RES, 0, 5%, 0.1 W, 0603	0603	ERJ-3GEY0R00V	Panasonic
R3, R9, R11, R12, R15, R17, R19, R22, R24, R29, R32, R33, R34, R37, R39, R41	0	0	RES, 0, 5%, 0.063 W, 0402	0402	ERJ-2GE0R00X	Panasonic
R5, R28	0	0	RES, 0, 5%, 1 W, 2512	2512	CRCW25120000Z0EG	Vishay-Dale
R6, R27	0	0	RES, 0, 5%, 0.75 W, 2010	2010	CRCW20100000Z0EF	Vishay-Dale
R7, R26	0	0	RES, 0, 5%, 0.25 W, 1206	1206	ERJ-8GEY0R00V	Panasonic
R8, R25	0	0	RES, 0, 5%, 0.125 W, 0805	0805	ERJ-6GEY0R00V	Panasonic

**Figure 3. ALM2402Q1EVM Bill of Materials**

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Applications Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)