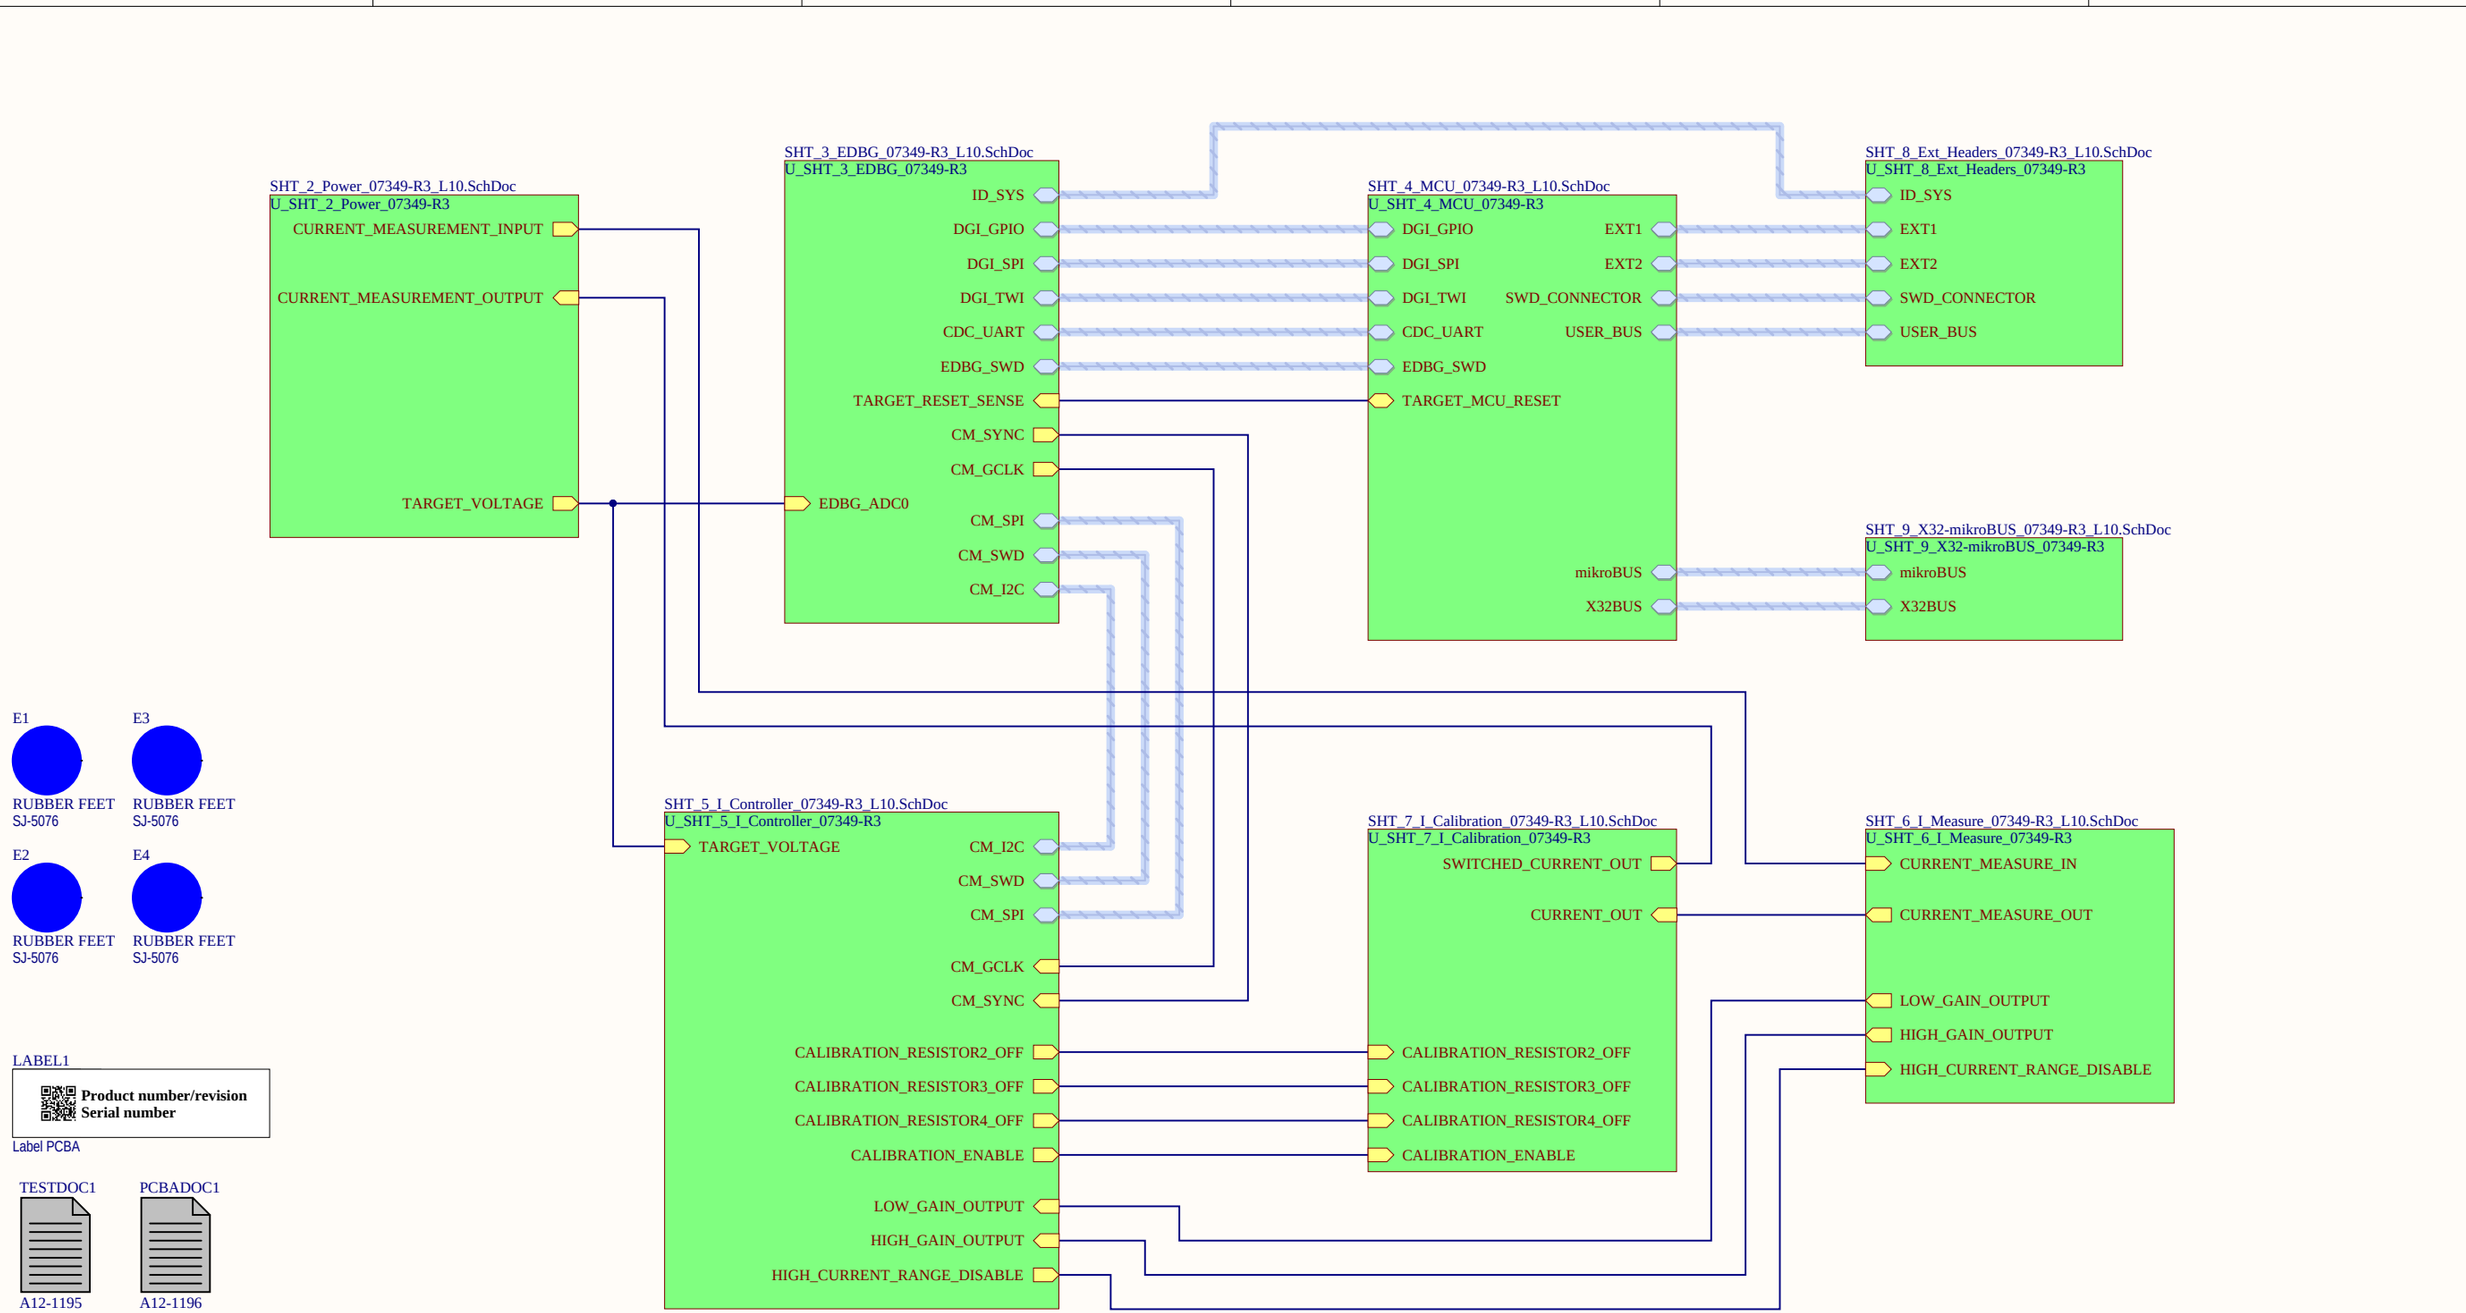


E1
RUBBER FEET
SJ-5076

E3
RUBBER FEET
SJ-5076

E2
RUBBER FEET
SJ-5076

E4
RUBBER FEET
SJ-5076

LABEL1
Product number/revision
Serial number
Label PCBA

TESTDOC1
A12-1195


PCBADOC1
A12-1196

PCB1
A08-2869
SAM L10 Xplained Pro PCB

FW1
A11-0196

TEST1
$ >_
A11-0358

Drawn By: Roger Hathaway	MICROCHIP
Engineer: Roger Hathaway	
PartNumber: 07-07349_L10	Project Title: *SAM L10 Xplained Pro*
Sheet Title: Top Level Block Diagram	Designed with Altium — Altium.com
Size: B	Sch #:03-07349_L10 · Date: 4/19/2018 11:02:24 AM
	Revision:3 · Sheet 1 of 9
File: SHT_1_Top Level_07349-R3_L10.SchDoc	

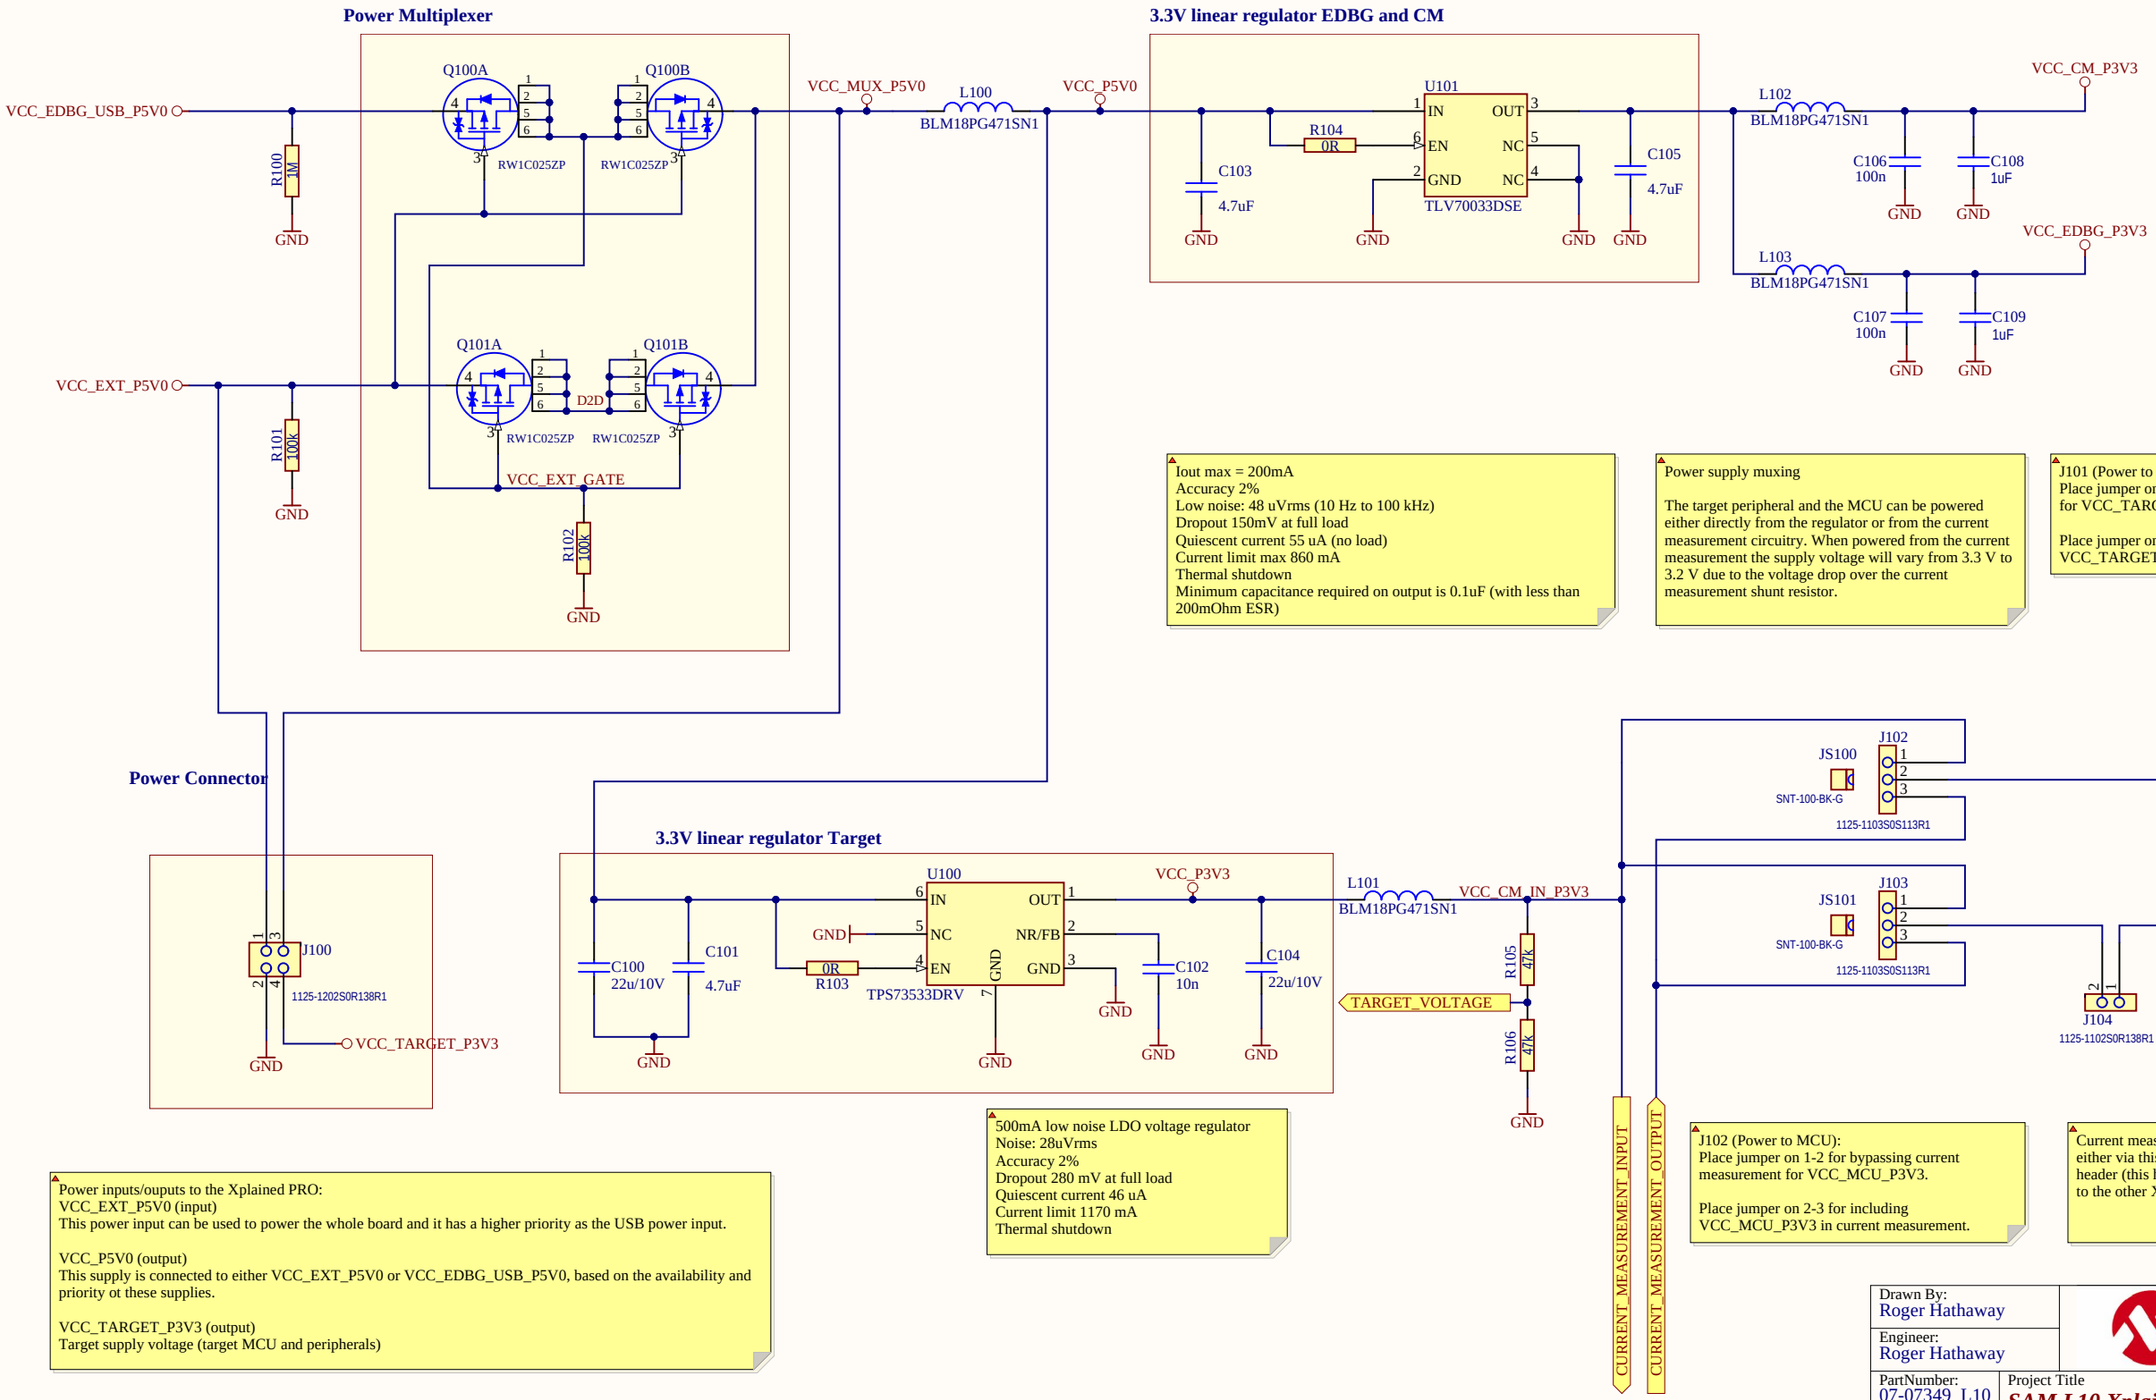


Drawn By:	Roger Hathaway
Engineer:	Roger Hathaway
PartNumber:	07-07349_L10
Project Title	*SAM L10 Xplained Pro*
Sheet Title	Input Source Select and Power Supplies
Size	B
Sch #:	03-07349_L10
Date:	4/19/2018 11:02:25 AM
Revision:	3
Sheet	2 of 9
File:	SHT_2_Power_07349-R3_L10.SchDoc

MICROCHIP

Designed with Altium

Altium.com

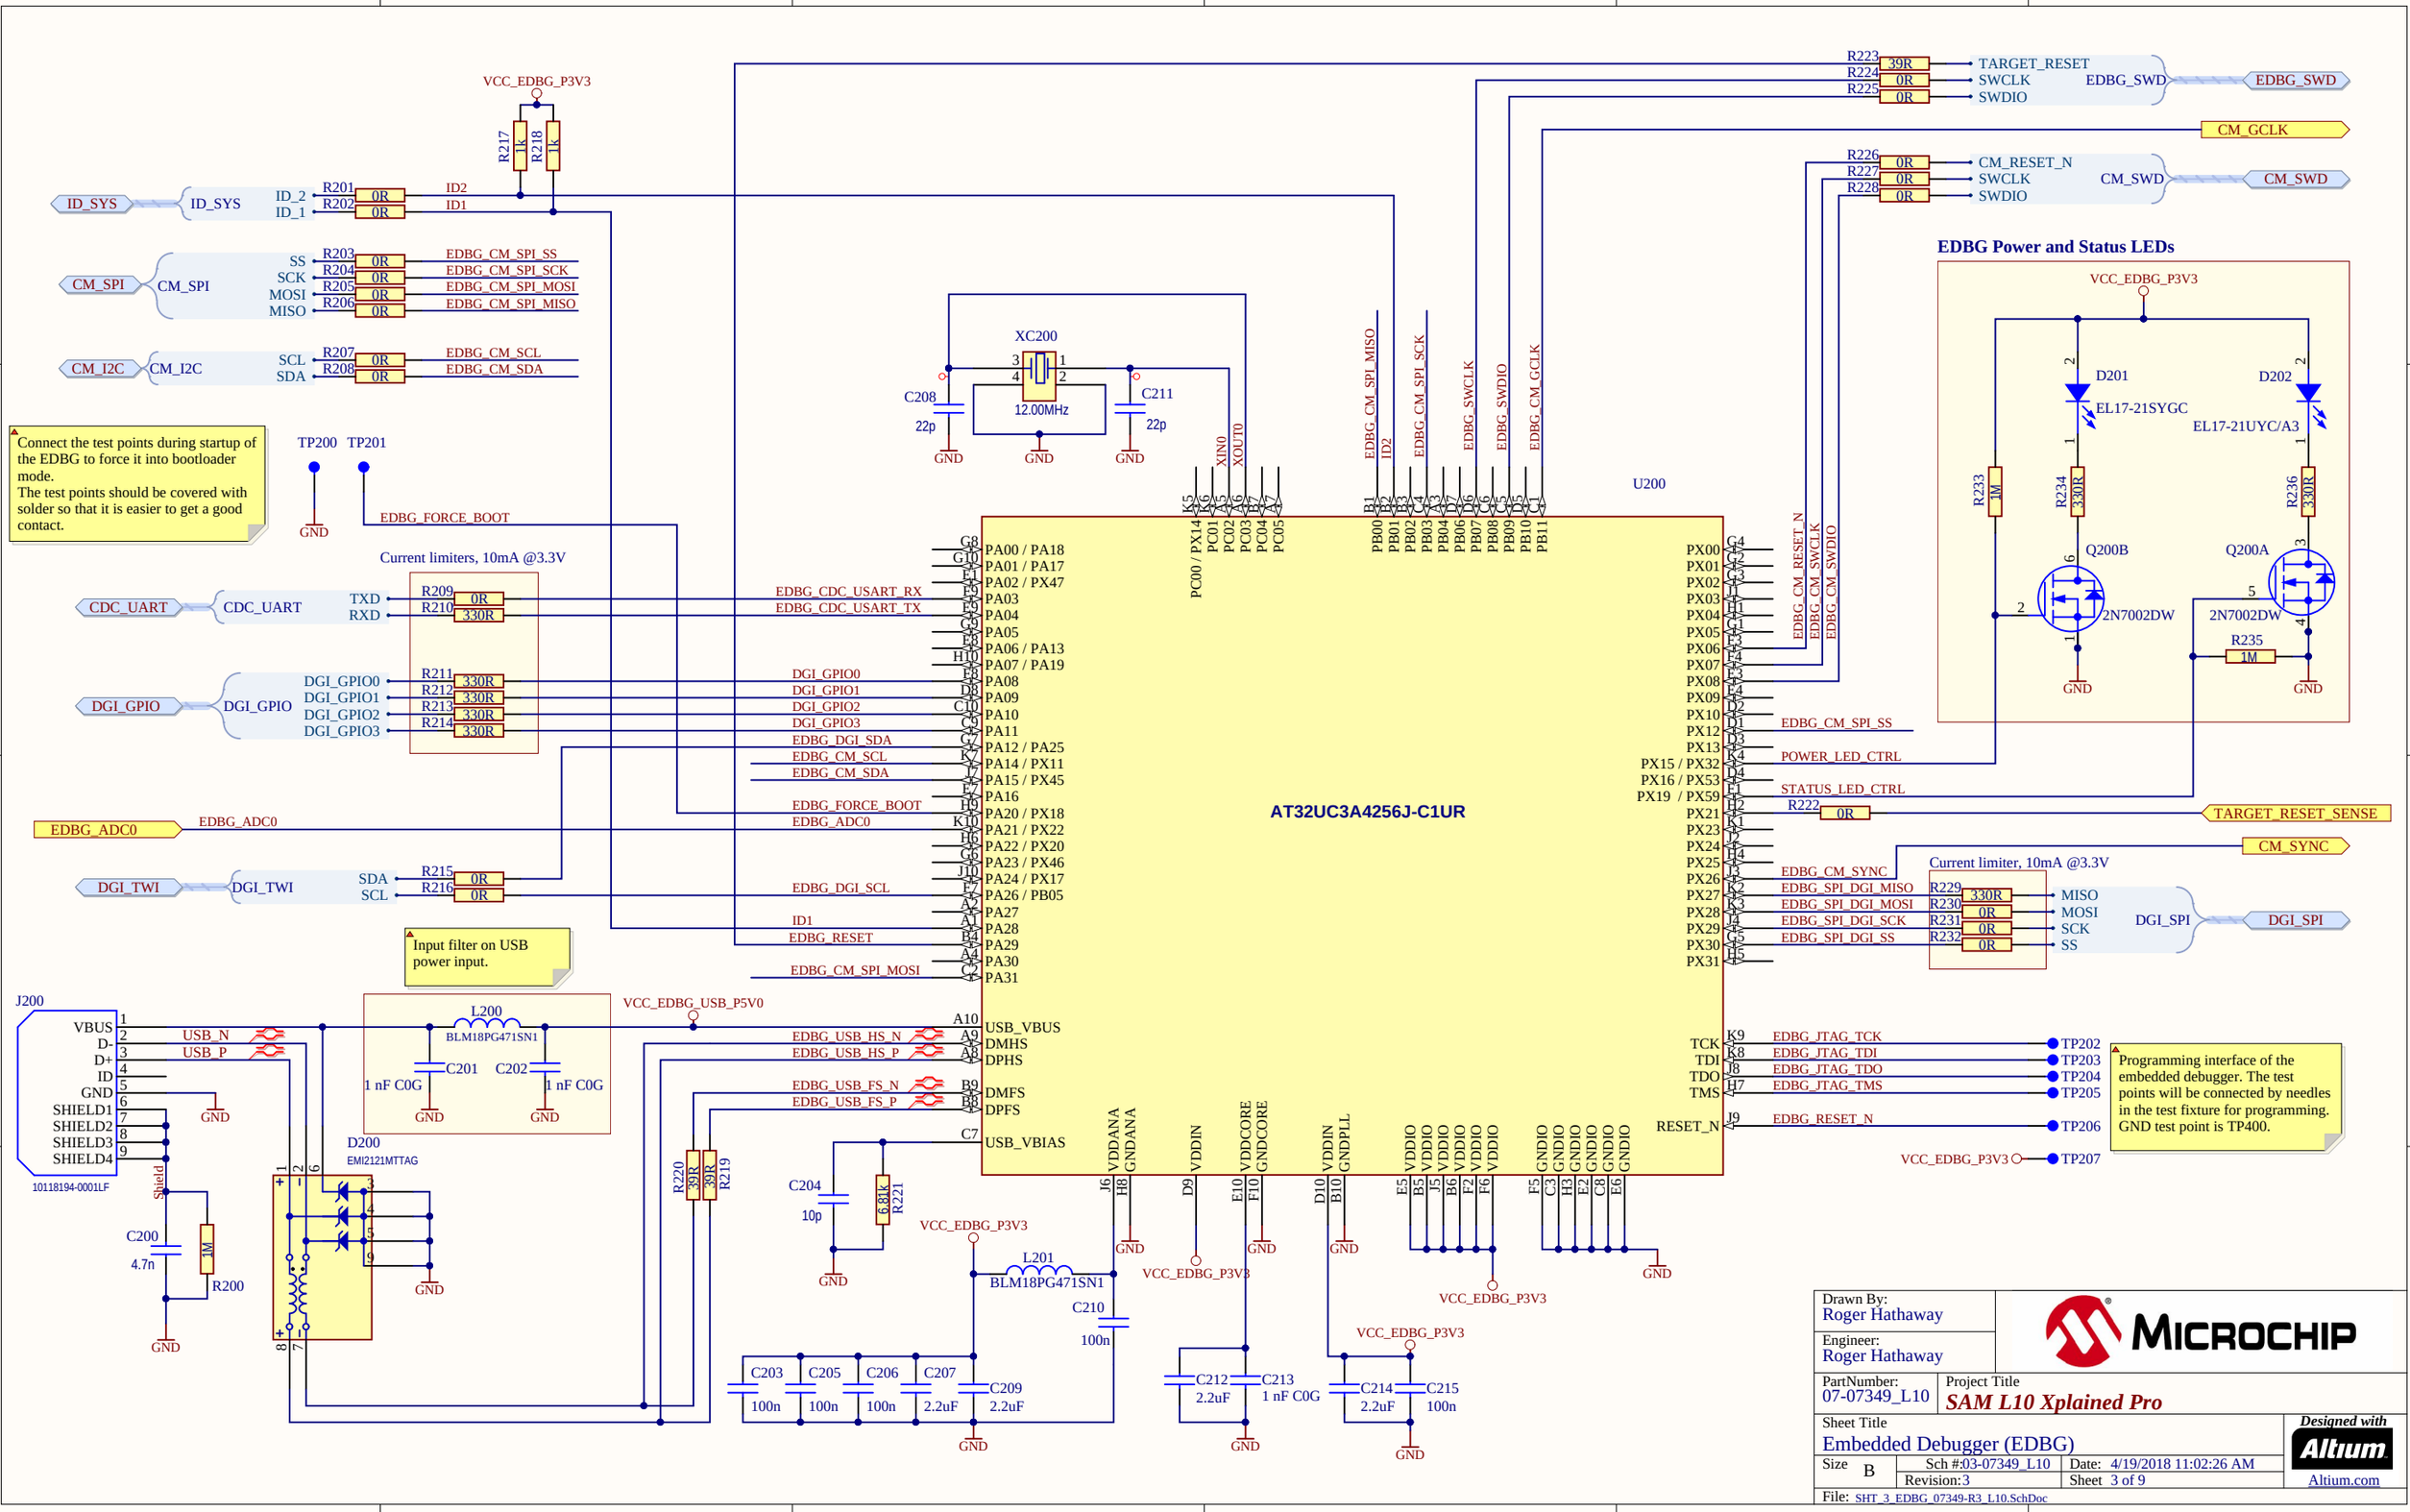
VCC_EDBG_P3V3
R217 1k
R218 1k
ID_SYS
ID_SYS
ID_2
ID_1
R201 0R
R202 0R
ID2
ID1
CM_SPI
CM_SPI
SS
SCK
MOSI
MISO
R203 0R
R204 0R
R205 0R
R206 0R
EDBG_CM_SPI_SS
EDBG_CM_SPI_SCK
EDBG_CM_SPI_MOSI
EDBG_CM_SPI_MISO
CM_I2C
CM_I2C
SCL
SDA
R207 0R
R208 0R
EDBG_CM_SCL
EDBG_CM_SDA
Connect the test points during startup of the EDBG to force it into bootloader mode.
The test points should be covered with solder so that it is easier to get a good contact.
TP200
TP201
GND
EDBG_FORCE_BOOT
Current limiters, 10mA @3.3V
CDC_UART
CDC_UART
TXD
RXD
R209 0R
R210 330R
EDBG_CDC_USART_RX
EDBG_CDC_USART_TX
DGI_GPIO
DGI_GPIO
DGI_GPIO0
DGI_GPIO1
DGI_GPIO2
DGI_GPIO3
R211 330R
R212 330R
R213 330R
R214 330R
DGI_GPIO0
DGI_GPIO1
DGI_GPIO2
DGI_GPIO3
EDBG_DGI_SDA
EDBG_CM_SCL
EDBG_CM_SDA
EDBG_FORCE_BOOT
EDBG_ADC0
EDBG_ADC0
EDBG_ADC0
DGI_TWI
DGI_TWI
SDA
SCL
R215 0R
R216 0R
EDBG_DGI_SCL
ID1
EDBG_RESET
EDBG_CM_SPI_MOSI
Input filter on USB power input.
XC200
12.00MHz
C208 22p
C211 22p
GND
XIN0
XOUT0
EDBG_CM_SPI_MISO
EDBG_CM_SPI_SCK
EDBG_SWCLK
EDBG_SWDIO
EDBG_CM_GCLK
U200
AT32UC3A4256J-C1UR
PA00 / PA18
PA01 / PA17
PA02 / PX47
PA03
PA04
PA05
PA06 / PA13
PA07 / PA19
PA08
PA09
PA10
PA11
PA12 / PA25
PA14 / PX11
PA15 / PX45
PA16
PA20 / PX18
PA21 / PX22
PA22 / PX20
PA23 / PX46
PA24 / PX17
PA26 / PB05
PA27
PA28
PA29
PA30
PA31
PC00 / PX14
PC01
PC02
PC03
PC04
PC05
PB00
PB01
PB02
PB03
PB04
PB05
PB06
PB07
PB08
PB09
PB10
PB11
PX00
PX01
PX02
PX03
PX04
PX05
PX06
PX07
PX08
PX09
PX10
PX12
PX13
PX15 / PX32
PX16 / PX53
PX19 / PX59
PX21
PX23
PX24
PX25
PX26
PX27
PX28
PX29
PX30
PX31
USB_VBUS
DMHS
DPHS
DMFS
DPFS
USB_VBIAS
TCK
TDI
TDO
TMS
RESET_N
VDDANA
GNDANA
VDDIN
VDDCORE
GNDCORE
VDDIN
GNDPLL
VDDIO
GNDIO
R223 39R
R224 0R
R225 0R
TARGET_RESET
SWCLK
SWDIO
EDBG_SWD
EDBG_SWD
CM_GCLK
R226 0R
R227 0R
R228 0R
CM_RESET_N
SWCLK
SWDIO
CM_SWD
CM_SWD
EDBG_CM_RESET_N
EDBG_CM_SWCLK
EDBG_CM_SWDIO
EDBG_CM_SPI_SS
POWER_LED_CTRL
STATUS_LED_CTRL
R222 0R
TARGET_RESET_SENSE
CM_SYNC
Current limiter, 10mA @3.3V
EDBG_CM_SYNC
EDBG_SPI_DGI_MISO
EDBG_SPI_DGI_MOSI
EDBG_SPI_DGI_SCK
EDBG_SPI_DGI_SS
R229 330R
R230 0R
R231 0R
R232 0R
MISO
MOSI
SCK
SS
DGI_SPI
DGI_SPI
EDBG Power and Status LEDs
VCC_EDBG_P3V3
D201
EL17-21SYGC
D202
EL17-21UYC/A3
R233 1M
R234 330R
R236 330R
Q200B
2N7002DW
Q200A
2N7002DW
R235 1M
GND
J200
VBUS
D-
D+
ID
GND
SHIELD1
SHIELD2
SHIELD3
SHIELD4
10118194-0001LF
USB_N
USB_P
Shield
C200 4.7n
R200 1M
L200
BLM18PG471SN1
C201 1 nF C0G
C202 1 nF C0G
D200
EMI2121MTTAG
VCC_EDBG_USB_P5V0
R220 39R
R219 39R
C204 10p
R221 6.81k
L201
BLM18PG471SN1
C210 100n
C203 100n
C205 100n
C206 100n
C207 2.2uF
C209 2.2uF
C212 2.2uF
C213 1 nF C0G
C214 2.2uF
C215 100n
Programming interface of the embedded debugger. The test points will be connected by needles in the test fixture for programming. GND test point is TP400.
TP202
TP203
TP204
TP205
TP206
TP207
Drawn By: Roger Hathaway
Engineer: Roger Hathaway
PartNumber: 07-07349_L10
Project Title: SAM L10 Xplained Pro
Sheet Title: Embedded Debugger (EDBG)
Size B
Sch #:03-07349_L10
Revision:3
Date: 4/19/2018 11:02:26 AM
Sheet 3 of 9
File: SHT_3_EDBG_07349-R3_L10.SchDoc
Designed with Altium
Altium.com

EDBG_SWD
TARGET_RESET
EDBG_SWD
SWCLK
SWDIO
TARGET_MCU_RESET
SWCLK
SWDIO

DGI_GPIO
DGI_GPIO
DGI_GPIO0
DGI_GPIO1
DGI_GPIO2
DGI_GPIO3
PA10_GPIO1_S2_USART_RTS
PA11_GPIO2_S2_USART_CTS
PA23_GPIO_SS
PA27_GPIO_SS

DGI_TWI
DGI_TWI
SDA
SCL
PA16_S1_I2C_SDA
PA17_S1_I2C_SCL

CDC_UART
CDC_UART
RXD
TXD
PA25_UART_RX
PA24_UART_TX

DGI_SPI
DGI_SPI
SS
MOSI
MISO
SCK
PA07_LED_PWM_TC0
PA14_S0_SPI_MOSI
PA04_S0_SPI_MISO
PA15_S0_SPI_SCK

TARGET_MCU_RESET
TARGET_MCU_RESET

Option
VCC_TARGET_P3V3
R331
R332
DNP
DNP

Close to VDDCORE
C308
C309
100n
1u
GND
J300
JS300
SNT-100-BK-G
1125-1102S0S113R1

I2C PULL-UP
VCC_TARGET_P3V3
R329
4.7k
4.7k
R330
PA16_S1_I2C_SDA
PA17_S1_I2C_SCL

Close to VDDIO/GND pair
VCC_MCU_P3V3
L302
BLM18PG471SN1
VDDIO
C304
100n
C306
10uF/16V
GND GND

L301
10uH
GND
VDDCORE
TARGET_MCU_RESET
PA27_GPIO_SS
SWDIO
SWCLK

U301
ATSAML10E16A-AU

32	PA31 / SWDIO		
31	PA30 / SWCLK		
30	VDDIO		
29	VDDOUT		
28	GND		
27	VDDCORE		
26	RESET		
25	PA27		
XIN32	R302 0R PA00	1	PA00 / XIN32
XOUT32	R303 0R PA01	2	PA01/ XOUT32
PA02_ADC0		3	PA02
PA03_ADC1_VREF		4	PA03
PA04_S0_SPI_MISO		5	PA04
PA05_S0_SPI_SS		6	PA05
PA06_SPI_SS		7	PA06
PA07_LED_PWM_TC0		8	PA07
9	VDDANA		
10	GND		
11	PA08		
12	PA09		
13	PA10		
14	PA11		
PA14	PA14 / XIN		
PA15	PA15 / XOUT		
		24	PA25 PA25_UART_RX
		23	PA24 PA24_UART_TX
		22	I2C / PA23 PA23_GPIO_SS
		21	I2C / PA22 PA22_GPIO_IRQ_1
		20	PA19 PA19_PWM_TC2_1
		19	PA18 PA18_PWM_TC2_0
		18	I2C / PA17 PA17_S1_I2C_SCL
		17	I2C / PA16 PA16_S1_I2C_SDA

PA08_S2_UART_TX
PA09_S2_UART_RX
PA10_GPIO1_S2_USART_RTS
PA11_GPIO2_S2_USART_CTS
PA14_S0_SPI_MOSI
PA15_S0_SPI_SCK
R304 0R
R305 0R

Close to VDDANA/GNDANA
VCC_MCU_P3V3
L300
BLM18PG471SN1
VCC_MCU_VDDANA
C305
4.7uF
C307
100n
GND

SWDIO
SWCLK
TARGET_MCU_RESET
SWDIO
SWCLK
TARGET_RESET
SWD
SWD_CONNECTOR

PA02_ADC0
PA03_ADC1_VREF
PA10_GPIO1_S2_USART_RTS
PA11_GPIO2_S2_USART_CTS
PA18_PWM_TC2_0
PA19_PWM_TC2_1
PA22_GPIO_IRQ_1
PA23_GPIO_SS
PA16_S1_I2C_SDA
PA17_S1_I2C_SCL
PA09_S2_UART_RX
PA08_S2_UART_TX
PA05_S0_SPI_SS
PA14_S0_SPI_MOSI
PA04_S0_SPI_MISO
PA15_S0_SPI_SCK
PIN3_ADC(+)
PIN4_ADC(-)
PIN5_GPIO
PIN6_GPIO
PIN7_PWM(+)
PIN8_PWM(-)
PIN9_IRQ/GPIO
PIN10_SPI_SS_B/GPIO
PIN11_TWI_SDA
PIN12_TWI_SCL
PIN13_UART_RX
PIN14_UART_TX
PIN15_SPI_SS_A
PIN16_SPI_MOSI
PIN17_SPI_MISO
PIN18_SPI_SCK
EXT
EXT1

PA27_GPIO_SS
PA16_S1_I2C_SDA
PA17_S1_I2C_SCL
PA25_UART_RX
PA24_UART_TX
PA06_SPI_SS
PA14_S0_SPI_MOSI
PA04_S0_SPI_MISO
PA15_S0_SPI_SCK
EXT
EXT2

PA02_ADC0
TARGET_MCU_RESET
PA05_S0_SPI_SS
PA15_S0_SPI_SCK
PA04_S0_SPI_MISO
PA14_S0_SPI_MOSI
PA16_S1_I2C_SDA
PA17_S1_I2C_SCL
PA08_S2_UART_TX
PA09_S2_UART_RX
PA22_GPIO_IRQ_1
PA18_PWM_TC2_0
PIN1_ADC(+)
PIN2_RESET_B
PIN3_SPI_SS_A
PIN4_SPI_SCK
PIN5_SPI_MISO
PIN6_SPI_MOSI
PIN11_TWI_SDA
PIN12_TWI_SCL
PIN13_UART_TX
PIN14_UART_RX
PIN15_IRQ/GPIO
PIN16_PWM(+)
mikroBUS
mikroBUS

PA09_S2_UART_RX
PA11_GPIO2_S2_USART_CTS
PA08_S2_UART_TX
PA10_GPIO1_S2_USART_RTS
PA17_S1_I2C_SCL
TARGET_MCU_RESET
PA16_S1_I2C_SDA
PA05_S0_SPI_SS
PA14_S0_SPI_MOSI
PA15_S0_SPI_SCK
PA04_S0_SPI_MISO
PA22_GPIO_IRQ_1
PA02_ADC0
PIN3_USART_RX
PIN4_USART_CTS
PIN5_USART_TX
PIN6_USART_RTS
PIN7_I2C_SCL
PIN8_STBY/RST_B
PIN9_I2C_SDA
PIN10_DMM/I2S_WS
PIN11_I2S_DIN
PIN12_I2S_CK
PIN13_I2S_DOUT
PIN14A_CLK_AUDIO
PIN14B_I2S_MCK
PIN2_ANALOG_POT
X32BUS
X32BUS

TARGET_MCU_RESET
PA07_LED_PWM_TC0
PA27_GPIO_SS
PA06_SPI_SS
TARGET_MCU_RESET
USER_LED
USER_BUTTON
USER_QTOUCH
USER_BUS
USER_BUS

32 kHz CRYSTAL

Crystal datasheet:
Ccrystal = 9pF
max ESR (limit) = 70kOhm
Accuracy ±20ppm

Datasheet:
Cpara = 2.5pF (Typical)
max ESR =70 kOhm

PCB capacitance: Cpcb = 0.5pF (estimated)

Estimated load:
C = 2x(Ccrystal- Cpara - Cpcb)
C = 2x(9pF - 2.15pF(estimated) - 0.5pF)
C = 12.7pF

Selected in design: C= 13pF
Verification showed: 13pF
Accuracy: less than ±11.8ppm
Startup time: 172ms to reach output
with a 9.5pF probe connected to the crystal.
Safety factor: Above 6

XIN32
XOUT32
XC300
R300
0R
32.768kHz
C300
13pF
C301
13pF
GND

Ext 12 MHz CRYSTAL

An external crystal and load capacitors can be soldered to these footprints.

Select a crystal and capacitors for your application based on information from the SAM L11 datasheet.


PA14
PA15
DNP
XC301
DNP
R333
12.00MHz
GND
DNP
DNP
GND
GND

CryptoAuthentication Device

VCC_TARGET_P3V3
U300
PA16_S1_I2C_SDA
PA17_S1_I2C_SCL
R313 0R
R314 0R
1 NC
2 NC
3 NC
4 SDA
5 SCL
6 NC
VCC 8
PAD 9
GND 4
C310
100n
GND
ATECC508A I2C UDFN


Drawn By:	Roger Hathaway	
Engineer:	Roger Hathaway	
PartNumber:	07-07349_L10	Project Title: SAM L10 Xplained Pro
Sheet Title	Target MCU	
Size	B	Sch #:03-07349_L10 Date: 4/19/2018 11:02:26 AM
		Revision:3 Sheet 4 of 9
File:	SHT_4_MCU_07349-R3_L10.SchDoc	


Designed with Altium
Altium.com

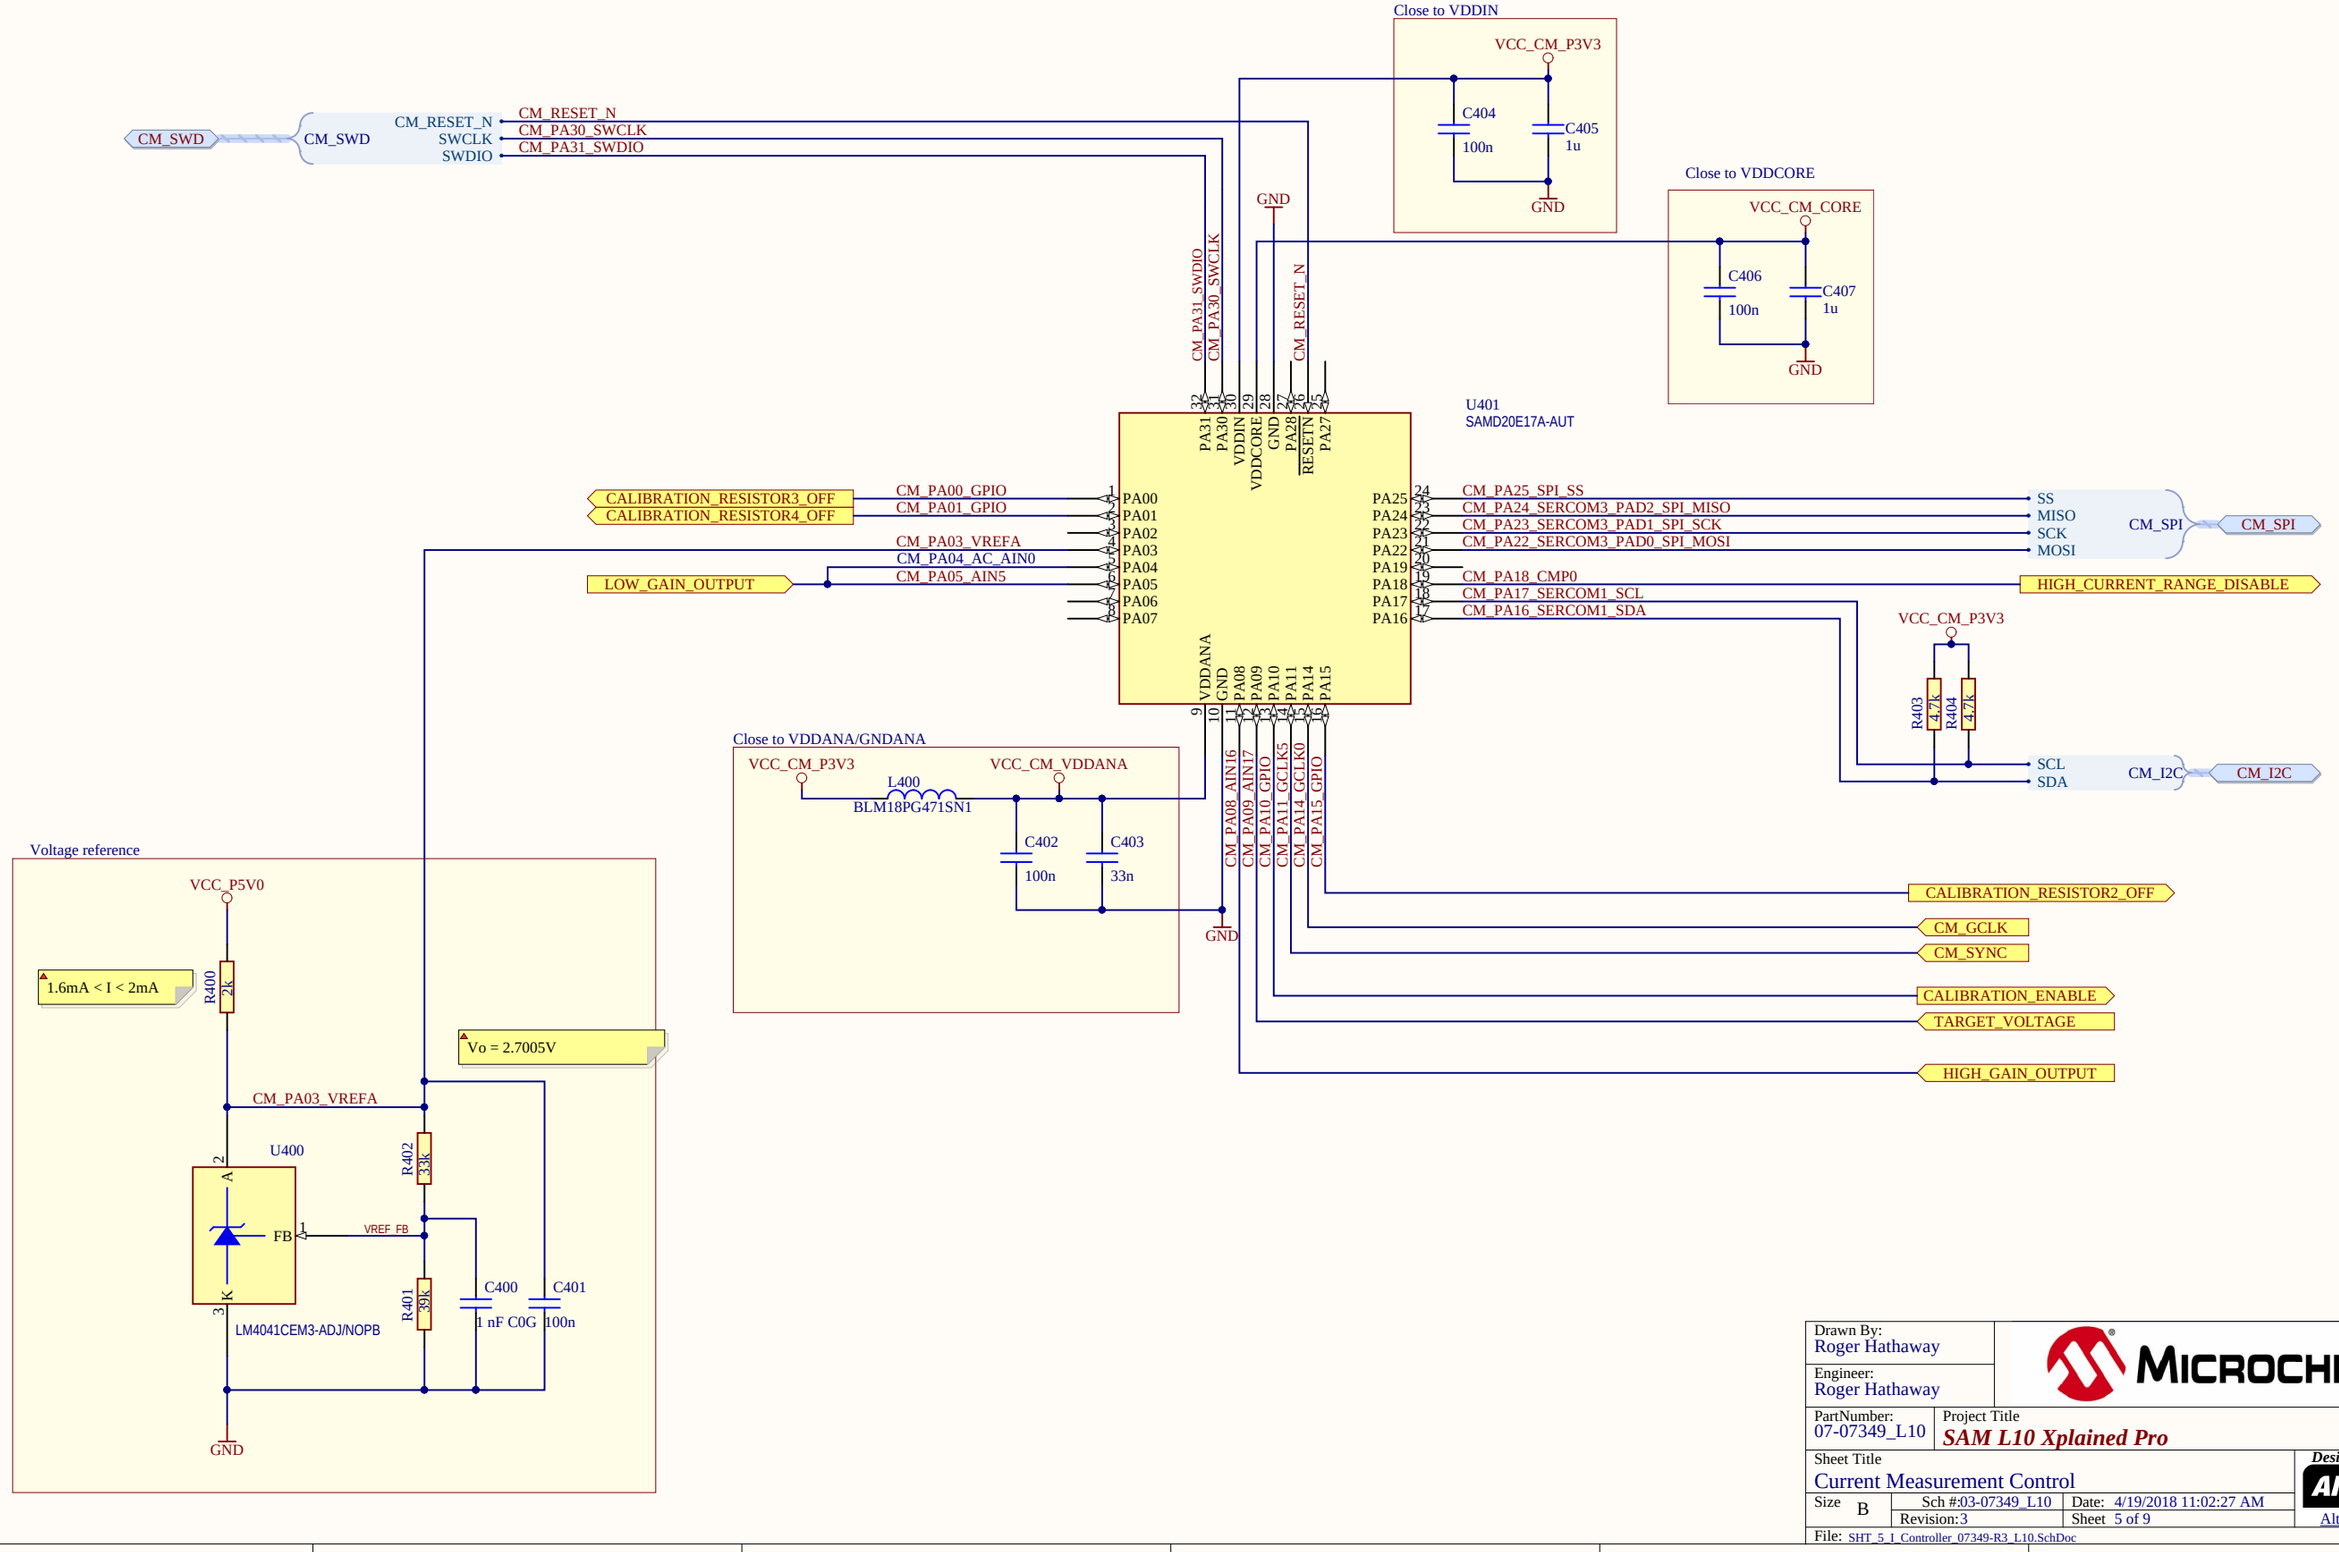


Drawn By: Roger Hathaway	MICROCHIP
Engineer: Roger Hathaway	
PartNumber: 07-07349_L10	Project Title: *SAM L10 Xplained Pro*
Sheet Title: Current Measurement Control	Designed with Altium — Altium.com
Size: B	Sch #:03-07349_L10 · Revision:3 · Date: 4/19/2018 11:02:27 AM · Sheet 5 of 9
File: SHT_5_1_Controller_07349-R3_L10.SchDoc	

Target disconnect for calibration

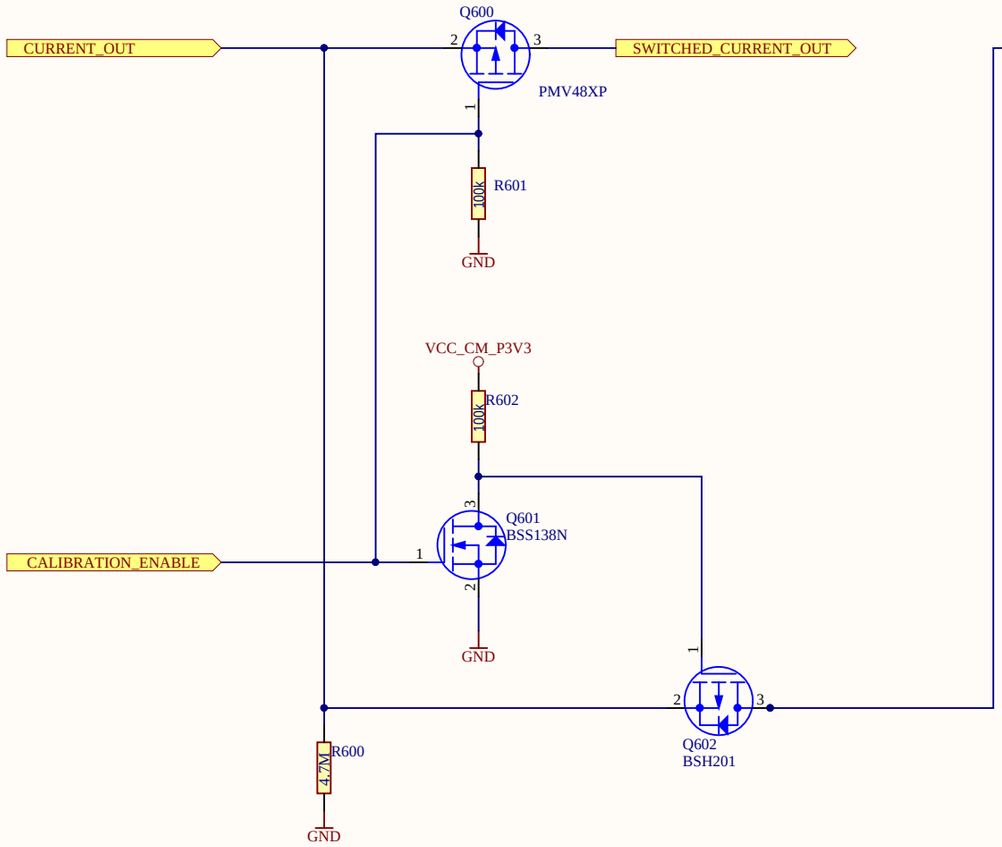


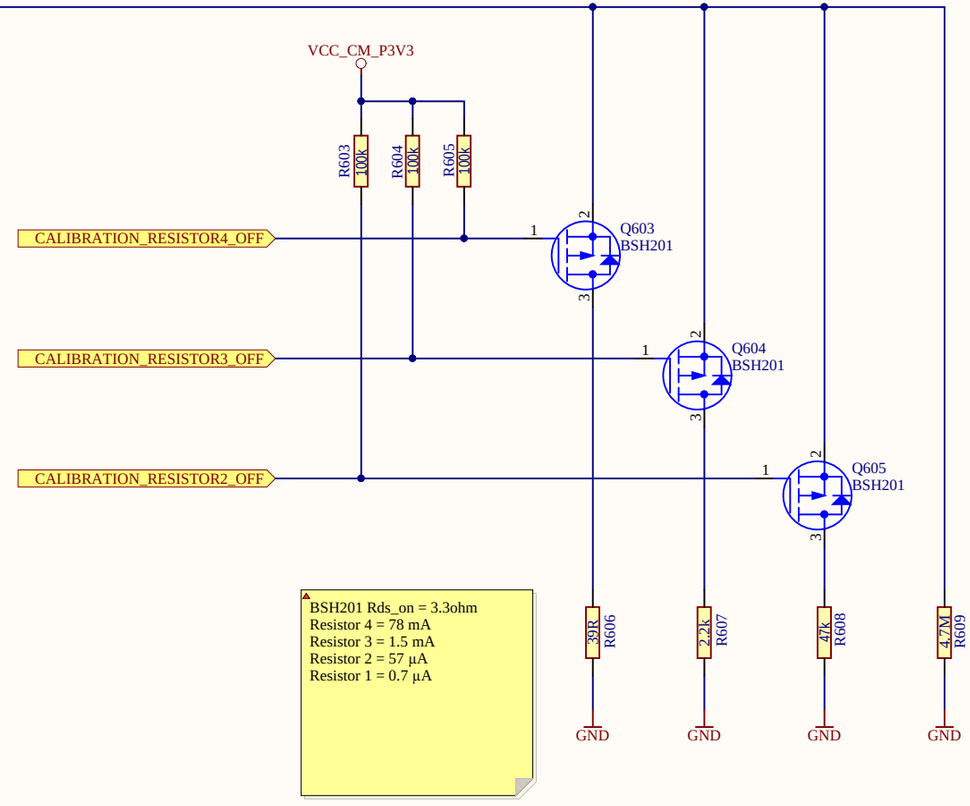


Drawn By: Roger Hathaway	MICROCHIP
Engineer: Roger Hathaway	
PartNumber: 07-07349_L10	Project Title: *SAM L10 Xplained Pro*
Sheet Title: Current Measurement Calibration	Designed with Altium — Altium.com
Size: B	Sch #:03-07349_L10 — Date: 4/19/2018 11:02:27 AM
	Revision:3 — Sheet 6 of 9
File: SHT_7_I_Calibration_07349-R3_L10.SchDoc	

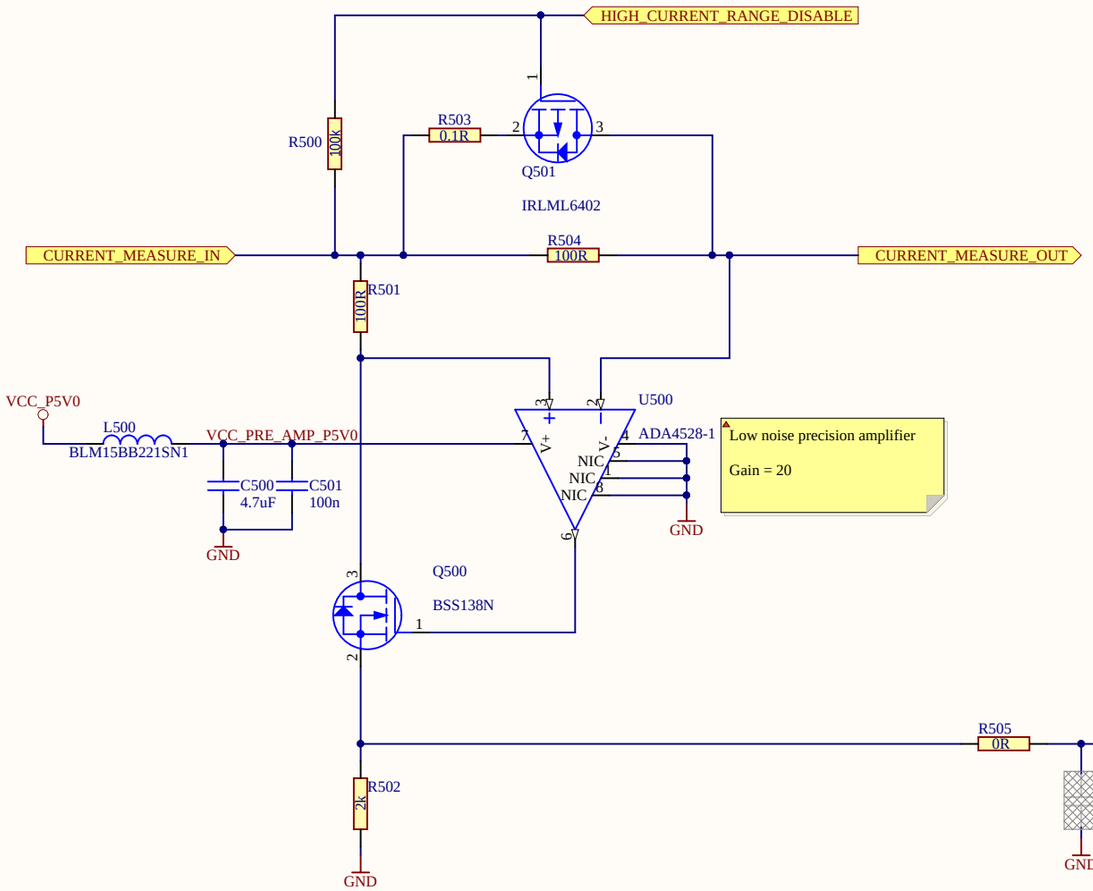


Active low pass filter with gain

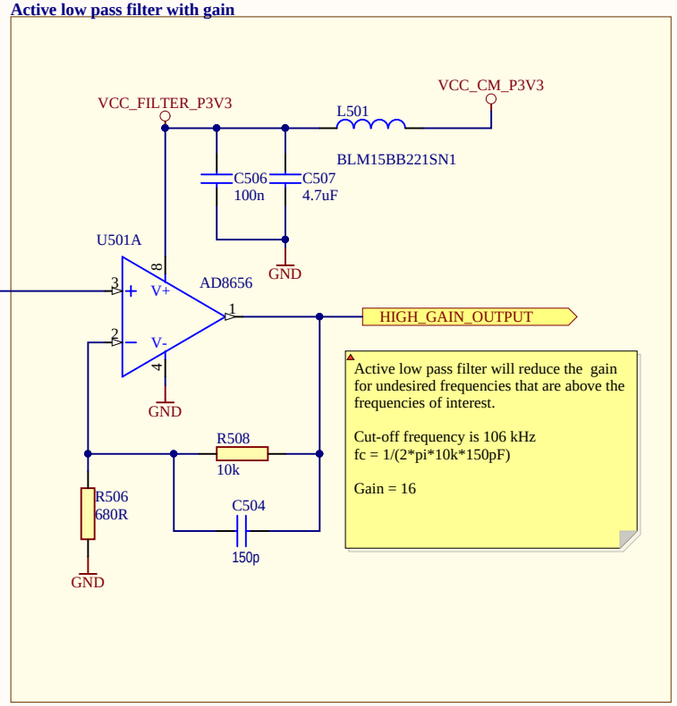


Active low pass filter with gain

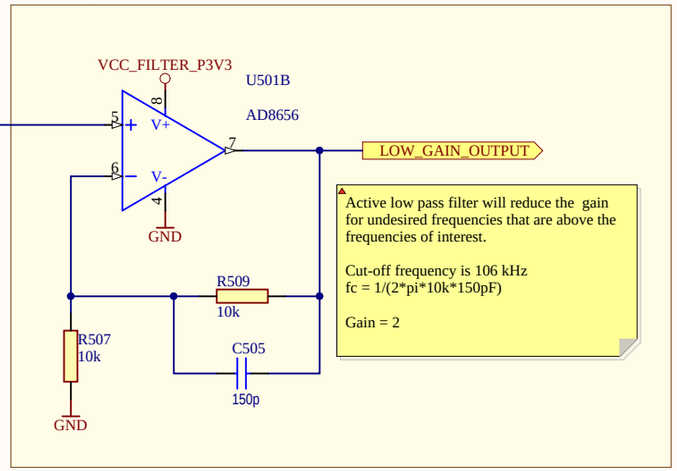


Drawn By: Roger Hathaway	MICROCHIP
Engineer: Roger Hathaway	
PartNumber: 07-07349_L10	Project Title: *SAM L10 Xplained Pro*
Sheet Title: Current Measurement Front End	Designed with Altium (Altium.com)
Size: B	Sch #:03-07349_L10 · Date: 4/19/2018 11:02:28 AM
	Revision: 3 · Sheet 7 of 9
File: SHT_6_I_Measure_07349-R3_L10.SchDoc	

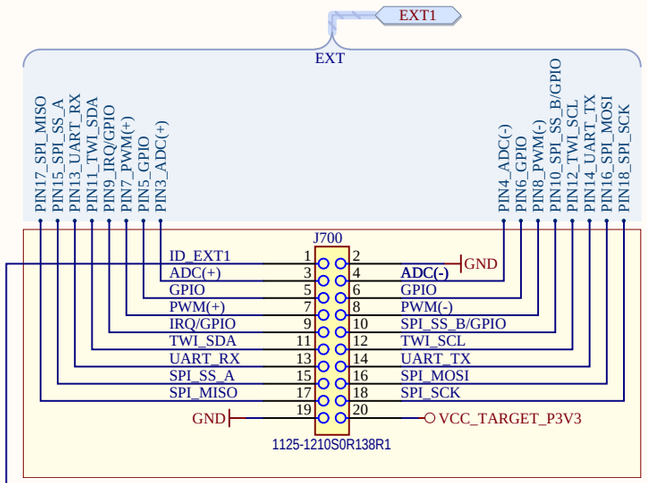


EXT1 extension header




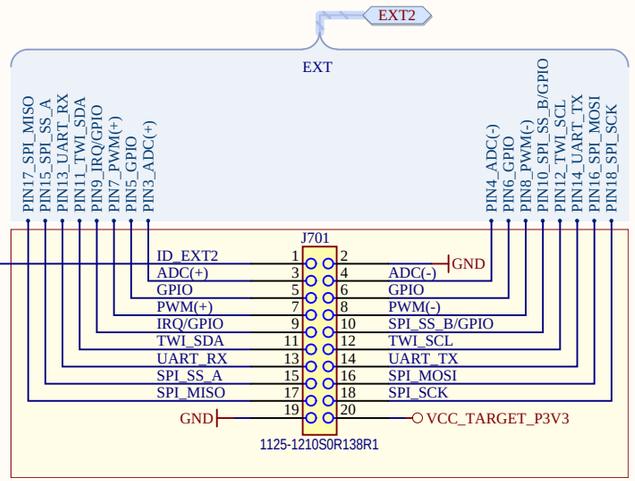


EXT2 extension header

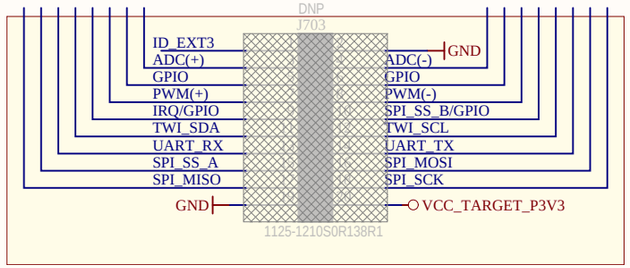



EXT3 extension header

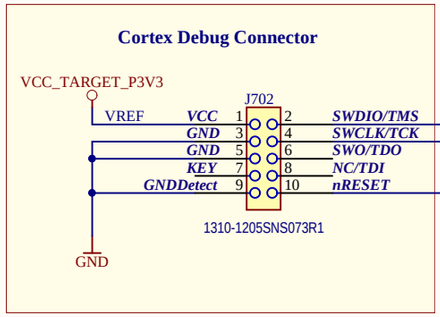




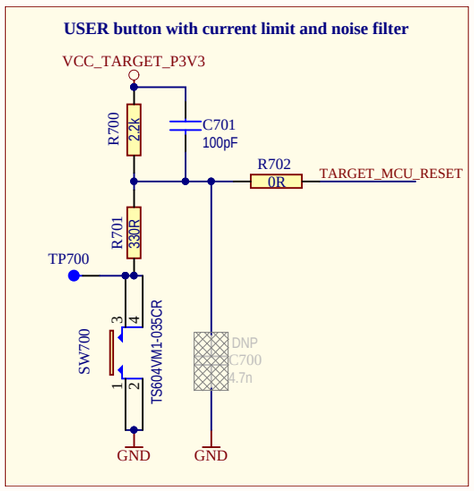


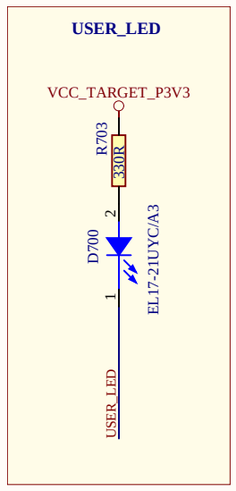


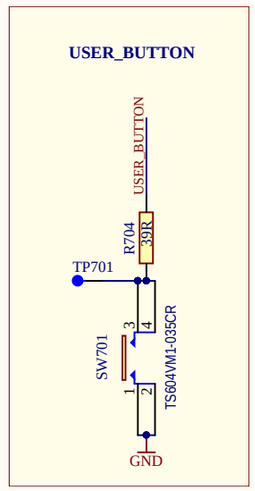


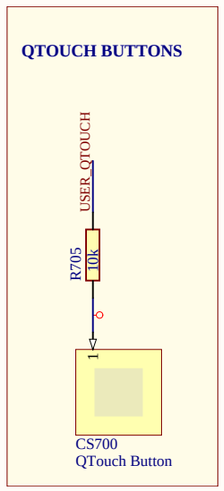

Drawn By: Roger Hathaway	MICROCHIP
Engineer: Roger Hathaway	
PartNumber: 07-07349_L10	Project Title: *SAM L10 Xplained Pro*
Sheet Title: Extension Connectors	Designed with Altium — Altium.com
Size: B	Sch #:03-07349_L10 · Revision:3 · Date: 4/19/2018 11:02:28 AM · Sheet 8 of 9
File: SHT_8_Ext_Headers_07349-R3_L10.SchDoc	

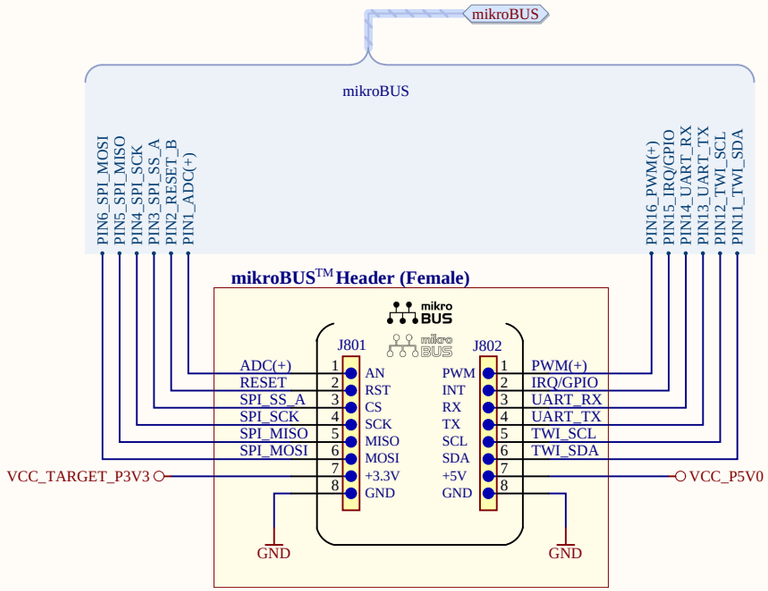

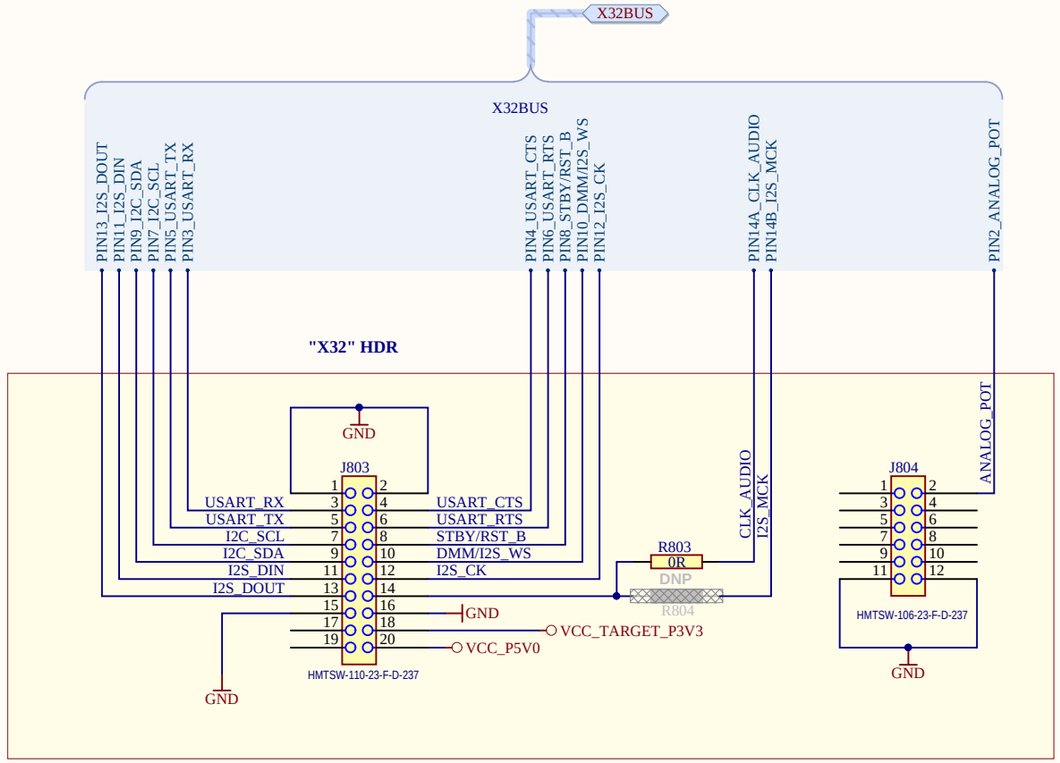


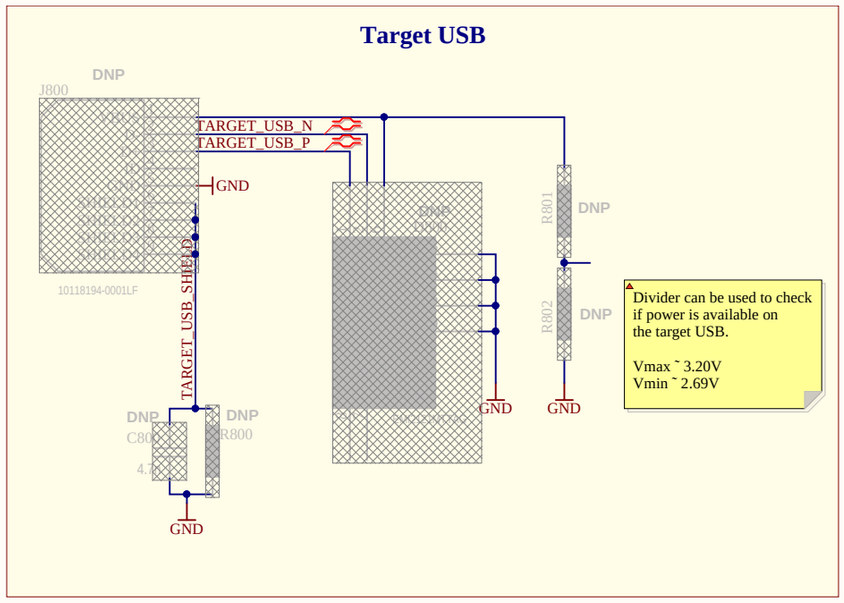


Drawn By: Roger Hathaway	MICROCHIP
Engineer: Roger Hathaway	
PartNumber: 07-07349_L10	Project Title: *SAM L10 Xplained Pro*
Sheet Title: X32 and mikroBUS Connectors	Designed with Altium
Size: B	Sch #:03-07349_L10 · Date: 4/19/2018 11:02:29 AM
	Revision:3 · Sheet 9 of 9
File: SHT_9_X32-mikroBUS_07349-R3_L10.SchDoc	Altium.com

Medium MCU Mechanical Dimensions


Medium MCU Connector Placement

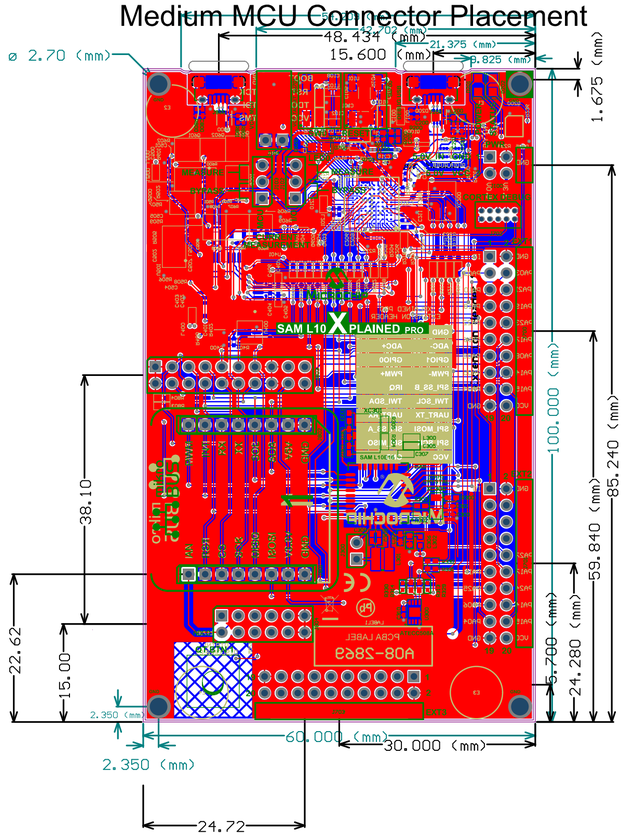



ATMEL NORWAY Vestre Rosten 79 N-7075 Tiller	ENGINEER: PCB DESIGNER:	TITLE:
	DATE: 4/19/2018	PART NO.: REV:
	FILE NAME: 04-07349-R3_L10.PcbDoc	DWG NO: SCALE:

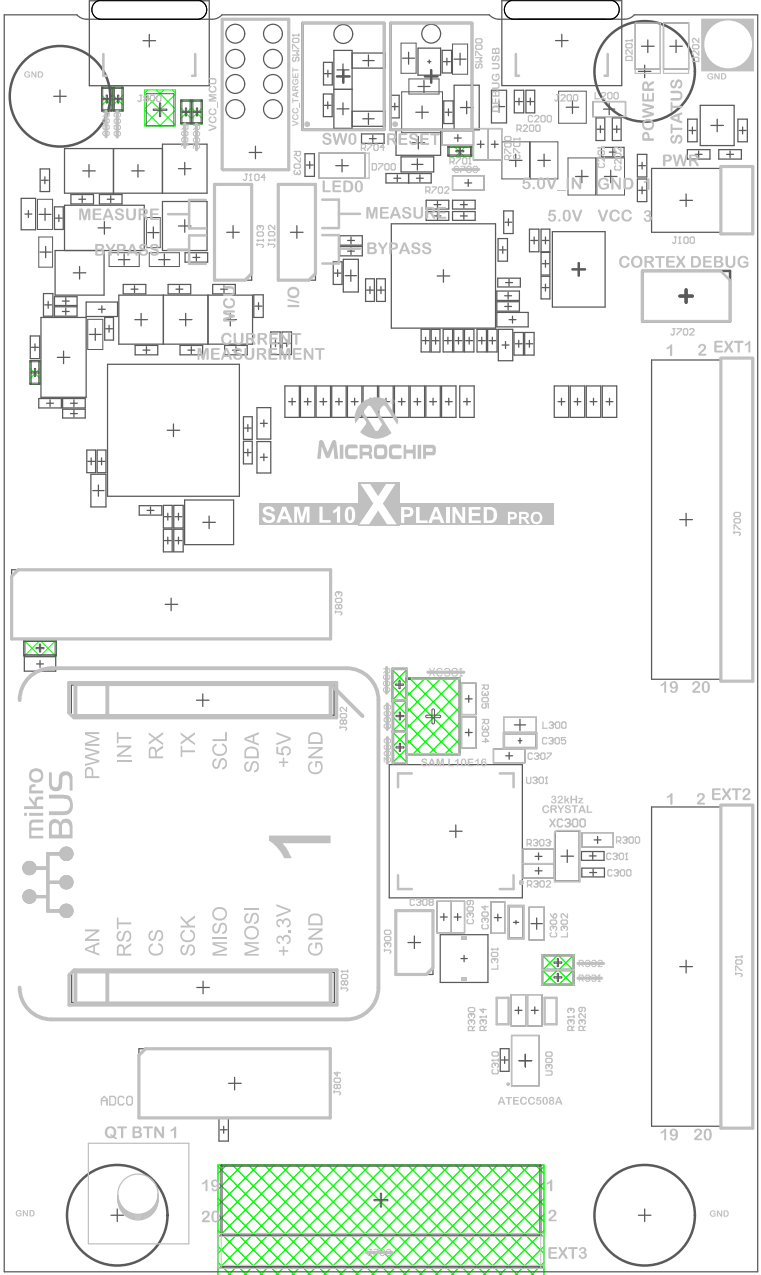

GND
VCC_MCU
VCC_TARGET SMJ701
SW700
SW0
RESET
LED0
D700
R702
MEASURE
BYPASS
I/O
MCU
CURRENT MEASUREMENT
MICROCHIP
SAM L10 XPLAINED PRO
POWER
STATUS
PWR
5.0V
VCC
3
CORTEX DEBUG
J702
EXT1
J700
J603
J802
PWM
INT
RX
TX
SCL
SDA
+5V
GND
mikro BUS
AN
RST
CS
SCK
MISO
MOSI
+3.3V
J801
U301
32kHz CRYSTAL
XC300
L300
C305
C307
R303
R300
C301
C300
R302
C308
C304
C306
C302
L301
J300
R330
R314
R313
R329
C310
U300
ATECC508A
EXT2
J701
ADC0
J804
QT BTN 1
EXT3
J800


BOOT
RST
TDO
VCC
GND
TCK
TDI
TMS
XPLAINED PRO
EXTENSION HEADER
GND ID
ADC- ADC+
GPIO1 GPIO0
PWM- PWM+
SPI_SS_B IRQ
TWI_SCL TWI_SDA
UART_TX UART_RX
SPI_MOSI SPI_SS_A
SPI_SCK SPI_MISO
VCC GND
mikro BUS
PWM
INT
RX
TX
SCL
SDA
+5V
GND
AN
RST
CS
SCK
MISO
MOSI
+3.3V
GND
MICROCHIP
PCBA LABEL
A08-2869
QTBTN1
DISCONNECT

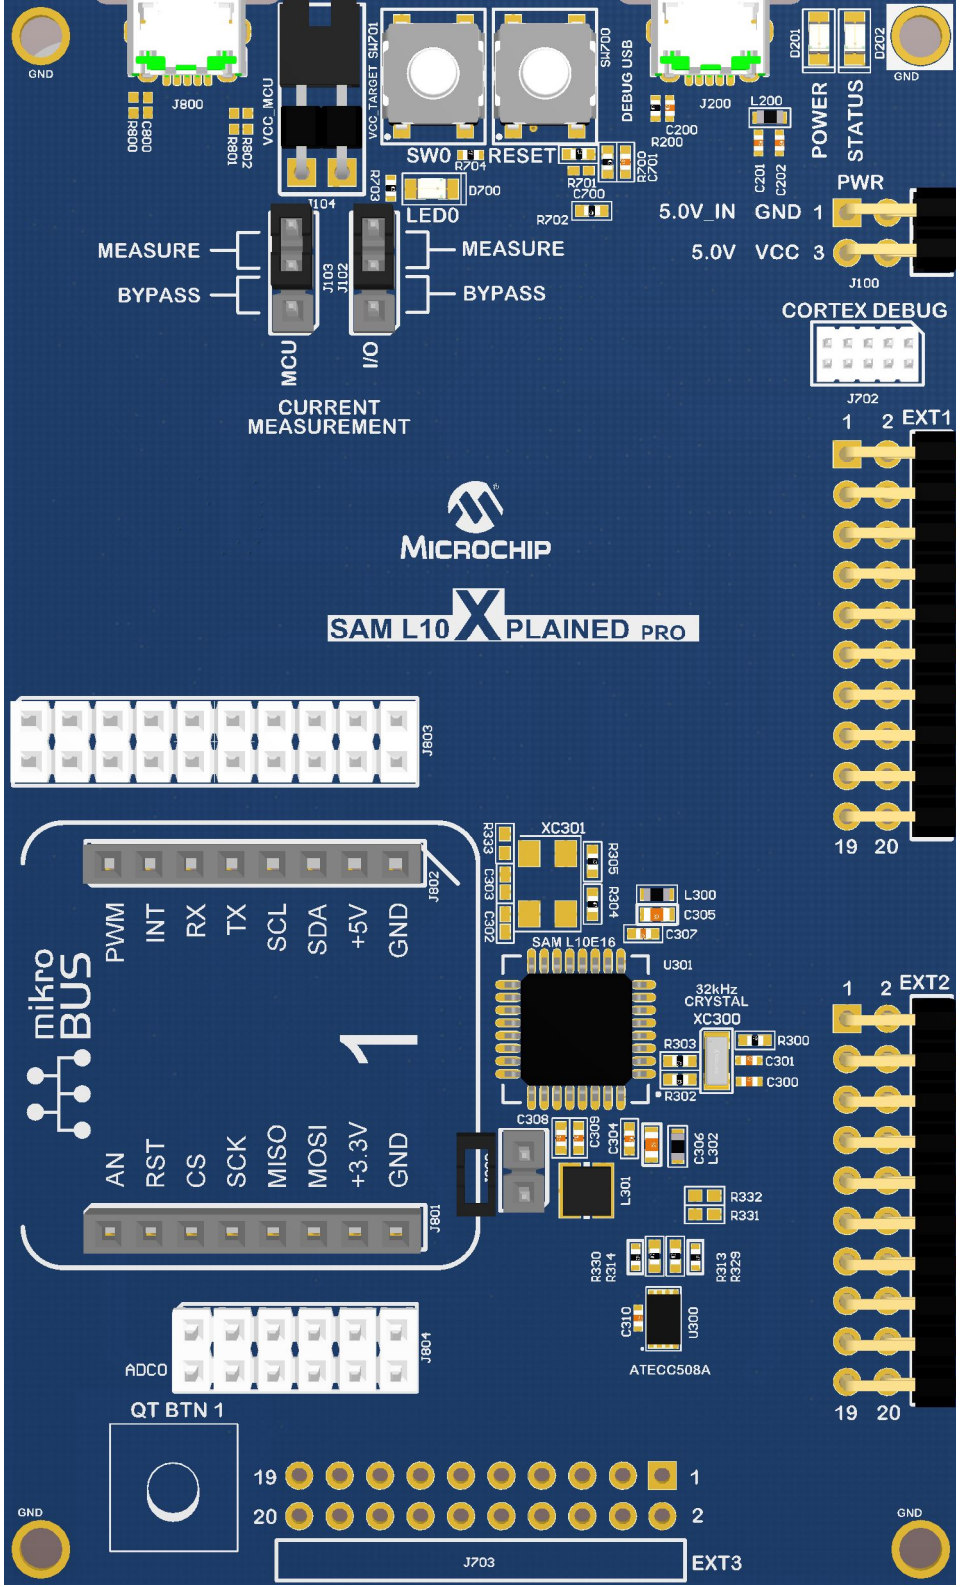

GND
J800
C800
R800
R801
R802
VCC_MCU
J104
VCC_TARGET SW701
SW700
DEBUG USB
J200
C200
R200
L200
C201
C202
D201
D202
POWER
STATUS
GND
SW0
RESET
R704
R703
D700
LED0
R700
R701
C701
C700
R702
PWR
5.0V_IN GND 1
5.0V VCC 3
J100
MEASURE
BYPASS
J103
J102
MEASURE
BYPASS
MCU
I/O
CURRENT MEASUREMENT
CORTEX DEBUG
J702
1 2 EXT1
19 20
MICROCHIP
SAM L10 XPLAINED PRO
J603
XC301
R333
C303
C302
R305
R304
L300
C305
C307
SAM L10E16
U301
32kHz CRYSTAL
XC300
R303
R302
R300
C301
C300
C308
C309
C304
C306
L302
L301
R332
R331
R330
R314
R313
R329
C310
U300
ATECC508A
J802
PWM
INT
RX
TX
SCL
SDA
+5V
GND
mikro BUS
1
AN
RST
CS
SCK
MISO
MOSI
+3.3V
GND
J801
J804
ADC0
QT BTN 1
1 2 EXT2
19 20
19
20
1
2
J703
EXT3
GND
GND

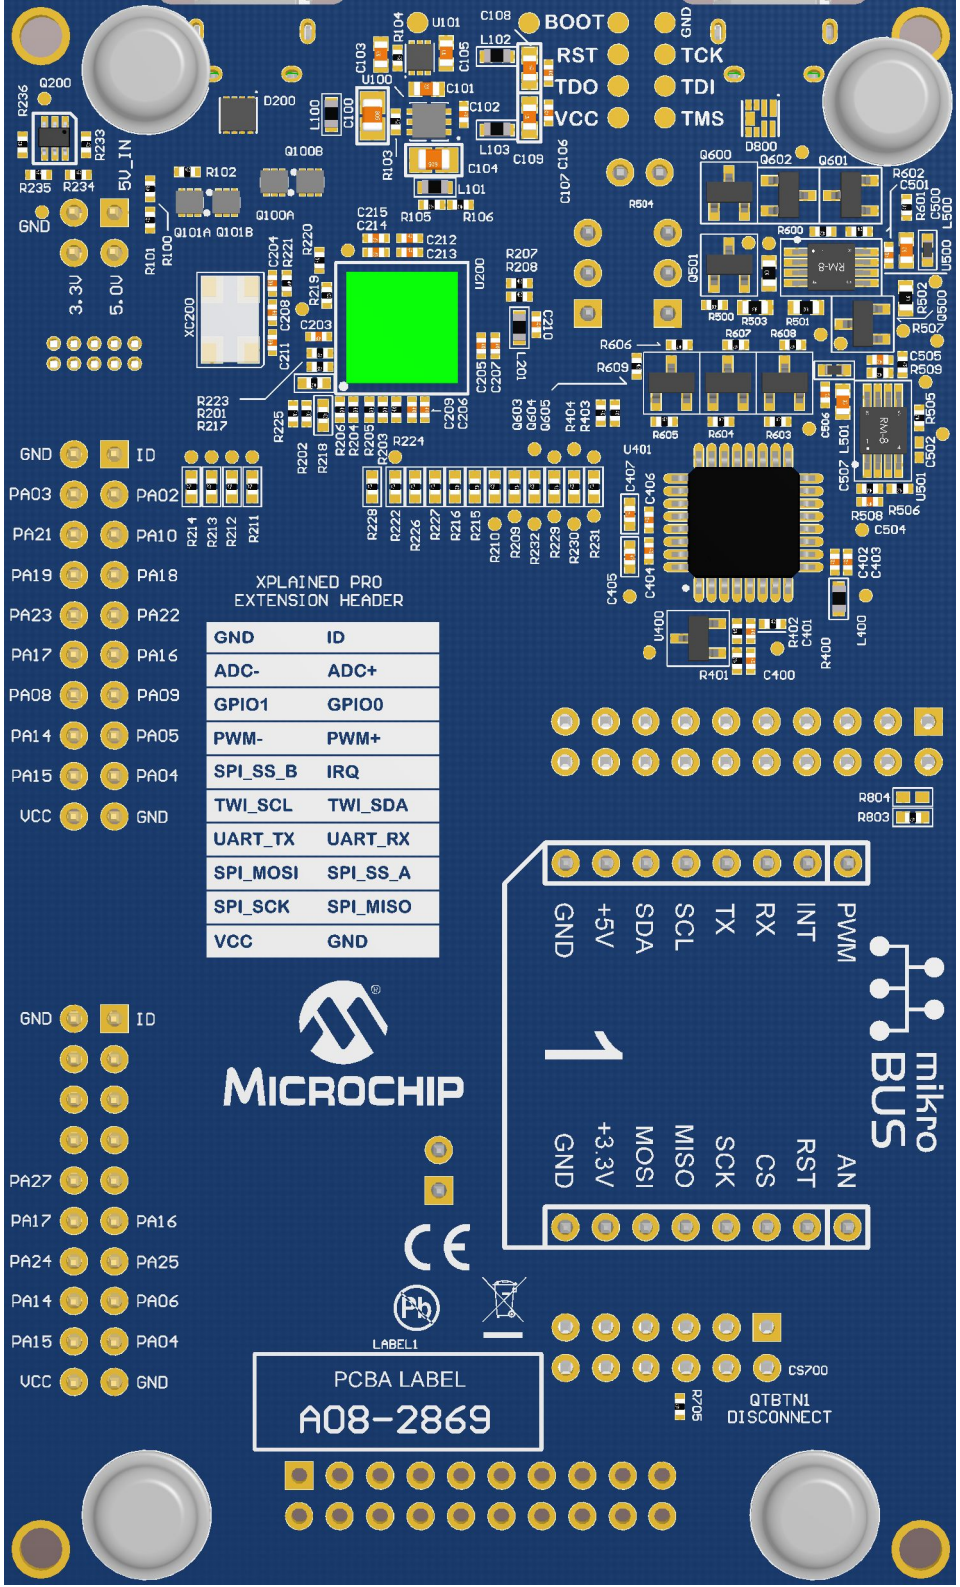
BOOT
RST
TDO
VCC
GND
TCK
TDI
TMS
5V_IN
3.3V
5.0V
GND
ID
PA03
PA02
PA21
PA10
PA19
PA18
PA23
PA22
PA17
PA16
PA08
PA09
PA14
PA05
PA15
PA04
VCC
GND
XPLAINED PRO
EXTENSION HEADER
GND ID
ADC- ADC+
GPIO1 GPIO0
PWM- PWM+
SPI_SS_B IRQ
TWI_SCL TWI_SDA
UART_TX UART_RX
SPI_MOSI SPI_SS_A
SPI_SCK SPI_MISO
VCC GND
MICROCHIP
PA27
PA17
PA16
PA24
PA25
PA14
PA06
PA15
PA04
VCC
GND
PWM
INT
RX
TX
SCL
SDA
+5V
GND
AN
RST
CS
SCK
MISO
MOSI
+3.3V
GND
mikro BUS
LABEL1
PCBA LABEL
A08-2869
CS700
QTBTN1
DISCONNECT

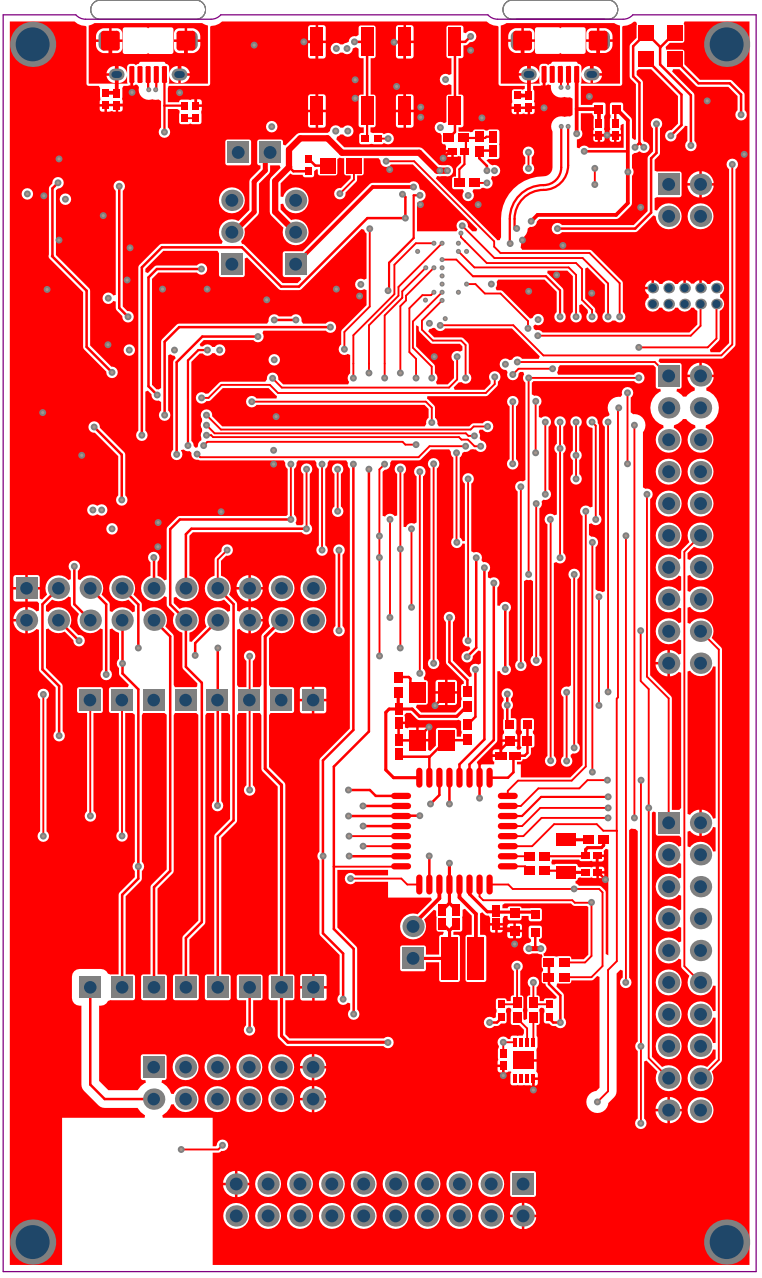

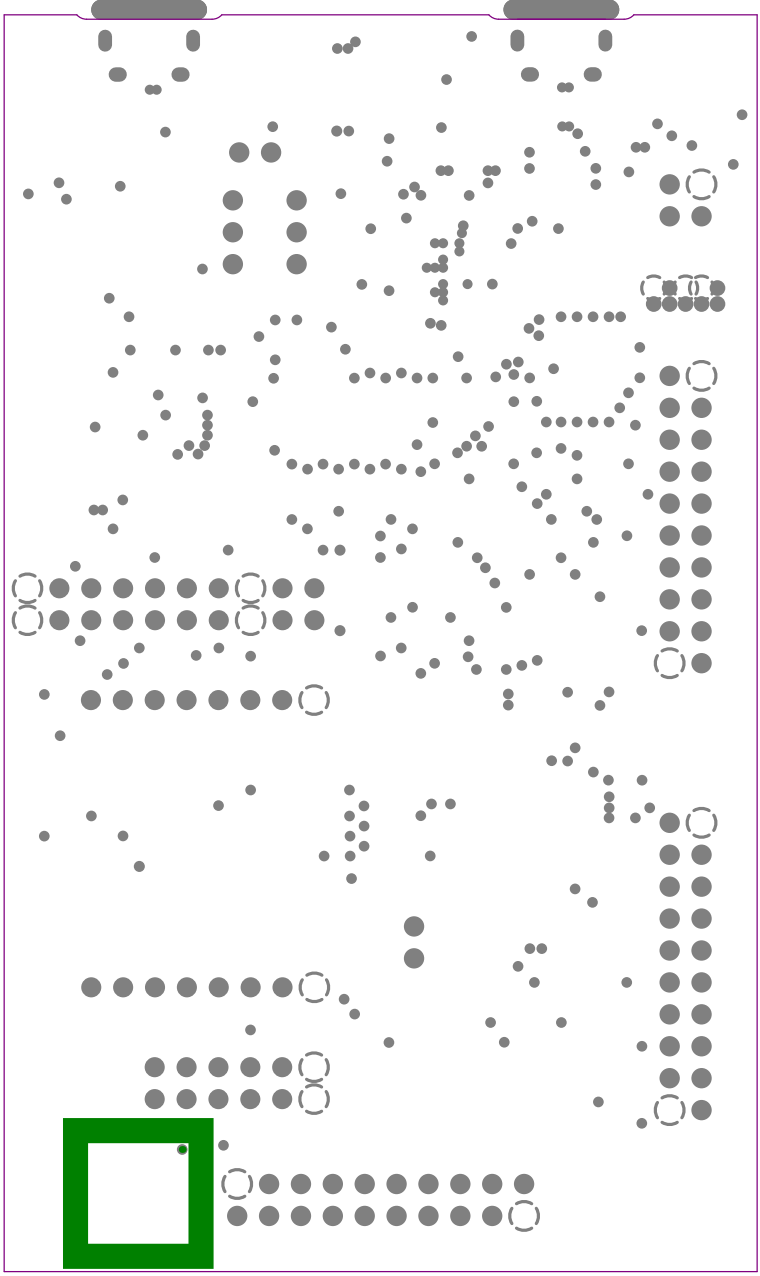

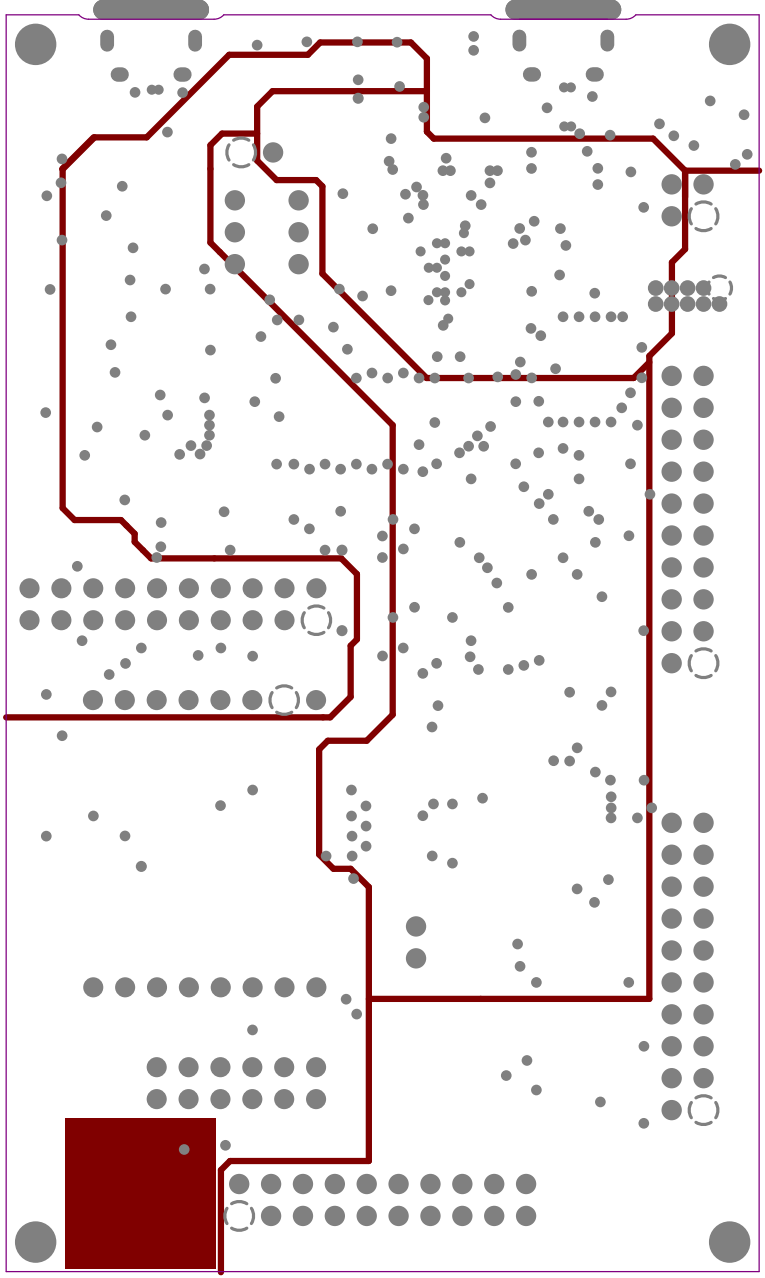

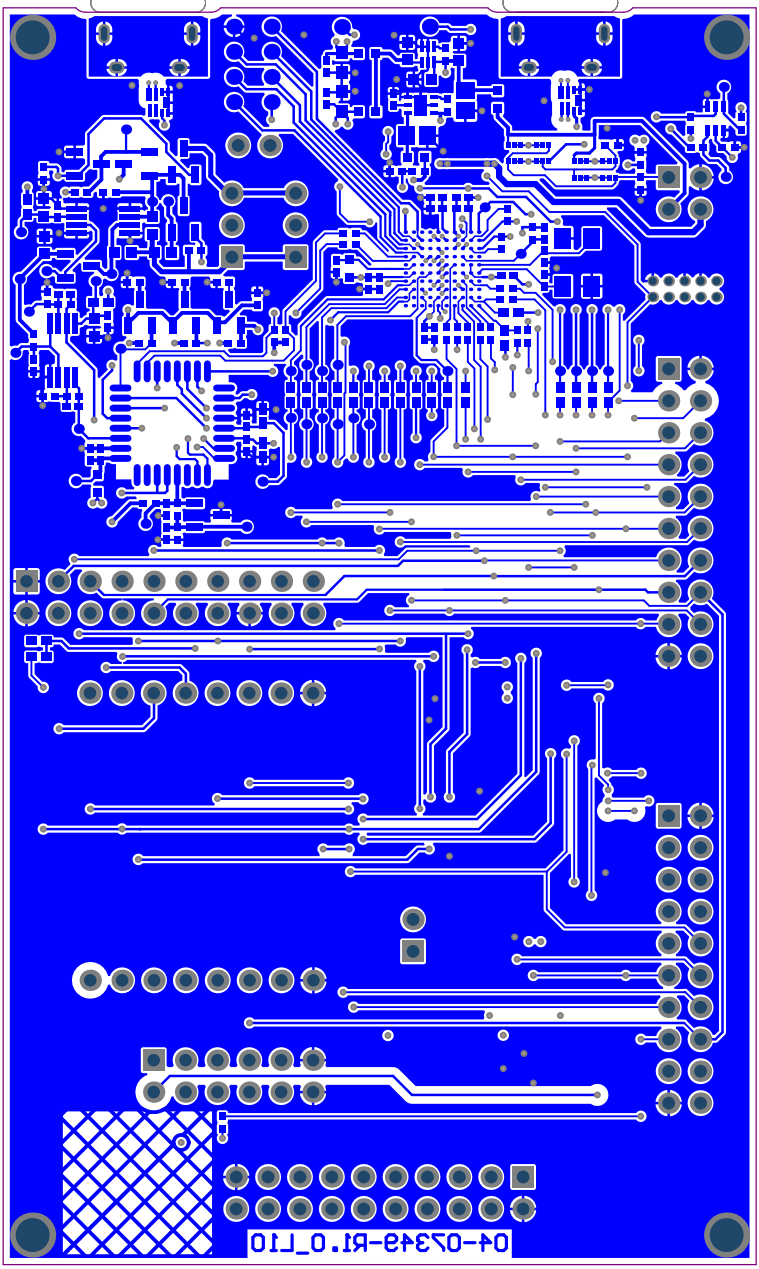
04-07349-R1.0_L10