

HIRSCHMANN MOBILITY



IRIDIUM/ GNSS (GPS/GLONASS) Screw Antenna

IGN 1620 LP S/series
Pt. no.
956-310-3..

- For use in telematic applications
- Low profile (19mm height)
- Mounting on several surfaces (e.g. plastic, metal, ...)
- Customization of cable lengths, types and connectors possible

Subject to alterations

1. Technical data

Dimensions	124mm x 80mm x 21mm
Weight	200 g
Temperature range	-40°C to +85°C
Protection class	IP66 (acc. IEC 60529)
IRIDIUM	
Frequency range	1616 - 1626.5 MHz
Impedance	50 Ohm
VSWR	≤ 1.8
Gain	3 dBic ³
Polarization	RHCP
Axial ratio	< 4 dB
Load capacity	8 W
Lightning protection	DC grounded
GNSS(GPS / GLONASS)	
Frequency range	1575 - 1614 MHz
Impedance	50 Ohm
Gain	2 dBic min. ³
Amplification	26 ± 3 dB typ.
Noise figure (50 Ohm)	≤ 1.4 dB typ.
Voltage supply	3 V - 5.5 V
Current consumption	≤ 13 mA at 5 V ± 0.5 V

¹ Other cable lengths available upon request

² Other configurations available upon request


³ dBic: referenced to an isotropic radiator, circular polarization

Subject to alterations

2. Product Family

Order Code	Cable (length)		Connector (type)		Remark
Versions	IRIDIUM	GNSS	IRIDIUM	GNSS	IRIDIUM / GNSS
	L1	L2	C1	C2	
956-310-301	200 mm	170 mm	SMA male	SMA male	Cable RG174, ROHS
956-310-302	200 mm	170 mm	SMA female	SMA female	Cable RG174, ROHS
Customization of cable lengths, types and connectors possible.					

3. Technical Drawings

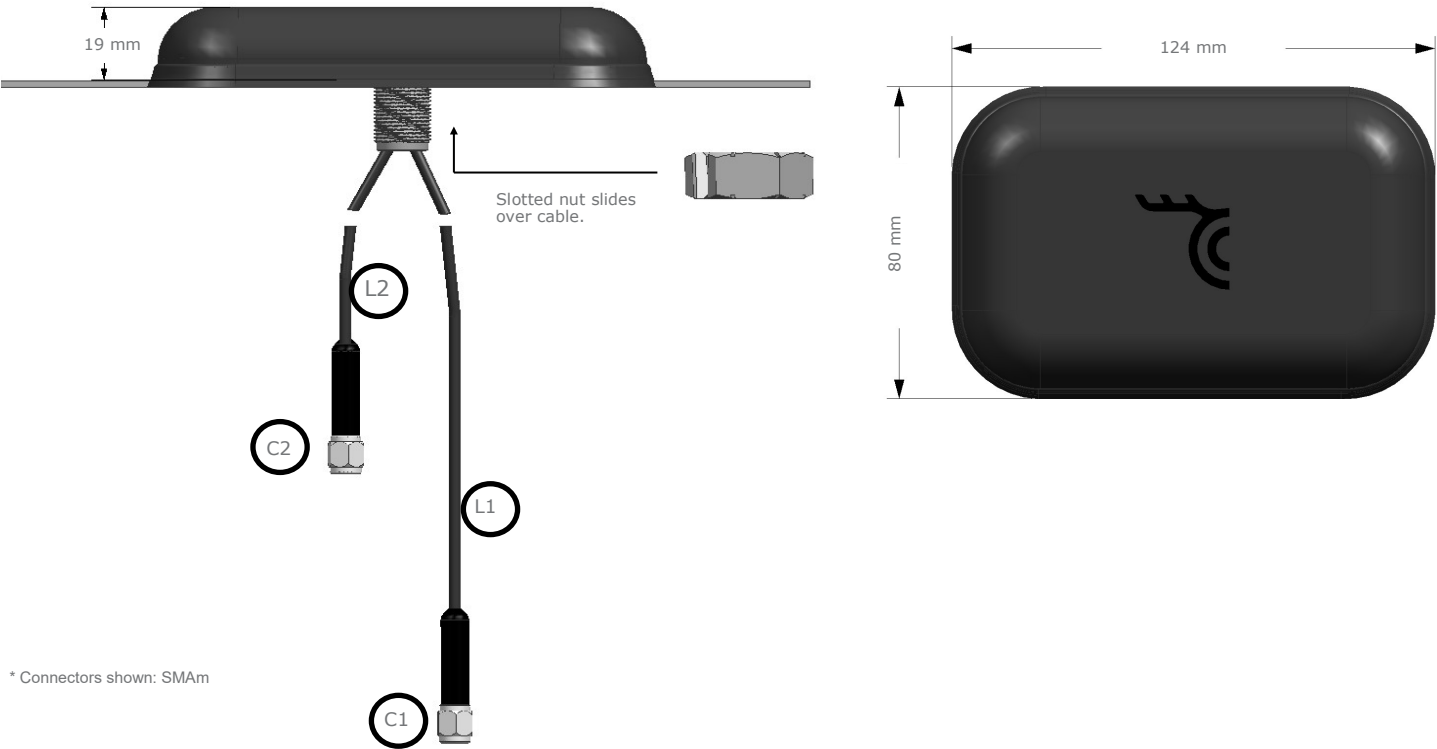

Subject to alterations


4. Mounting example and procedure

Vehicle roof mounting


Mounting requirements and restrictions

- Choose appropriate mounting location on flat surface (see Sketch #1) .
- Max. tolerable mounting material thickness 10 mm.
- Safely drill 15 mm mounting hole at desired location (see Sketch #2)
- Clean mounting area with isopropyl alcohol or similar.
- Unscrew mounting nut (see Sketch #3)
- Feed all cables through mounting hole (see Sketch #4)
- Slide slotted mounting nut over cables and screw back on to antenna mounting stud.
- Maximum tightening torque is 5Nm.

Sketch #1 - Select Mounting Location

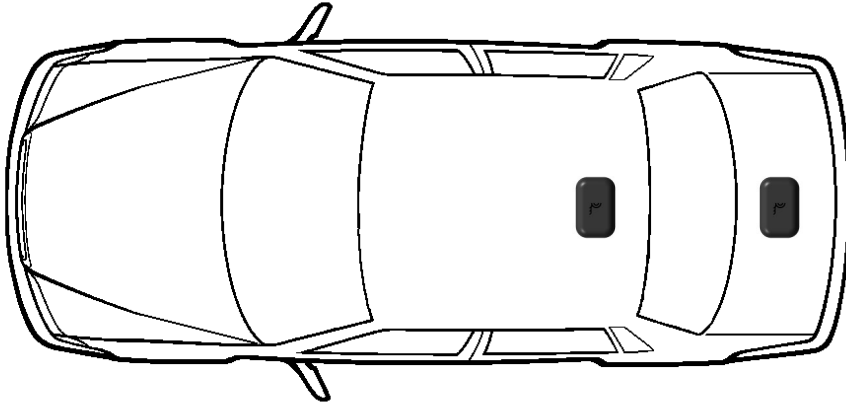

Sketch #2 - Required Mounting hole



Sketch #3—Mounting Nut



Sketch #4 - Mount in hole



www.te.com/hirschmann-mobility

hirschmann-mobility@te.com

TE, TE Connectivity, TE connectivity (logo), and EVERY CONNECTION COUNTS are trademarks. Hirschmann is a trademark.

IRIDIUM and GLONASS are trademarks.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Ltd. family of companies All Rights Reserved.