

LMR14003Y/6YEVM Evaluation Board

1 Introduction

This document describes the setup and the input/output connections of the EVM. Included are the board layout, schematic, and bill of materials. The Texas Instruments LMR14003Y/6YEVM evaluation module (EVM) helps designers evaluate the operation and performance of the LMR14003Y and LMR14006Y switching mode power supply.

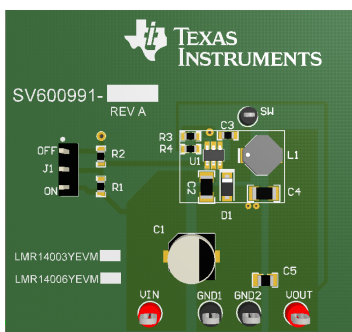


Figure 1. LMR14003Y/6YEVM Board

The LMR14003Y and LMR14006Y is a PWM DC/DC buck (step-down) regulator. With a wide input range from 4V to 40V, it is suitable for a wide range of applications from automotive to industry for power conditioning from unregulated sources. The LMR14003Y/6YEVM evaluation board is designed to provide the design engineer with a fully functional power converter based on the buck topology to evaluate the LMR14003Y/6Y series of buck regulators.

1.1 EVM Features

- 6V to 18V Input Voltage Range
- 5V Output Voltage
- Up to 300mA(LMR14003Y) or 600mA (LMR14006Y) Output Current
- Switching Frequency 2.1 MHz (1.1MHz for X version)
- Frequency Foldback Current Limit of 0.6A/1.1A
- Internal Compensation

The EVM contains one DC / DC converter (See [Table 1](#))

Table 1. Device and Package Configurations

CONVERTER	EVM	IC	PACKAGE
U1	LMR14003YEVM	LMR14003YDDCR	SOT23-6
	LMR14006YEVM	LMR14006YDDCR	

2 Setup

This section describes the jumpers and connectors on the EVM and how to properly connect, set up and use the LMR14003Y/6YEVM.

2.1 Input/Output Connector Description

Vin – Input is the power input terminal for the device. Adjacent to it is the GND reference ground. Use those terminals to attach the EVM to a cable harness.

Vout – Output is the output terminal for the LMR14003Y/6Y switch-mode regulator. Adjacent to it is the GND reference ground.

EN is the jumper used to enable the switch-mode converter. The rail will be enabled when the respective jumper is high or floating, and disabled when low. External resistors can also be used to adjust the EN turn off trip point, and the jumper should not be used in that case.

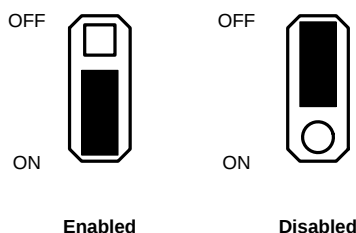


Figure 2. Enable Jumper Setting

2.2 Adjusting the Output Voltage

The output voltage can be changed from 5.0V to another voltage by adjusting the feedback resistors using the following equation:

$$V_{OUT} = V_{FB} (1 + (R_4/R_3)) \quad (1)$$

Where VFB is 0.765V.

Test Points

- TP_GND (x2) Ground
- TP_Vin BUCK input
- TP_Vout BUCK output
- TP_SW Buck Phase pin

3 Board Layout

Figure 3 and Figure 4 show the board layout for the LMR14006YEVm. The EVm offers jumper to enable the regulator.

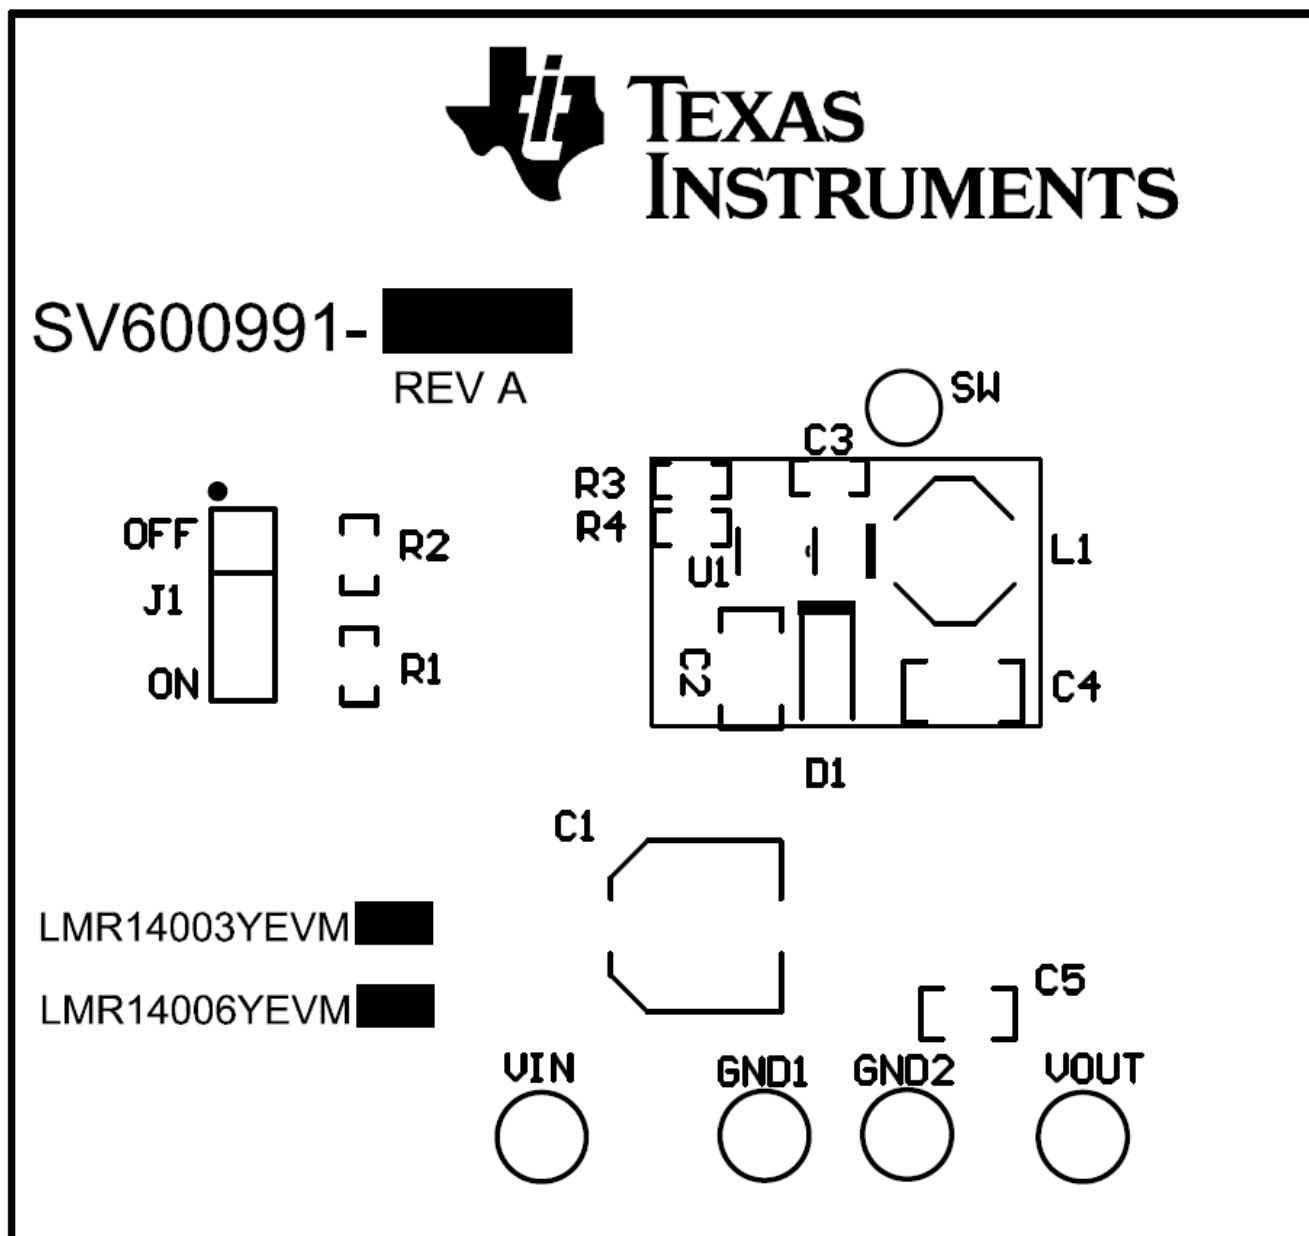


Figure 3. Top Layer

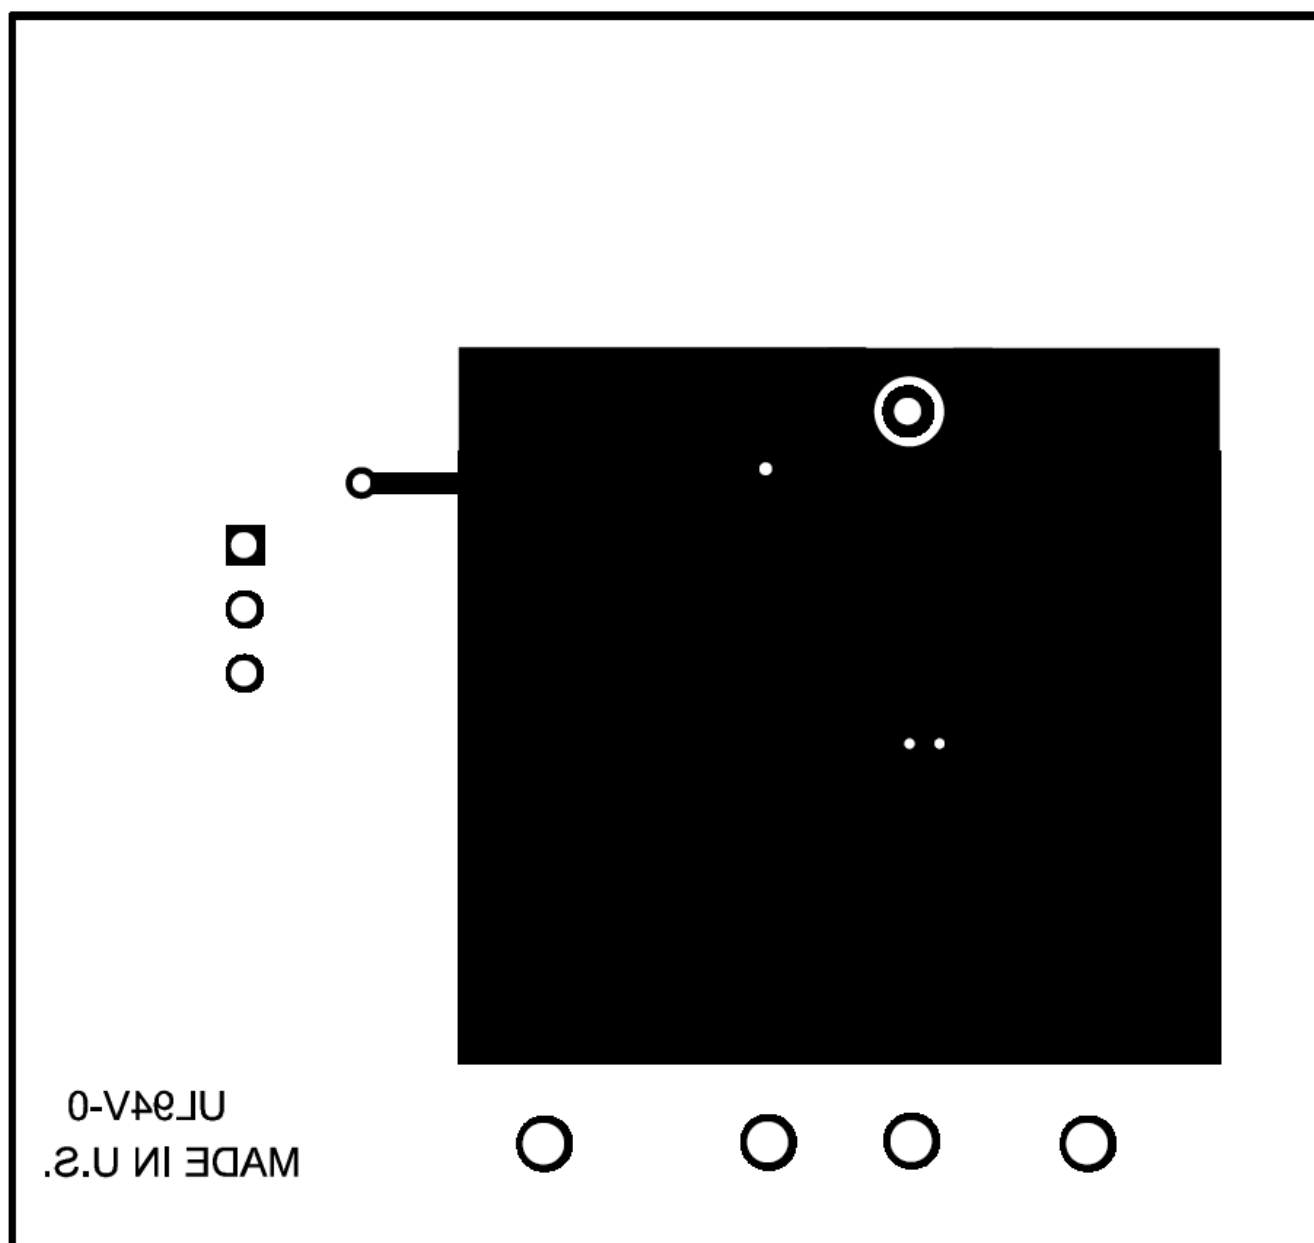


Figure 4. Bottom Layer

4 Schematic and Bill of Materials

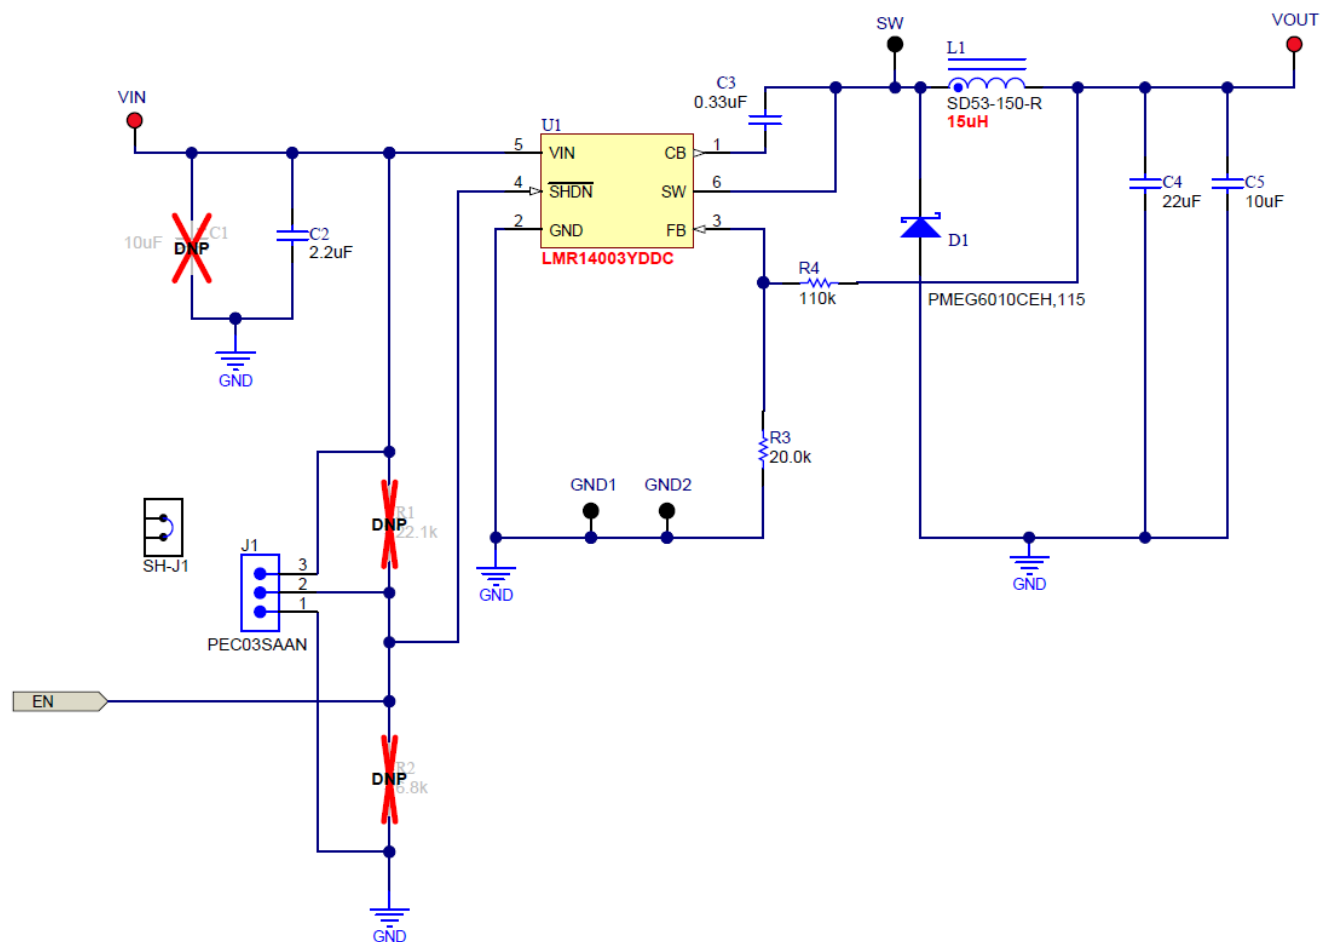


Figure 5. LMR14006YEVM Schematic

Table 2. LMR14003Y/6YEVMM Bill of Materials (BOM)

Quantity		Designator	P/N	Description	Footprint	Manufacturer
LMR14003Y	LMR14006Y					
1	1	PCB	PCB	Printed Circuit Board, FR4, 1oz, 2 Layers, size 1922x2054mil	1922x2054mil	Any
0	0	C1	EEE-FC1H100P	CAP, AL, 10uF, 50V, +/-20%, 2 ohm, SMD	SM_RADIAL_D	Panasonic
1	1	C2	GRM31CR71H225KA88L	CAP, CERM, 2.2uF, 50V, +/-10%, X7R, 1206	1206	MuRata
1	1	C3	C0603C334K4RACTU	CAP, CERM, 0.33uF, 16V, +/-10%, X7R, 0603	0603	Kemet
1	1	C4	GRM31CR61C226KE15L	CAP, CERM, 22uF, 16V, +/-10%, X5R, 1206	1206	MuRata
1	1	C5	GRM21BR61C106KE15L	CAP, CERM, 10uF, 16V, +/-10%, X5R, 0805	0805	MuRata
1	1	R3	CRCW060320K0FKEA	RES, 20.0k ohm, 1%, 0.1W, 0603	0603	Vishay-Dale
1	1	R4	CRCW0603110KFKEA	RES, 110k ohm, 1%, 0.1W, 0603	0603	Vishay-Dale
1	1	D1	B260A-13-F	Diode, Schottky, 60V, 2A, SMA	SOD-123F	Diodes Inc.
1	0	L1	SD53-150-R	Inductor, Ferrite, 15uH, 1.1A, 0.122 ohm, SMD	5.2x5.2mm	Cooper Bussman
0	1	L1	SD53-6R8-R	Inductor, Ferrite, 6.8uH, 1.65A, 0.059 ohm, SMD	5.2x5.2mm	Cooper Bussman
1	1	J1	PEC03SAAN	Header, 100mil, 3x1, Tin plated, TH	CONN_PEC03SAAN	Sullins
2	2	GND	5011	Test Point, Multipurpose, Black, TH	Keystone5011	Keystone
1	1	SW	5001	Test Point, TH, Miniature, Black	Keystone5001	Keystone
2	2	VIN, VOUT	5010	Test Point, Multipurpose, Red, TH	Keystone5010	Keystone
1	0	U1	LMR14003YDDC	IC, 300 mA 40V Step-Down Converter, SOT23-6	SOT23-6	TI
0	1	U1	LMR14006YDDC	IC, 600 mA 40V Step-Down Converter, SOT23-6	SOT23-6	TI

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com