

HPC-7480

4U Rackmount/Tower Chassis for EATX Server Board with 8 Hot-swap Drive Bays, Single PSU and 7 Expansion Slots




Features

- 4U rackmount chassis supports ATX/CEB/EATX motherboard
- Eight hot swap SAS/SATA drive bays
- Hot swap fan module design facilitates maintenance
- 665 W high efficiency single power supply
- Lockable front bezel prevents unauthorized access


Specifications

Form Factor Support	4U chassis support for max. motherboard size - 12" x 13" EATX		
Expansion Slots	7 x Full-height, Full-length slots		
Drive Bay	Slim ODD Bay	-	
	5.25" (front-accessible)	3 (ODD should be purchased separately)	
	3.5" (front-accessible)	8	
	3.5" (internal)	-	
	2.5" (front-accessible)	-	
	2.5" (internal)	-	
Cooling	Chassis Fan	4 (8 cm / 68.15 CFM)	
	Air Filter	Yes	
System Monitoring	-		
Front I/O Interface	USB	2	
	PS/2	-	
Miscellaneous	LED Indicators	Power, HDD activity, LAN	
	Rear Panel	-	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40° C (32 ~ 104° F)	-40 ~ 70° C (-40 ~ 158° F)
	Humidity	10 ~ 85% @ 40° C non-condensing	10 ~ 95% @ 40° C, non-condensing
	Vibration (5-500 Hz)	1 Grms	2 Grms
	Shock	10 G	30 G
	(with 11 ms duration, half sine wave)		
Physical Characteristics	Dimensions (W x H x D)	452 x 178 x 648 mm (4U)	
	Weight	29.94 kg	


Front View

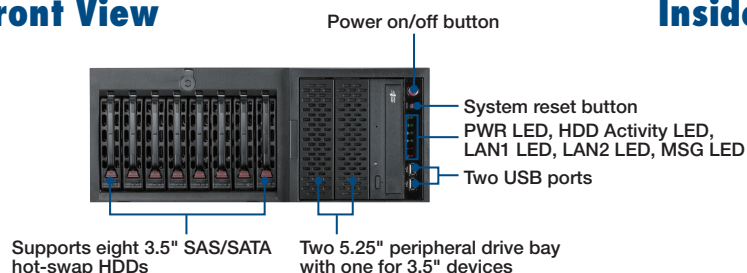

Inside View

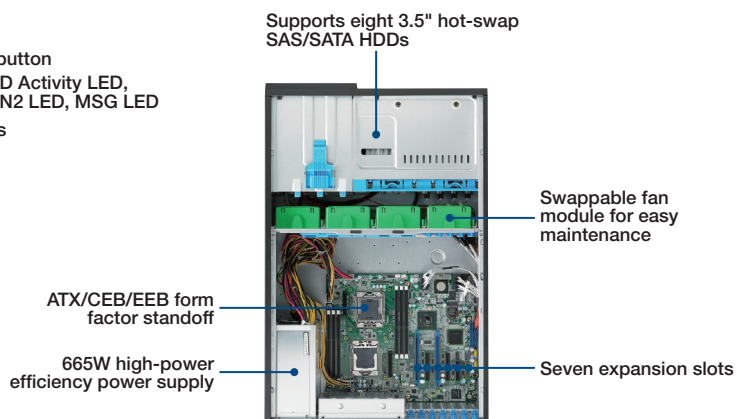


Rear View

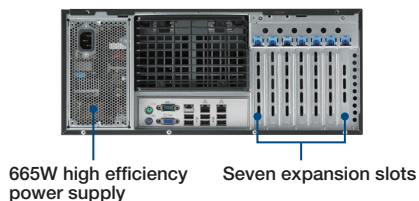

Dimensions

Unit: mm [inch]

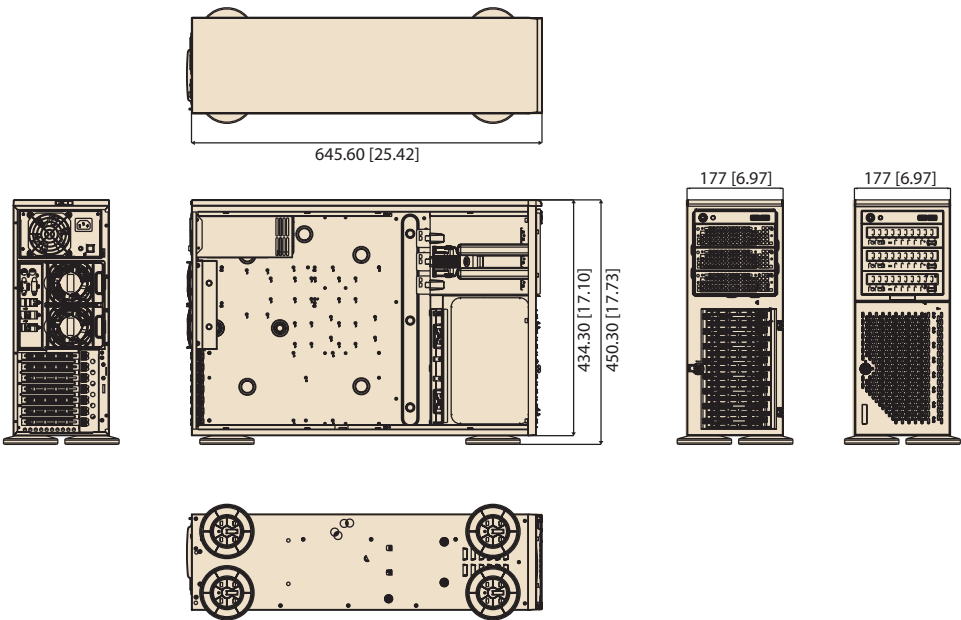

Ordering Information

Part Number	Power Supply
HPC-7480-66A1E	665 W Single Power Supply

Packing List

Description	Quantity
Hot-swap 3.5" HDD Trays (Pre-installed)	x 8
Key for front bezel door	x 2
Startup Manual	x 1
Chassis Feet	x 4

Optional Accessories

Part Number	Description
XSMC-CSE-PT26L-B	HPC-7480 Chassis Rail Kit including mounting ears, handles and slide rail
96CB-SAS-SATA-4P1	Mini-SAS cable kit for add-on SAS RAID card*

*Note: When using add-on RAID card with mini-SAS connector(s), purchasing 96CB-SAS-SATA-4P1 cable is a MUST. Single port RAID card needs 1 piece and dual port needs 2 pieces.