



1.7W 22mm 12V AC Square Module

AC LED Technology by Lynk Labs


Compatible with Phase-cut Dimmers

5 yr. Warranty when used with TRP 12V AC power supply

Specifications

Drive Voltage:	Power with TRP #99002, 99004, 99006, or suitable 12V magnetic transformer. Not to exceed 13V.
AC Current:	150 mA @25°C typical; 200 mA max
Power Dissipation:	1.7W typical; 2W max
Life:	50,000 Hrs, if used as specified
Luminous Flux:	112 lm @3000K
Luminous Efficacy:	66 LPW ±10% @3000K
Viewing Angle:	120 deg
Operating Temp:	-25°C to +100°C
Storage Temp:	-40°C to +100°C
Soldering Temp:	370°C

Low voltage AC LED modules offer an effective replacement for incandescent, Xenon or Halogen lamps. Patented AC LED technology eliminates the need for an AC-DC driver. Compatible with existing magnetic or electronic 12V AC power supplies.

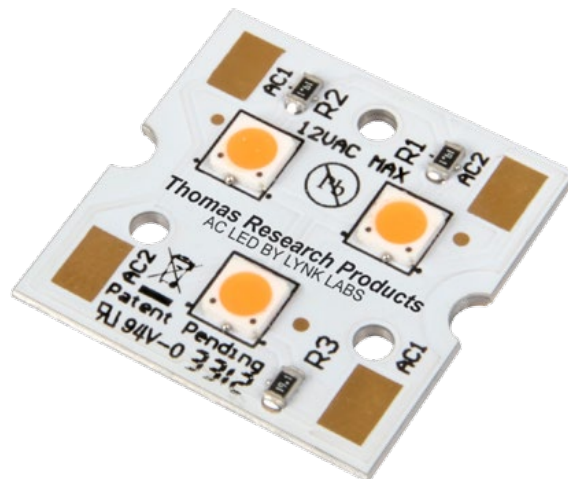

Features


- Compatible with existing 12V AC Power Supplies
- Polarity Independent
- Reliable, fast and easy - "Plug & Play"
- Compatible with most existing leading edge or trailing edge phase cut AC Dimmers
- High Power Efficiency
- High Power Factor
- Significant Energy Savings
- Durable Light Source
- Long Operating life
- Design fits standard Ledil optics. (Compare dimensional drawings to optic data sheets to ensure compatibility.)

Applications

- Under Cabinet Lights
- Step Lights
- Accent Lights
- Garden Lights
- Display Lights


Wiring

Connect one side of the 12Vac supply to either "AC1" pad, and the other side to earth "AC2" pad.



22mm 12V AC Square LED Module

Model Number	Input Power (W)	Input Voltage (Vac)	Color Temp (K)	Lumens	LPW
99191	1.7	12	2200	96	56
99192	1.7	12	2700	107	63
99193	1.7	12	3000	112	66
99194	1.7	12	4000	128	75
99195	1.7	12	5000	140	82

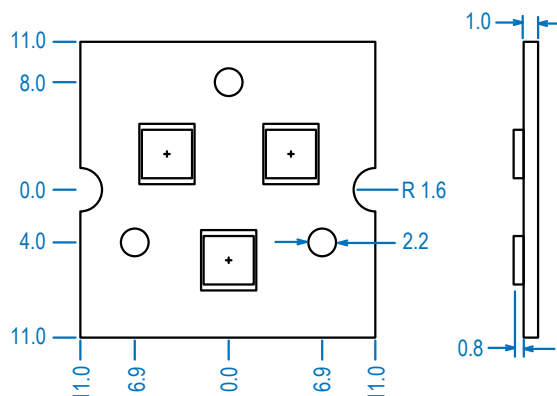




1.7W 22mm 12V Square AC LED Light Engine

SSL Solutions Faster Than The Speed Of Light®

Pg 2 of 4

CIE Chromaticity Coordinates:

(VF=12Vrms, Ta=25°C, pulsed measurement)

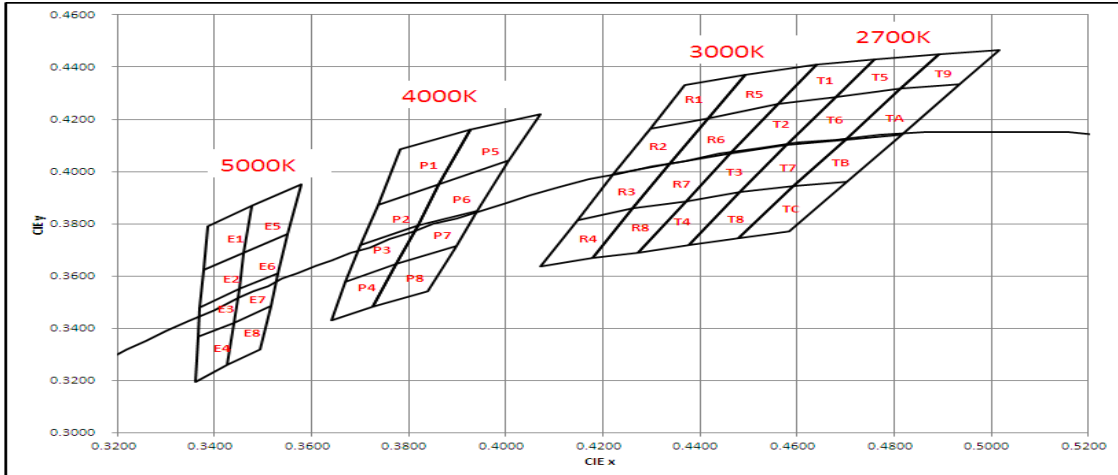


Energy Star ANSI	Rank	x1	y1	x2	y2	x3	y3	x4	y4	Center CCT(K)
TY	T2	0.4562	0.426	0.4463	0.407	0.4578	0.4101	0.468	0.4285	2700
	T3	0.4463	0.407	0.4371	0.3885	0.4482	0.392	0.4578	0.4101	
	T6	0.468	0.4285	0.4578	0.4101	0.47	0.412	0.4813	0.4319	
	T7	0.4578	0.4101	0.4482	0.392	0.4593	0.3944	0.47	0.412	
	T1	0.464	0.441	0.4562	0.426	0.468	0.4285	0.476	0.443	
	T4	0.4371	0.3885	0.4273	0.369	0.4376	0.372	0.4482	0.392	
	T5	0.476	0.443	0.468	0.4285	0.4813	0.4319	0.4892	0.445	
	T8	0.4482	0.392	0.4376	0.372	0.448	0.3745	0.4593	0.3944	
	T9	0.4892	0.445	0.4813	0.4319	0.4935	0.4335	0.5017	0.4465	
	TA	0.4813	0.4319	0.47	0.412	0.4815	0.414	0.4935	0.4335	
	TB	0.47	0.412	0.4593	0.3944	0.4702	0.396	0.4815	0.414	
	TC	0.4593	0.3944	0.448	0.3745	0.4585	0.377	0.4702	0.396	
RY	R2	0.4299	0.4165	0.422	0.399	0.4338	0.403	0.4416	0.4205	3000
	R3	0.422	0.399	0.4147	0.3814	0.4262	0.386	0.4338	0.403	
	R6	0.4416	0.4205	0.4338	0.403	0.4463	0.407	0.4562	0.426	
	R7	0.4338	0.403	0.4262	0.386	0.4371	0.3885	0.4463	0.407	
	R1	0.437	0.4332	0.4299	0.4165	0.4416	0.4205	0.4493	0.437	
	R4	0.4147	0.3814	0.407	0.3636	0.4178	0.367	0.4262	0.386	
	R5	0.4493	0.437	0.4416	0.4205	0.4562	0.426	0.464	0.441	
	R8	0.4262	0.386	0.4178	0.367	0.4273	0.369	0.4371	0.3885	
PY	P2	0.374	0.3888	0.37	0.372	0.3818	0.3795	0.3863	0.395	4000
	P3	0.37	0.372	0.367	0.3568	0.377	0.363	0.3818	0.3795	
	P6	0.3863	0.395	0.3818	0.3795	0.3941	0.385	0.3996	0.4015	
	P7	0.3818	0.3795	0.377	0.363	0.3889	0.369	0.3941	0.385	
	P1	0.3783	0.4085	0.374	0.3888	0.3863	0.395	0.3926	0.416	
	P4	0.367	0.3568	0.364	0.343	0.3727	0.3482	0.377	0.363	
	P5	0.3926	0.416	0.3863	0.395	0.3996	0.4015	0.407	0.422	
	P8	0.377	0.363	0.3727	0.3482	0.384	0.354	0.3889	0.369	
EY	E2	0.3377	0.3625	0.3368	0.348	0.345	0.355	0.3461	0.369	5000
	E3	0.3368	0.348	0.3366	0.3369	0.344	0.342	0.345	0.355	
	E6	0.3461	0.369	0.345	0.355	0.353	0.361	0.3551	0.376	
	E7	0.345	0.355	0.344	0.342	0.3515	0.3487	0.353	0.361	
	E1	0.3385	0.379	0.3377	0.3625	0.3461	0.369	0.3477	0.387	
	E4	0.3366	0.3369	0.336	0.3195	0.3425	0.326	0.344	0.342	
	E5	0.3477	0.387	0.3461	0.369	0.3551	0.376	0.358	0.395	
	E8	0.344	0.342	0.3425	0.326	0.3495	0.332	0.3515	0.3487	


Thomas Research Products
AC LED BY LYNK LABS

Typical Electrical & Optical Characteristic Curves:


Relative Power / Voltage

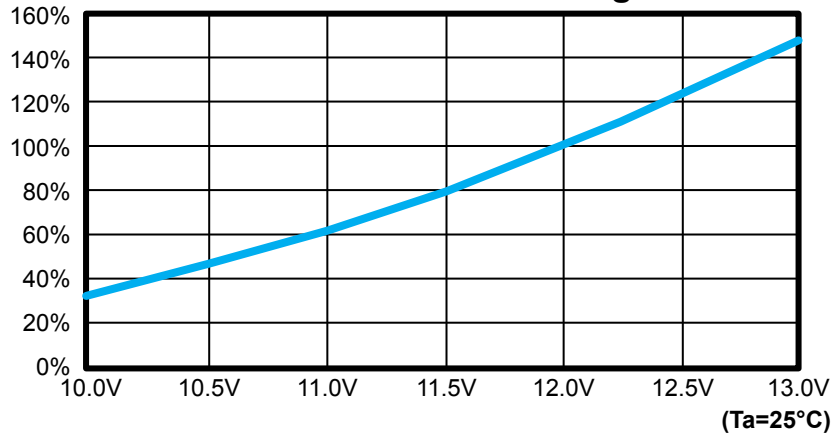

Relative Luminous Flux / Voltage

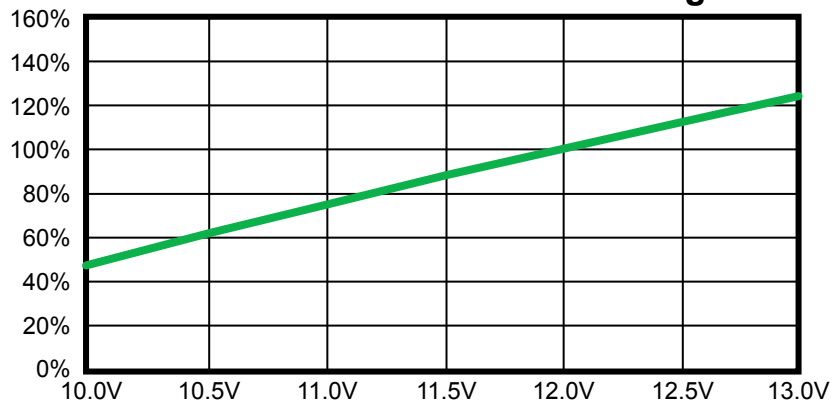


Lumen Thermal De-Rating Curve

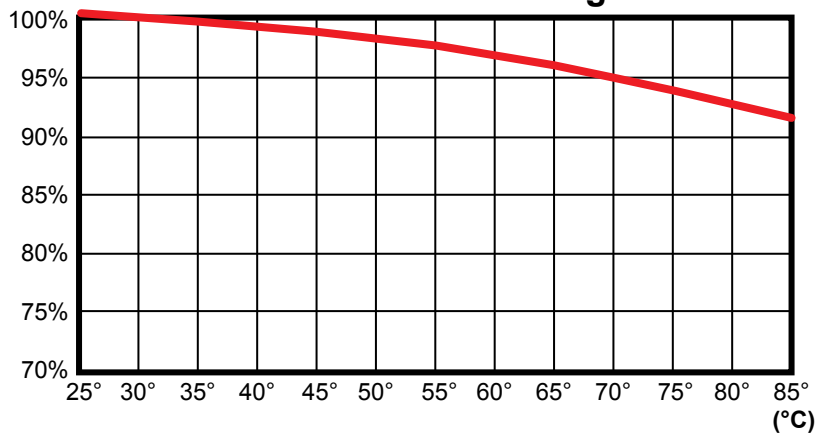


Typical Electrical & Optical Characteristic Curves:

Spectrum (VF=12Vrms, Ta=25°C, pulsed measurement)

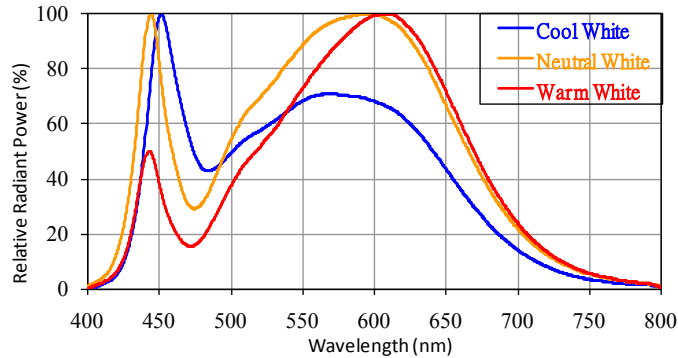

Radiant Angle & Pattern (VF=12Vrms, Ta=25°C, pulsed measurement)

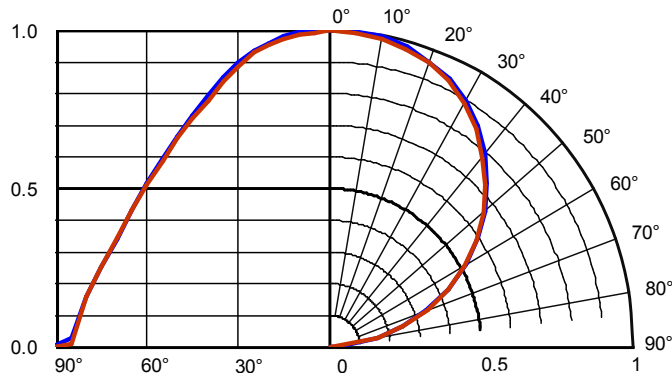

Emitting Color	Center CCT (K)	Flux Code	Min	Max
Warm White	2700	F28	45	50
		F29	50	55
		F30	55	60
		F31	60	68
		F32	68	75
		F33	75	85
Warm White	3000	F34	85	95
		F28	45	50
		F29	50	55
		F30	55	60
		F31	60	68
		F32	68	75
Neutral White	4000	F33	75	85
		F34	85	95
		F35	95	110
		F29	50	55
		F30	55	60
		F31	60	68
Cool White	5000	F32	68	75
		F33	75	85
		F34	85	95
		F35	95	110
		F30	55	60
		F31	60	68
		F32	68	75
		F33	75	85
		F34	85	95
		F35	95	110
		F36	110	125

Packaging

- LED Modules will be packaged in trays for primary protection.
- According to the total delivery amount, cardboard boxes will be used to protect the trays of LED Modules from mechanical shocks during transportation.
- The boxes are not water resistant and therefore must be kept away from water and moisture.

Reliability and Average Lumen Maintenance

Before releasing new products the manufacturer puts a representative product sample set through an entire suite of qualification tests, including the most stressful test for high power LEDs, the Wet High-Temperature Operating Life (WHTOL) test at 85°C/85%RH for 1000 hours at the specified operating current.

LED lifetime has been extrapolated based on the accumulated operating and accelerated aging data. Based on this data, the manufacturer projects that the LED products will deliver, on average, 70% lumen maintenance at 50,000 hours of operation at the specified operating current, provided that the case temperature is maintained at or below 80°C.

Design Considerations/Specifications

Thermal Management Requirements

- Heat Sink Required (22 square cm/watt surface area)
- Thermal epoxy – No mechanical mounting required
- Thermal tape – No mechanical mounting required
- Thermal grease – Mechanical mounting required

Mechanical Mounting

- Use nylon washers for all mounting holes when using screws.
- Do not put force on LEDs.
- Do not bend PCB.

Electrical Interface

- Solder Pads