




## Connectors System AC 164 Cables

### AC 164 ALSB/515 100 black "B2ca"

Extension Cable Socket, 5 pole, black, Coding: 1 (Mains), Cable Type: H05Z1Z1-F, Core Cross-Section: 1.5 mm<sup>2</sup>, Fire Class: B2ca, Length: 1.00 m, Voltage Rating: 250/400 V, Current Rating: 16 A

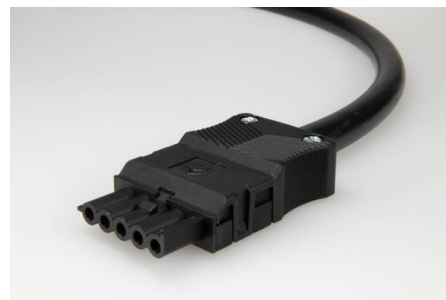

## Order Info

|                                    |                                               |
|------------------------------------|-----------------------------------------------|
| <b>Reference Number (ref. no.)</b> | 9B846510                                      |
| <b>Applications</b>                | Lighting, Installation, Electrical Appliances |
| <b>PU</b>                          | 0                                             |

## Type

|                                              |                        |
|----------------------------------------------|------------------------|
| <b>Type</b>                                  | Extension Cable Socket |
| <b>Number of poles</b>                       | 5 pole                 |
| <b>Colour</b>                                | black                  |
| <b>Coding</b>                                | 1 (Mains)              |
| <b>PE Function</b>                           | yes                    |
| <b>Protection Against Incorrect Plugging</b> | yes                    |
| <b>Latch</b>                                 | yes                    |

## Technical Data

|                                           |                                                      |
|-------------------------------------------|------------------------------------------------------|
| <b>Voltage Rating</b>                     | 250/400 V                                            |
| <b>Current Rating</b>                     | 16 A                                                 |
| <b>Insulating Material</b>                | PA 6.6                                               |
| <b>Contact Material</b>                   | Brass                                                |
| <b>max. Ambient Temperature Operation</b> | 70 °C                                                |
| <b>IP Code</b>                            | IP20                                                 |
| <b>IP Code when Plugged</b>               | IP40                                                 |
| <b>Type of Conductor Flexible</b>         | yes                                                  |
| <b>Stripping Length</b>                   | 7.0 mm                                               |
| <b>Dismantling Length PE</b>              | 26.0 mm                                              |
| <b>Dismantling Length</b>                 | 33.0 mm                                              |
| <b>Cable Type</b>                         | H05Z1Z1-F                                            |
| <b>Core Cross-Section</b>                 | 1.5 mm <sup>2</sup>                                  |
| <b>Fire Class</b>                         | B2ca                                                 |
| <b>Length</b>                             | 1.00 m                                               |
| <b>Approbation EN61535</b>                | AC 164_EN61535_20190125_DEKRA_ENEC_71-107174_web.pdf |