


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015246060](#)
Status: **Active**
Description: 4.20mm (.165") Pitch Mini-Fit BMI™ Header, Dual Row, Right Angle, with Snap-in Plastic Peg PCB Lock, 6 Circuits, PA Polyamide Nylon 6/6, UL 94V-2, with Tin (Sn) Plating

Documents:	
3D Model	Product Specification PS-5556-002 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	PCB Headers
Series	42404
Application	Board-to-Board, Wire-to-Board
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS™ Crimp Terminal Crimped to to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current de-rating information.
MolexKits	Yes
Product Name	Mini-Fit BMI™
Physical	
Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	30
Flammability	94V-2
Glow-Wire Compliant	No
Guide to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Number of Rows	2
Orientation	Right Angle
PC Tail Length (in)	0.130 In
PC Tail Length (mm)	3.30 mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.070 In
PCB Thickness Recommended (mm)	1.80 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.165 In
Pitch - Mating Interface (mm)	4.20 mm
Plating min: Mating (µin)	100
Plating min: Mating (µm)	2.50
Plating min: Termination (µin)	100
Plating min: Termination (µm)	2.50
Polarized to Mating Part	Yes

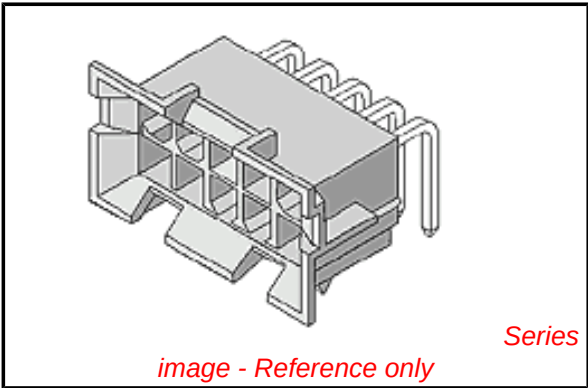

Series

image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[42404Series](#)

Mates With
[15-06-0060](#) Mini-Fit BMI™ Panel Mount Receptacle, [39-01-2060](#) Mini-Fit Jr.™ Receptacle, [15-24-7060](#) Mini-Fit BMI™ Vertical Receptacle Header, [44475-0611](#) Mini-Fit BMI™ SMC Vertical Receptacle Header

Polarized to PCB	Yes
Shrouded	Partial
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	13A
Voltage - Maximum	600V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	240
Material Info	
Old Part Number	A-42404-06A1
Reference - Drawing Numbers	
Packaging Specification	PK-42404-002
Product Specification	PS-5556-002
Sales Drawing	SDA-42404-****
Test Summary	TS-5556-002


This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


13 12 11 10 9 8 7 6 5 4 3 2 1

J
I
H
G
F
E
D
C
B
A




J
I
H
G
F
E
D
C
B
A

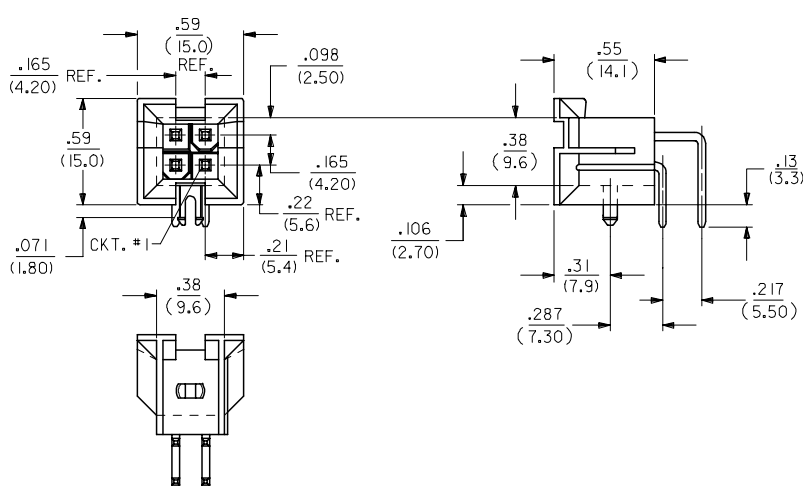

A-42404-04**

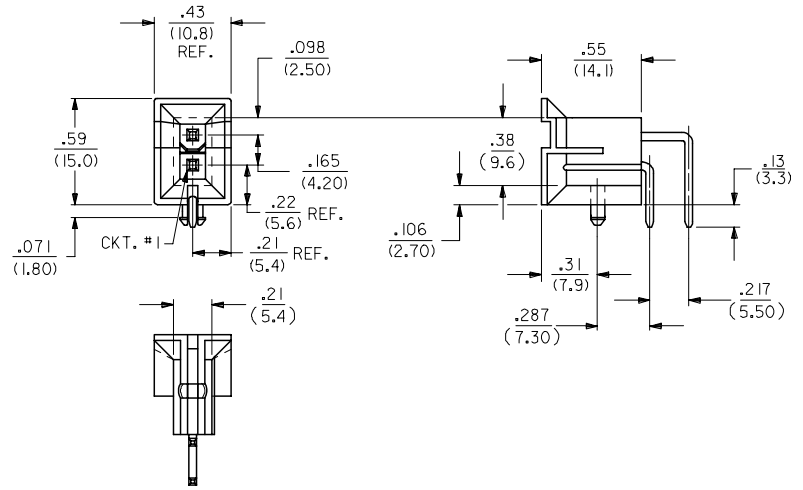

A-42404-02**

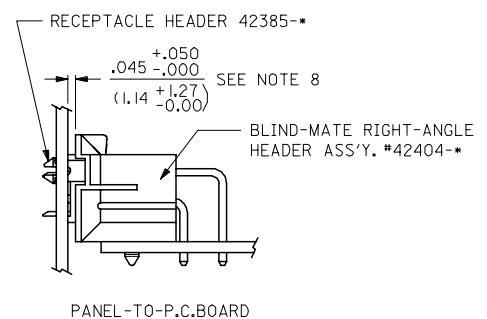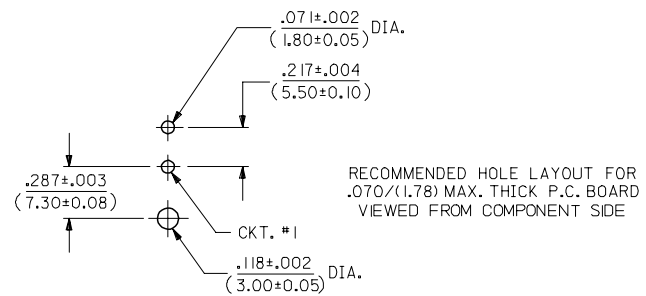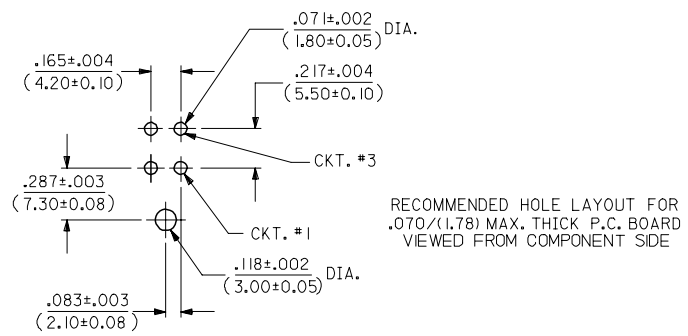

SEE SHEET 1 EC NO: UCP2006-1780 DRW:ADRA1NOL 2006/02/03 CHKD:GPOLGAR 2006/02/03 APPR:ICOMERCJ 2006/02/06 REV	QUALITY SYMBOLS ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 2:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
			mm		INCH		DRAWN BY DATE RWK 1989/02/07		TITLE MINI-FIT JR. 2-24 CKT RIGHT ANGLE HEADER ASSY (BLIND MATE)			
			3 PLACES ± --- ±.01		CHECKED BY DATE RKF 1989/02/07							
			2 PLACES ± 0.25 ±.015		APPROVED BY DATE RAS 1989/02/07							
			1 PLACE ± 0.38 ±---		MATERIAL NO.		DOCUMENT NO.	SHEET NO.				
			ANGULAR ±1/2°			SEE SHTS 3&4			SDA-42404-****		2 OF 4	
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

REMOVE PLATE CODE
EC NO: UCP2010-0864
DRWN: JAGUILAR 2010/01/18
CHKD: J.BELL 2010/01/06
APPR: F.S.MITH 2010/03/16

R2

QUALITY SYMBOLS
▽=0
▽=0

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
IN/MM

DRAWN BY
RWK

CHECKED BY
R.J.F

APPROVED BY
F.S.MITH

MATERIAL NO.

DATE
2010/03/16

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

TITLE
MINI-FIT JR. 2-24 CKT
RIGHT ANGLE HEADER ASSY
(BLIND MATE)

MOLEX INCORPORATED

DOCUMENT NO.
SDA-42404-****

SHEET NO.
3 OF 4

SIZE
C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PART NUMBER	ENG. NUMBER	CKT. SIZE	HOUSING MATERIAL	PLATING (NOTE 5)
NOT TOOLED	A-42404-02A1	2	94V-2	BRIGHT TIN OVER NICKEL
I5-24-6040	-04A1	4		
I5-24-6060	-06A1	6		
NOT TOOLED	-08A1	8		
I5-24-6100	-10A1	10		
NOT TOOLED	-12A1	12		
I5-24-6140	-14A1	14		
NOT TOOLED	-16A1	16		
I5-24-6180	-18A1	18		
NOT TOOLED	-20A1	20		
NOT TOOLED	-22A1	22		
I5-24-6240	A-42404-24A1	24	94V-2	BRIGHT TIN OVER NICKEL
NOT TOOLED	A-42404-02A2	2	94V-2	30 M.I. GOLD
I5-24-9043	-04A2	4		
I5-24-9063	-06A2	6		
NOT TOOLED	-08A2	8		
I5-24-9103	-10A2	10		
NOT TOOLED	-12A2	12		
I5-24-9143	-14A2	14		
NOT TOOLED	-16A2	16		
I5-24-9183	-18A2	18		
NOT TOOLED	-20A2	20		
NOT TOOLED	-22A2	22		
I5-24-9243	A-42404-24A2	24	94V-2	30 M.I. GOLD
NOT TOOLED	A-42404-02B1	2	94V-0	BRIGHT TIN OVER NICKEL
I5-24-9044	-04B1	4		
I5-24-9064	-06B1	6		
NOT TOOLED	-08B1	8		
I5-24-9104	-10B1	10		
NOT TOOLED	-12B1	12		
I5-24-9144	-14B1	14		
I5-24-9164	-16B1	16		
I5-24-9184	-18B1	18		
NOT TOOLED	-20B1	20		
NOT TOOLED	-22B1	22		
I5-24-9244	A-42404-24B1	24	94V-0	BRIGHT TIN OVER NICKEL
NOT TOOLED	A-42404-02B2	2	94V-0	30 M.I. GOLD
I5-24-9045	-04B2	4		
I5-24-9065	-06B2	6		
NOT TOOLED	-08B2	8		
I5-24-9105	-10B2	10		
NOT TOOLED	-12B2	12		
I5-24-9145	-14B2	14		
I5-24-9165	-16B2	16		
I5-24-9185	-18B2	18		
NOT TOOLED	-20B2	20		
NOT TOOLED	-22B2	22		
I5-24-9245	A-42404-24B2	24	94V-0	30 M.I. GOLD

13					12					11					10					9					8					7					6					5					4					3					2					1				
PART NUMBER		ENG. NUMBER		CKT. SIZE		HOUSING MATERIAL		PLATING (NOTE 5)		PART NUMBER		ENG. NUMBER		CKT. SIZE		HOUSING MATERIAL		PLATING (NOTE 5)		PART NUMBER		ENG. NUMBER		CKT. SIZE		HOUSING MATERIAL		PLATING (NOTE 5)		PART NUMBER		ENG. NUMBER		CKT. SIZE		HOUSING MATERIAL		PLATING (NOTE 5)		PART NUMBER		ENG. NUMBER		CKT. SIZE		HOUSING MATERIAL		PLATING (NOTE 5)		PART NUMBER		ENG. NUMBER		CKT. SIZE		HOUSING MATERIAL		PLATING (NOTE 5)						
N0T TOOLED		A-42404-02A3		2		94V-2		MATTE TIN OVER NICKEL		N0T TOOLED		A-42404-02A3		2		94V-2		MATTE TIN OVER NICKEL		N0T TOOLED		A-42404-02A3		2		94V-2		MATTE TIN OVER NICKEL		N0T TOOLED		A-42404-02A3		2		94V-2		MATTE TIN OVER NICKEL		N0T TOOLED		A-42404-02A3		2		94V-2		MATTE TIN OVER NICKEL																
N0T TOOLED		-04A3		4						N0T TOOLED		-04A3		4						N0T TOOLED		-04A3		4						N0T TOOLED		-04A3		4						N0T TOOLED		-04A3		4																				
N0T TOOLED		-06A3		6						N0T TOOLED		-06A3		6						N0T TOOLED		-06A3		6						N0T TOOLED		-06A3		6						N0T TOOLED		-06A3		6																				
N0T TOOLED		-08A3		8						N0T TOOLED		-08A3		8						N0T TOOLED		-08A3		8						N0T TOOLED		-08A3		8						N0T TOOLED		-08A3		8																				
N0T TOOLED		-10A3		10						N0T TOOLED		-10A3		10						N0T TOOLED		-10A3		10						N0T TOOLED		-10A3		10						N0T TOOLED		-10A3		10																				
N0T TOOLED		-12A3		12						N0T TOOLED		-12A3		12						N0T TOOLED		-12A3		12						N0T TOOLED		-12A3		12						N0T TOOLED		-12A3		12																				
N0T TOOLED		-14A3		14						N0T TOOLED		-14A3		14						N0T TOOLED		-14A3		14						N0T TOOLED		-14A3		14						N0T TOOLED		-14A3		14																				
N0T TOOLED		-16A3		16						N0T TOOLED		-16A3		16						N0T TOOLED		-16A3		16						N0T TOOLED		-16A3		16						N0T TOOLED		-16A3		16																				
N0T TOOLED		-18A3		18						N0T TOOLED		-18A3		18						N0T TOOLED		-18A3		18						N0T TOOLED		-18A3		18						N0T TOOLED		-18A3		18																				
N0T TOOLED		-20A3		20						N0T TOOLED		-20A3		20						N0T TOOLED		-20A3		20						N0T TOOLED		-20A3		20						N0T TOOLED		-20A3		20																				
N0T TOOLED		-22A3		22						N0T TOOLED		-22A3		22						N0T TOOLED		-22A3		22						N0T TOOLED		-22A3		22						N0T TOOLED		-22A3		22																				
N0T TOOLED		A-42404-24A3		24						N0T TOOLED		A-42404-24A3		24						N0T TOOLED		A-42404-24A3		24						N0T TOOLED		A-42404-24A3		24						N0T TOOLED		A-42404-24A3		24																				