

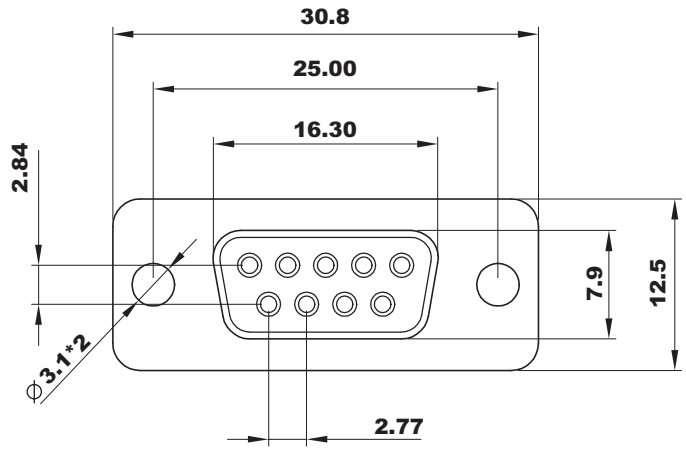


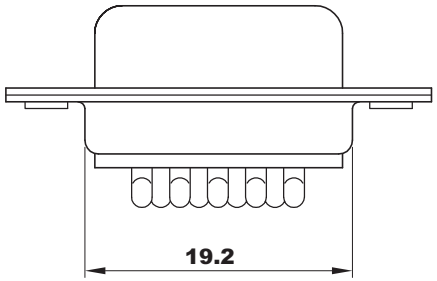



Specification:

Material:

Insulator: PBT, rated UL94V-0
Contacts: Brass
Shell: Steel

Contact Plating:

Gold Flash/Nickel

Electrical:

Operation Voltage: 250 VAC max.
Current Rating: 3 Amps max
Contact Resistance: 15 mohms max
Insulation Resistance: 3000 mohms min @ 500 VDC
Dielectric Withstanding Voltage: 1000 Vac/minute
Operating Temperature: -55°C to +105°C

Description

Name:

A-DF09LL-TL-B-R

D-Sub Solder (Female)

ASSMANN Electronic Components

RoHS Compliant

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.