
Product Specification:

Material:

Insulator: Glass-Filled Thermoplastic PBT, UL94V-0 rated
Contact: Brass or Phosphor Bronze
Shell: Steel, 100u" Tin over 50u" min Nickel
Clinch Nut: Brass: 100u" min Nickel Plated
Boardlock: Brass: 100u" min Nickel Plated
Screwlock: Brass: 100u" min Nickel Plated

Electrical:

Contact Resistance: 20 milliohms Max at 1 AMP DC
Insulation Resistance: 1000 magohms at 500 VDC
Dielectric Withstanding Voltage: 1000 VAC/rms 60Hz
for 1 minute
Current Rating: 5 Amp
Voltage Rating:250 VAC/rms 60Hz

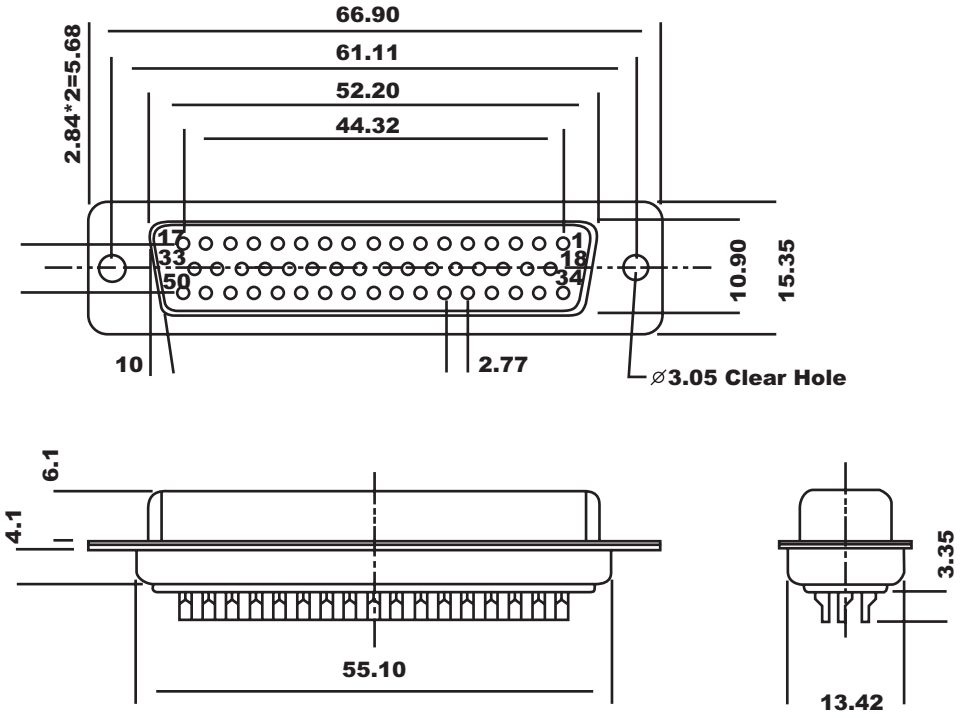

Description

Name:

A-DF50LL-TL-B

ASSMANN Electronic Components

RoHS Compliant

THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.