

D-Sub connectors for flat ribbon cable

Full-plastic version




A-DXFXXLP III/FP-R

No. of contacts


09/15/25/37

S - Male


F - Female

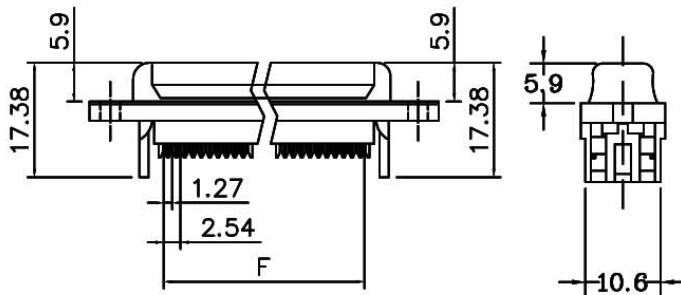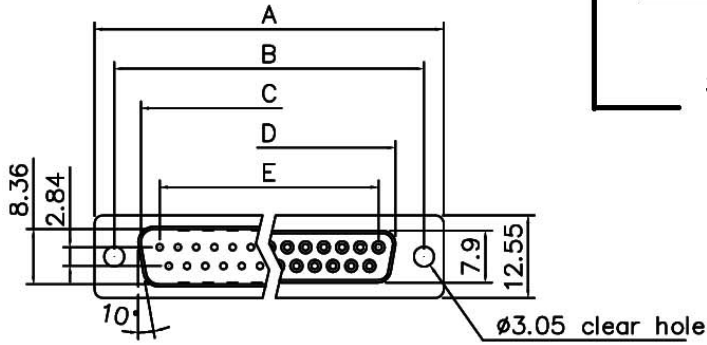

With Insulator Support

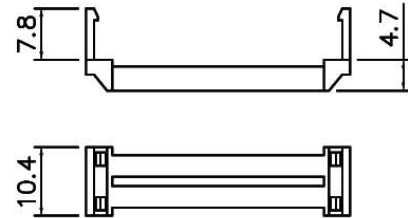


Strain Relief



RoHS COMPLIANT

Dimensions

Positions	A	B	C	D	E	F
9	30.81	24.99	16.92	16.33	11.08	10.16
15	39.14	33.32	25.50	24.66	19.39	17.78
25	53.04	47.04	38.96	38.38	33.24	30.48
37	69.32	63.50	55.42	54.84	49.86	45.72



A-DXFXXLP III/FP-R All Series

REV
R

ASSMANN
Electronic Components

DRAWN BY: JUSTIN

SCALE: NONE

DATE: 2005-10-07

CHECKED BY: John Ho

CUSTOMER: C331

PAGE: 1/1

APPROVED BY:

CUSTOMER P/N:

ALL DIMENSIONS IN mm (UNLESS OTHERWISE SPECIFIED)