



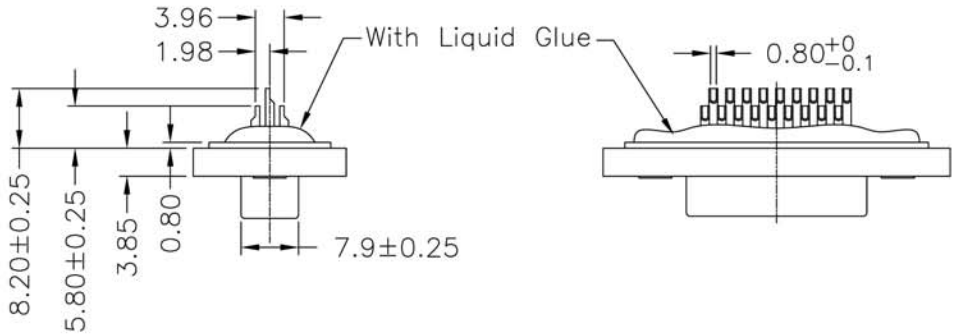


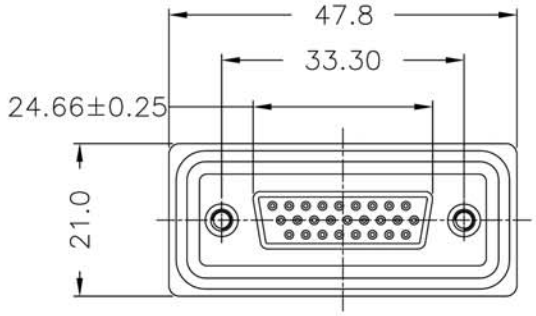








Screw L=5.0 For Panel Thickness Under 1.2mm

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

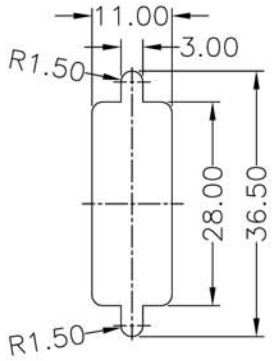

Recommended Panel Cut-Out

Note:

* Waterproof Rate: IP67
* Connector: Black,Nylon+GF
* Pin: Copper Alloy,Gold Plated
* Applicable Wire Range: 24AWG-28AWG

RoHS Compliant

ITEM NO
A-HDF26LL-WP

TITLE
D-SUB, High Density, Female, 26 pin, Solder Cup

ASSMANN Electronics, Inc.
1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
©Copyright 2008 by Assmann Electronic Components
All International Rights Reserved