



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN LITE PERSONNEL WITHOUT AUTHORIZATION FROM LITE CORP.

REV.	CON. NO.	DATE	SIGN.	DESCRIPTION

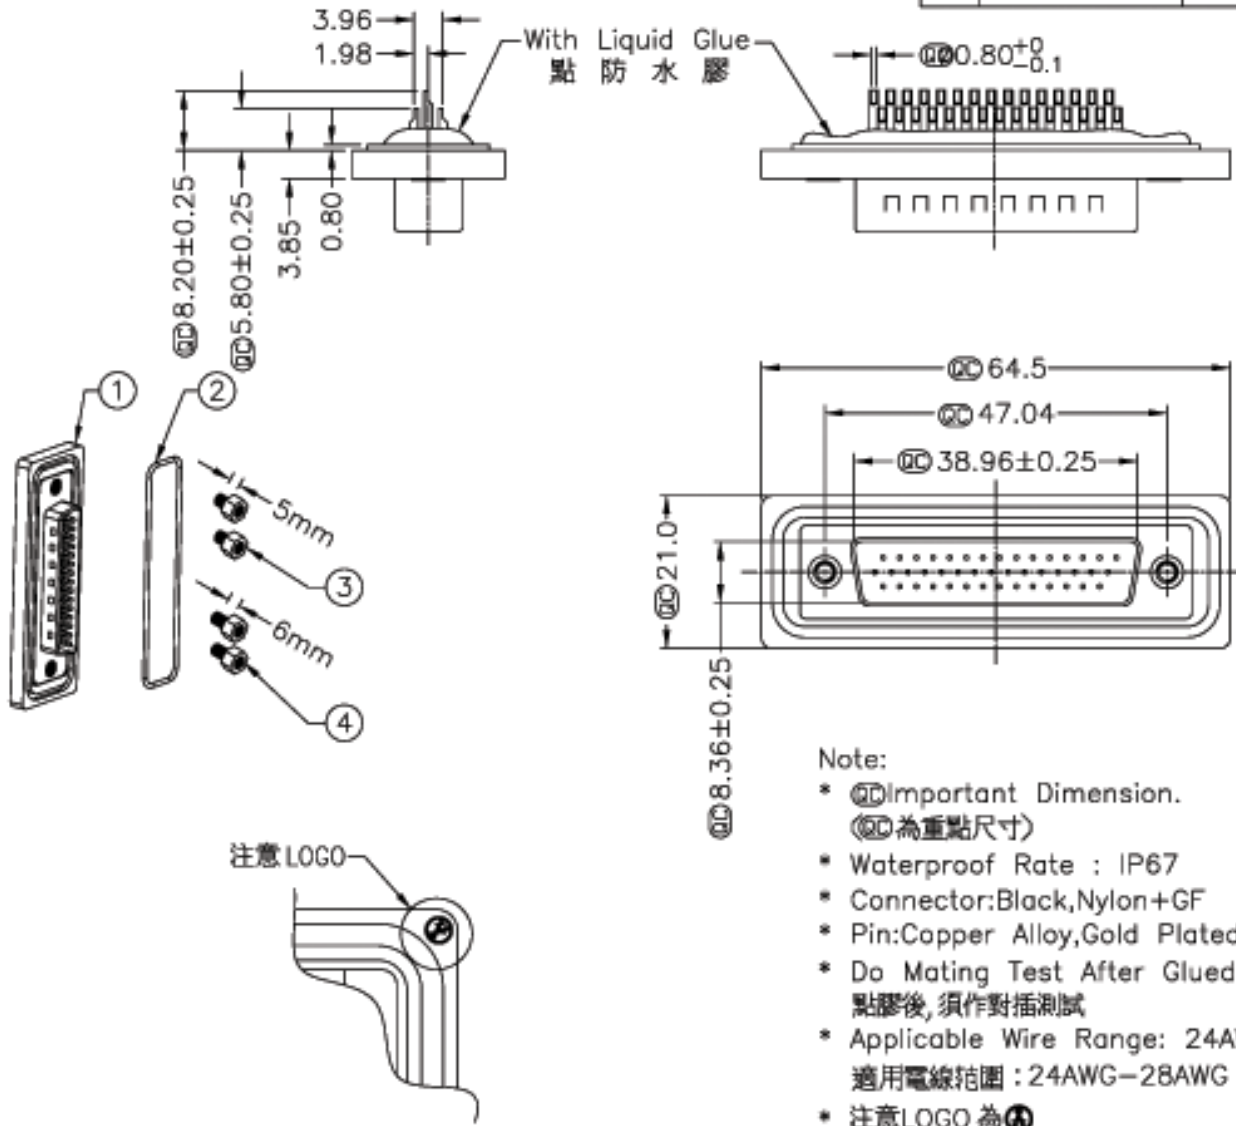

Screw L=5.0 For Panel Thickness Under 1.2mm
適用板厚為 1.2mm 以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm
適用板厚為 1.2~2.0mm

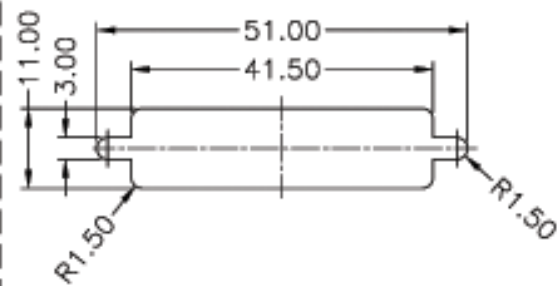

Recommended Panel Cut-Out
建議挖孔尺寸

- Note:
- * $\varnothing$ Important Dimension. ($\varnothing$ 為重點尺寸)
 - * Waterproof Rate : IP67
 - * Connector: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Do Mating Test After Glued
點膠後, 須作對插測試
 - * Applicable Wire Range: 24AWG-28AWG
適用電線範圍: 24AWG-28AWG
 - * 注意LOGO 為 Ⓢ

UNIT:mm				TITLE D-SUB,HD,HD-44PMMS		 Electronic Components		ITEM NO A-HDS-44-LL-WP		DRAWN BY Gao Ling		DATE 2006/05/08	
TOLERANCE								DWG NO A-HDS-44-LL-WP		CHECKED BY Robert Hsu		DATE 2006/05/30	
.X ±0.25		SCALE Free		SHEET 1 OF 1						APPROVED BY Max		DATE 2006/06/02	
.XX ±0.1		REV. 01		SIZE A4				QC inspection item					
.XXX ±0.05													
ANGLES ±1°													
1		2		3		4		5		6		7	
												8 FM-04-19-A2	