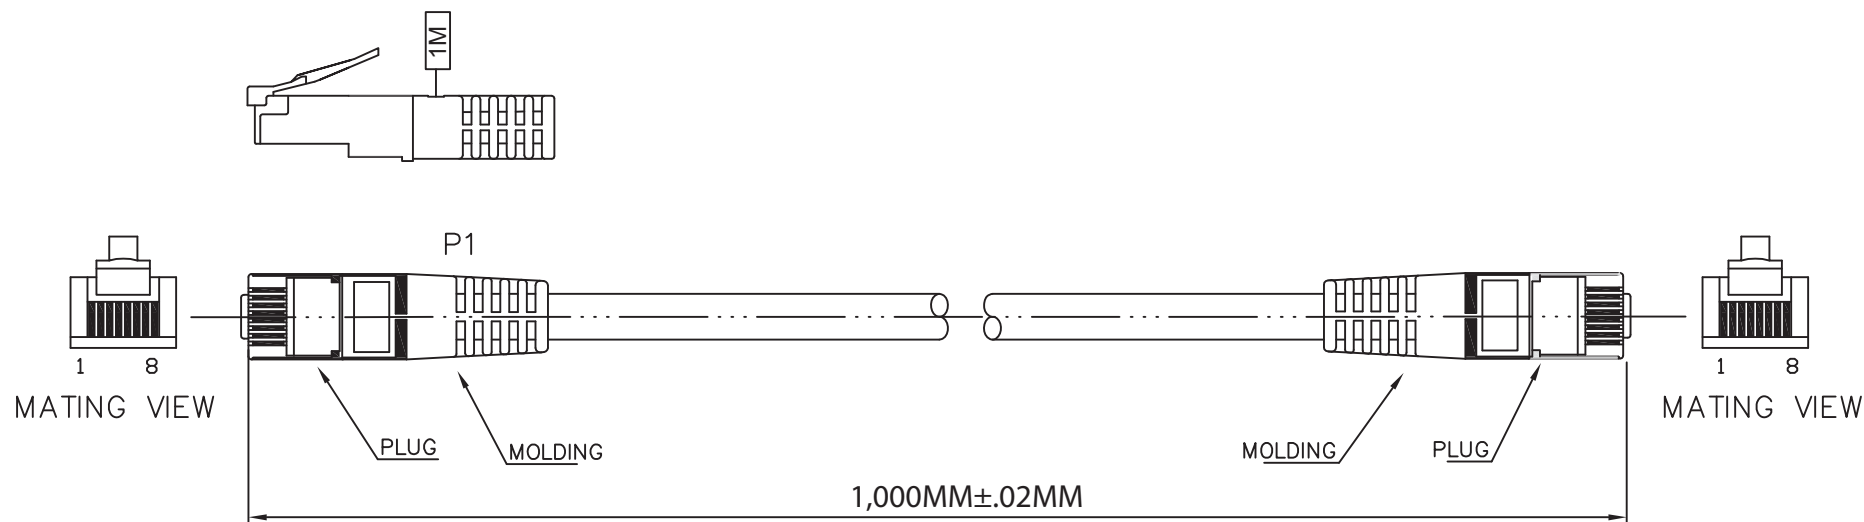


|                          |                        |
|--------------------------|------------------------|
| orange 1<br>white/orange | green 2<br>white/green |
| blue 3<br>white/blue     | brown 4<br>white/brown |

### Material:

- Conductor:
  - Bare Copper 24AWG 7/0.196±0.015MM
- Insulator:
  - Thickness Min. at any point: 0.15MM
  - Thickness Max. Avg.: 0.25MM
  - Diameter: 1.04±0.06MM
- Jacket PVC:
  - Thickness Min. at any point: 0.46MM
  - Thickness Max. Avg.: 0.58MM
  - Diameter: 5.9±0.15MM

| PA/R | PINOUT    |         |           |
|------|-----------|---------|-----------|
|      | P1(T568B) | WIRE    | P2(T568B) |
| 1    | 1         | WHT/ORG | 1         |
|      | 2         | ORG     | 2         |
| 2    | 3         | WHT/GRN | 3         |
|      | 6         | GRN     | 6         |
| 3    | 4         | BLU     | 4         |
|      | 5         | WHT/BLU | 5         |
| 4    | 7         | WHT/BRN | 7         |
|      | 8         | BRN     | 8         |

⊕ = Assmann logo

**RoHS**  
Compliant

ITEM NO.

**A-MCU60010/Y-R**

TITLE

Cat.6 UTP Patch Cable - 8P8C 50μ", Yellow, 1 Meter

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: [info@usa-assmann.com](mailto:info@usa-assmann.com)

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved