


L± 3%

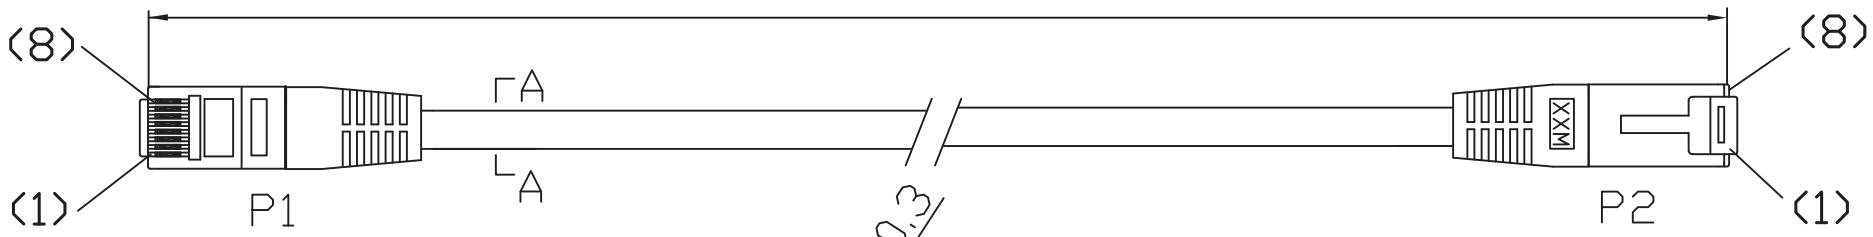


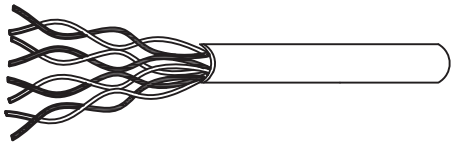

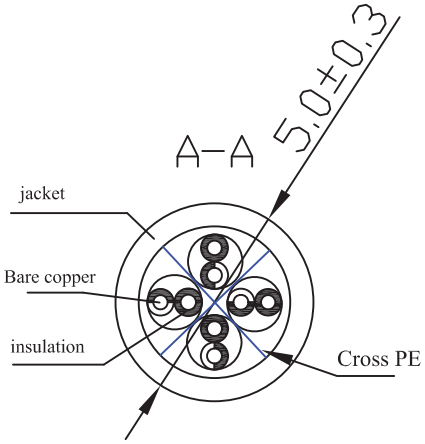

PIN OUT

P1	WIRE COLOR	P2
1	ORANGE/WHITE	1
2	ORANGE	2
3	GREEN/WHITE	3
6	GREEN	6
4	BLUE	4
5	BLUE/WHITE	5
7	BROWN/WHITE	7
8	BROWN	8



Material:

- Conductor: 26AWG 7*0.16±0.015mm
- Conductor Insulation color coding: (1)White/Orange, (1)Orange, (1)White/Green, (1)Green, (1)Blue, (1)White/Blue, (1)White/Brown, (1)Brown
- Included printing on cable jacket: *CM (UL) C(UL) 4P 26AWG UTP CAT.6 PATCH CABLE ISO/IEC & EN & ANSI/TIA-568-C.2*
- Cable Assembly: White cable tie, Wiring T568B color, Plug RJ45 8P8C 3μ pc UL 94V-2
- Cable Jacket color: Red, Yellow, Green or Blue
- Length: L±3%m
- Dielectric strength: 2.5KV dc-2seconds
- Working temperatures: -20°C~60°C

Order Code: A-MCU60**xxx**/**x**-R

Order lengths in meter: 0.5,1,2,3,5,7,10,15,20,30

Order color: Red, Yellow, Green, Blue

Unit: mm

RoHS Compliant

Scale	
TOLERANCE	
X.	±X
X.X	±X
X.XX	±X
DIM	TOL
X.°	±X°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name
①	Update	20.02.13	Wilson

	Date	Name
Drawn	20.02.13	Wilson
Approved	20.02.13	Groll

ASSMANN WSW components

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title: Cat6 UTP Patch cable
26AWG, colored

ASSMANN WSW-No.: A-MCU60xxx/x-R

Drawing-No.:

rev01

Replace

Sheet 1/1