


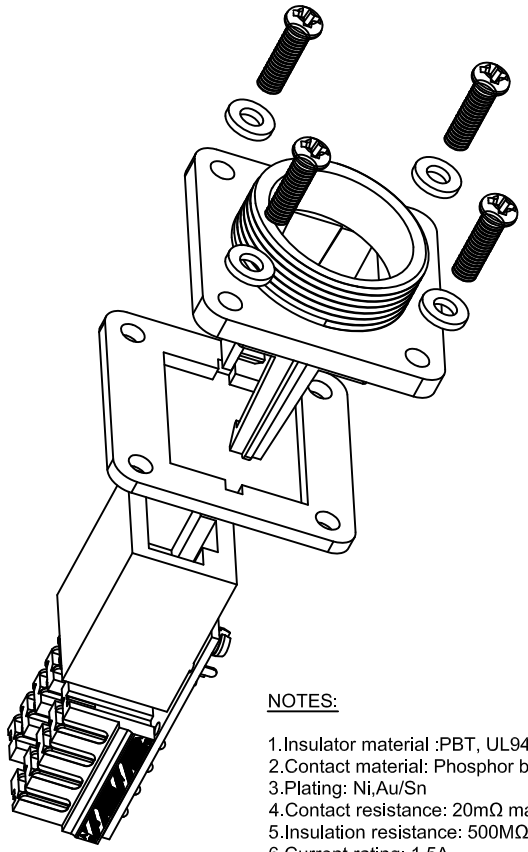


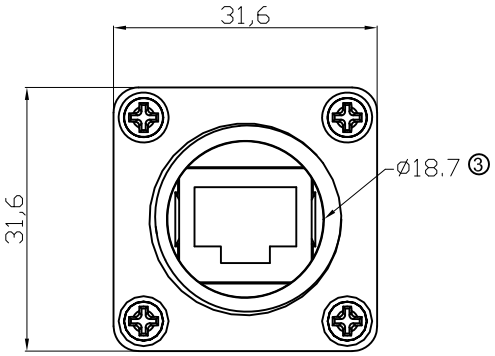

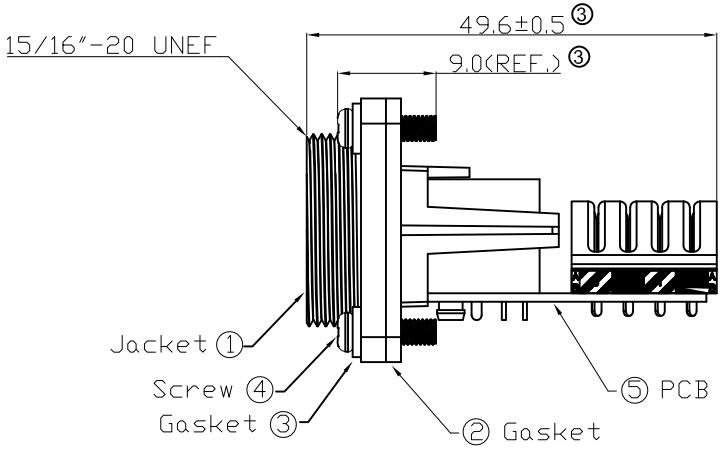


NOTES:

1.Insulator material :PBT, UL94V-0
2.Contact material: Phosphor brozen
3.Plating: Ni,Au/Sn
4.Contact resistance: 20mΩ max
5.Insulation resistance: 500MΩ min
6.Current rating: 1.5A
7.Operating temperature: -40°C to 85°C
8.Operating temperature:125V AC
9.Test voltage :500V AC
10.Waterproof Rate:IP67
11.Packing : Polybag



Recommended Panel Cut-Out

NO.	NAME	COLOR	SPECIFICATION	QTY
7	PE Pag		90x85mm(Sealed)	1
6	Zipper Bag		1#	1
5	PCB			4
4	SCREW		M3xP0.5mm,8L Stainless	4
3	GASKET	BLACK	EPDM	1
2	GASKET	BLACK	EPDM	1
1	JACKET	BLACK	ABS 94V-0	1

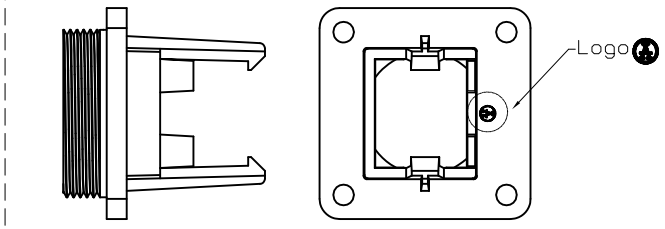

RoHS compliant

Scale	Free
TOLERANCE	
±0.5mm	

Id.	Modification	Date	Name
③	Add dimensions and specification	01.06.2009	Dean
②	Update	13.05.2009	Dean
①	Drawn	27.09.2007	N.Schulz

	Date	Name
Drawn	27.09.2007	N.Schulz
Approved	01.06.2009	Hellwig

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
A-RJ45 KS

Drawing-No.
ASS 2351 CO

rev03

Replace

Sheet