



A

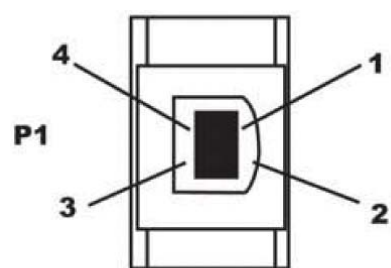

USB B Female



USB A Female




PIN Out

(P1)

(P2)

1	_____	1
2	_____	2
3	_____	3
4	_____	4

Shell _____ Shell

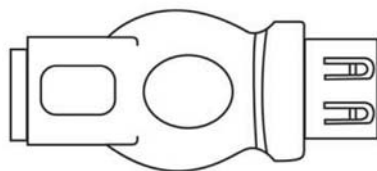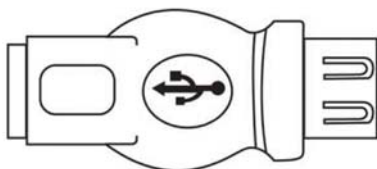

Material:

- Jump Wire: Non-UL 26AWG(7/0.16) Tinned Copper
- Connector:
 - P1: USB B Female Gold Flash Contact, Nickel Plated Shell
 - P2: USB A Female Gold Flash Contact, Nickel Plated Shell
 - Plastic: White
- Hood: Molded Type PVC 45 P
- Color: Beige

Electrical:

- 100% Open, short & miswire test
- Contact Resistance: 3Ω Max.
- Insulation Resistance: 20MΩ Min.

Scale	1:1							Name
TOLERANCE						Drawn	10.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

A-USB-1-R

Title	USB B Female <=> USB A Female Adapter
-------	---------------------------------------

Drawing No.	
-------------	--

rev00

Replace

Sheet

