
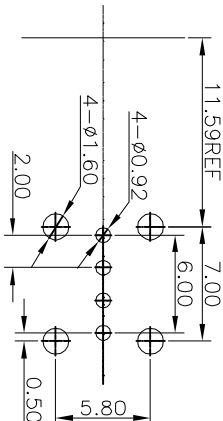
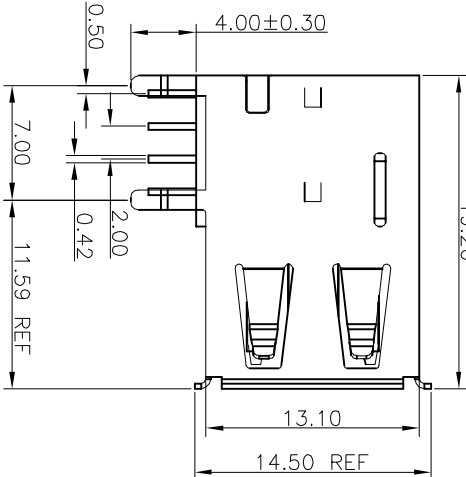
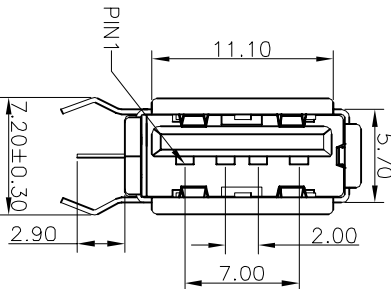


	1	2	3	4	5	6	7																																																																									
A	  RECOMMENDED P.C.B LAYOUT TOLERANCE=±0.05MM NOTES: 1.Material: 1.1 Housing: PBT+30%GF UL94V-0, Color White 1.2 Cover: PBT +30%GF UL94V-0, Color White 1.3 Shell: Brass 1.4 Contact :Phosphor Bronze 2. FINISH: 2.1 Contact Area: Selective 30u"Au Solder Area:Tin Plated Under: Ni Plated 3.MECHANICAL: 3.1 Mating Force:3.57kgf Max. 3.2 Unmating Force:1.02kgf Min 3.3 Durability:1500 cycles Min 4.ELECTRICAL: 4.1 Current Rating:1.5A 4.2 Dielectric Strength:500V AC FOR 1 MINUTE 4.3 Contact Resistance:30mΩ Max 4.4 Insulation Resistance:1000 MΩ Min 5.Operating temperature: -55°C TO +85°C 6.PACKIING: Tray							A																																																																								
B								B																																																																								
C	 							C																																																																								
D								D																																																																								
E								E																																																																								
F								F																																																																								
G	<table><tr><th>Scale</th><th>Free</th><th></th><th></th><th></th><th></th><th></th><th>Customer-No.</th></tr><tr><td colspan="2">TOLERANCE</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>.X</td><td>±0.30</td><td></td><td></td><td></td><td></td><td>Drawn</td><td>Winnie</td></tr><tr><td>.XX</td><td>±0.20</td><td></td><td></td><td></td><td></td><td>Approved</td><td>Winnie</td></tr><tr><td>.XXX</td><td>±0.10</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DIM</td><td>TOL</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>X. °</td><td>±5°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Angle</td><td>TOL</td><td>⊙</td><td>Drawn</td><td></td><td>07.06.2013</td><td>Winnie</td><td></td></tr><tr><td>UNIT</td><td>mm</td><td>Id.</td><td>Modification</td><td>Date</td><td>Name</td><td></td><td></td></tr></table> ASSMANN WSW/ components Drawing-No. ASS 5764 CO rev00 Replace SHEET							Scale	Free						Customer-No.	TOLERANCE								.X	±0.30					Drawn	Winnie	.XX	±0.20					Approved	Winnie	.XXX	±0.10							DIM	TOL							X. °	±5°							Angle	TOL	⊙	Drawn		07.06.2013	Winnie		UNIT	mm	Id.	Modification	Date	Name			G
Scale	Free						Customer-No.																																																																									
TOLERANCE																																																																																
.X	±0.30					Drawn	Winnie																																																																									
.XX	±0.20					Approved	Winnie																																																																									
.XXX	±0.10																																																																															
DIM	TOL																																																																															
X. °	±5°																																																																															
Angle	TOL	⊙	Drawn		07.06.2013	Winnie																																																																										
UNIT	mm	Id.	Modification	Date	Name																																																																											
H	RoHS compliant							H																																																																								
	1	2	3	4	5	6	7																																																																									