


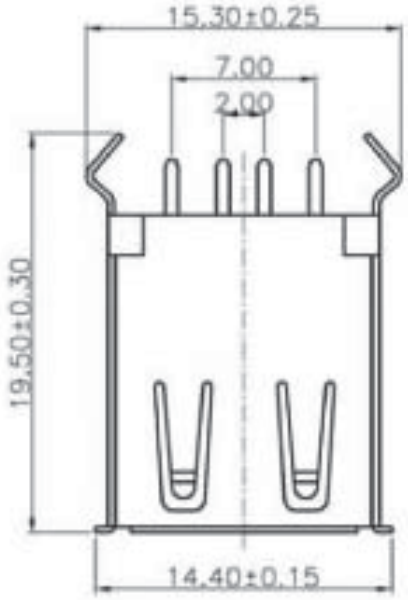


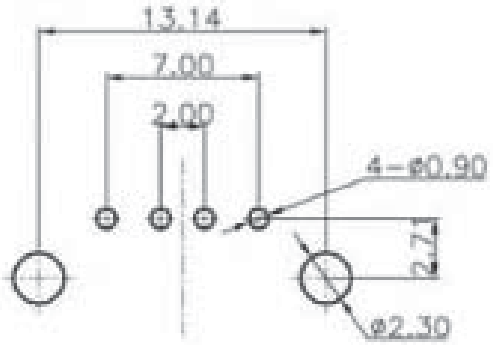

RECOMMENDED PCB LAYOUT

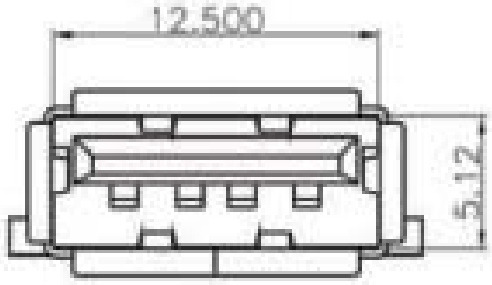

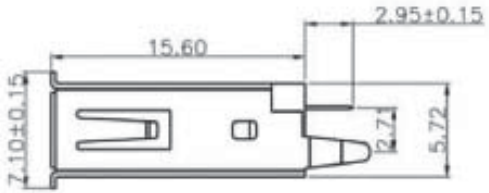

NOTES:

- Insulator: PBT
- Contacts: Phosphorbronze, t=0.25mm
- Shell: Brass t=0.3 / Finish: Nickel Plated
- Withstanding Voltage: 500V AC (1 min)
- Insulation Resistance: 1000M min.
- Rated Voltage and Current: 1.5A at 250V AC min.
- Operating Temperature -55°to + 85°C

Unit: mm

RoHS Compliant

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
DIM	TOL
X.°	±3°
X.X°	±X°
Angle	TOL

Id.	Modification	Date	Name

	Date	Name
Drawn	19.10.11	Chappell
Approved		

ASSMANN WSW components

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title: USB connector -Top Entry
Female, A type

ASSMANN WSW-No.
A-USB-A-TOP (Type A, Version 1.1 5µ" Gold)
A-USB/2-A-TOP (Type A, Version 2.0, 30µ" Gold)

Drawing-No.

rev00

Replace

Sheet 1/1