
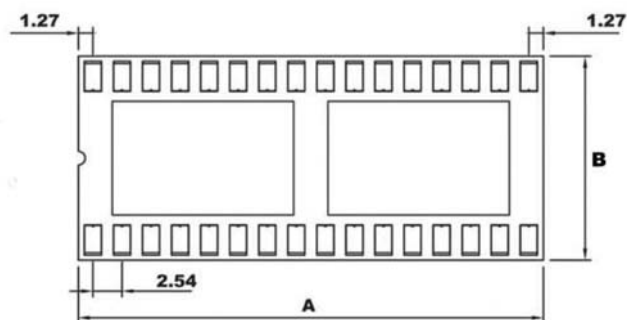
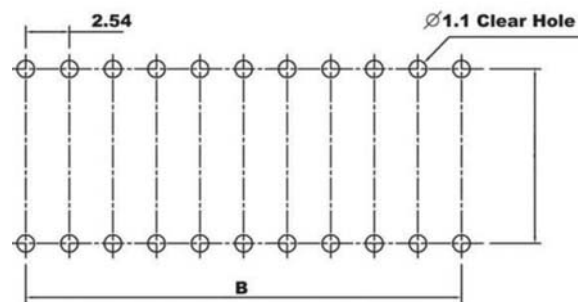


Recommended P.C.B. Layout

No. of Contacts	Qty per Tube	Dimensions		
		A	B	C
06	80	7.62	10.0	7.62
08	60	10.06	9.96	7.62
14	34	17.68	9.96	7.62
16	30	20.22	9.96	7.62
18	26	22.76	9.96	7.62
20	24	22.86	9.96	7.62
22	21	27.80	9.96	7.62
22*	21	27.70	12.62	10.16
24	20	30.38	17.68	15.24
24**	20	30.38	17.68	7.62
28	17	35.46	17.68	15.24
28**	17	35.46	17.68	7.62
32	15	40.50	17.68	15.24
40	12	50.70	17.68	15.24
48	10	61.05	17.84	15.24

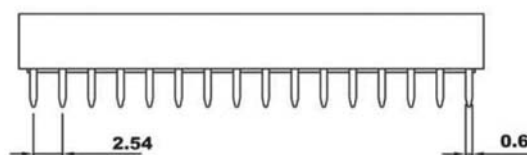

IC Socket 2.54mm(0.100")

Specifications

Contact Resistance: 30 mohms max. at DC 100mA

Insulator Resistance: 1000 megohms min. at DC 500V

Current Rating: 1 Amp

Dielectric Withstanding Voltage: AC 500V for 1 minute

Operating Temperature: -55°~+105°C

Contact:

Housing: PBT & 30% Glass Fiber (UL 94V-0)

Scale	1:1							Name
TOLERANCE						Drawn	11.07.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

Axx-LCG-x-R

Title	Low Cost IC Socket, Gold Version 2.54mm, Straight Leg
--------------	--

Drawing No.

rev00

Replace

	Sheet
--	-------

