
EVEREADY BATTERY CO. 1-800-383-7323 / USA
Internet: www.energizer.com 1-800-383-7323 / CANADA
+ 44 (0) 208 920 2306 / EUROPE

ENERGIZER NO. A23




Typical Dimensions in mm (inches)

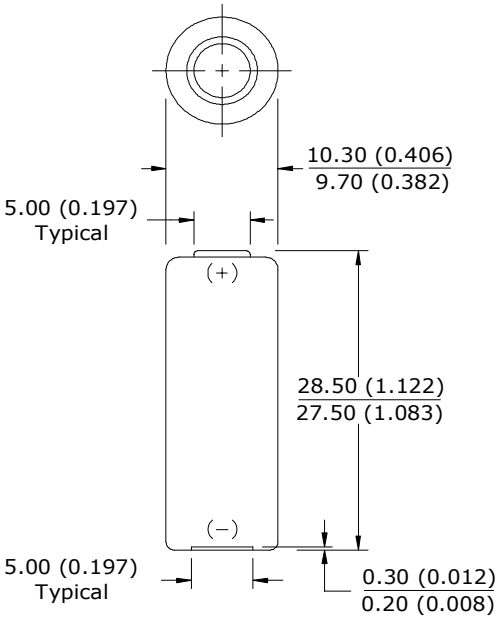

Chemical System: Manganese Dioxide (MnO_2)

Designation: ANSI - 1811A
Battery Voltage: 12 Volts
Average Weight: 7.5 grams (0.26 oz.)
Volume: 2.4 cubic centimeters (0.14 cubic inch)
Average Capacity: 40 mAh to 6.0 volts
(Rated at 20k ohms continuous at 21ºC)
Cell: Eight No. LR932 in series

TYPICAL DISCHARGE CURVE
Simulated Test @ 21ºC (70ºF)

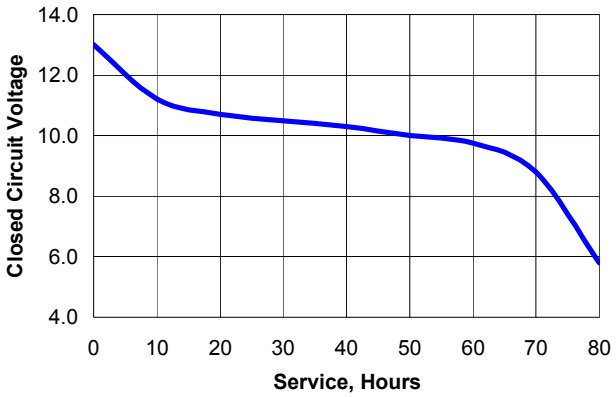

DESIGNED FOR ELECTRONIC APPLICATIONS WHICH MAY REQUIRE HIGH RATE PULSES

Simulated Application Test
Estimated Average Service at 21ºC (70ºF)

Schedule:	Typical Drains at 9.5V (milliamperes)	Load (ohms)	Cutoff Voltage 6.0V
24 hours/day	0.48	20,000	79 Hours

INTERNAL RESISTANCE: Typical closed circuit voltage no less than 10.4 volts on a load of 800 ohms at 21ºC (70ºF) for 0.10 to 2.0 seconds.

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.
Copyright © Eveready Battery Co. Inc. - All Rights Reserved