A33 DONCO CONNECTOR (FEMALE ON WIRE TYPE)

DB LECTRO Inc.

PITCH: 2.54mm



SPECIFICATIONS


Material

Insulator: PBT, glass reinforced, rated UL 94V-0
Contact: Phosphor Bronze

Electrical


Current Rating: 1 Amp
Contact Resistance: 30 mΩ max.
Insulation Resistance: 3000MΩ min.
Dielectric Withstanding Voltage: 500V AC for 1 minute
Operating Temperature: -40℃ to +105℃


- Terminated with 1.27mm pitch flat ribbon cable
- **Mating Suggestion:** A33b & A33 series.

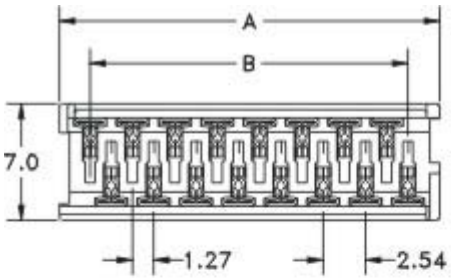




POSITION	A	B
4	7.59	3.81
6	10.13	6.35
8	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.39	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
26	35.53	31.75





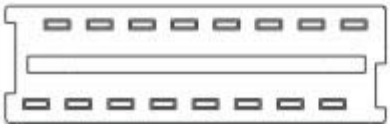

HOW TO ORDER:

A33 - 1 - 2 - 3 - 4

1.NO. OF CONTACT	2.CONTACT MATERIAL	3.CONTACT PLATING	4.INSULATOR COLOR
04 06 18 10 12 14 16 18 20 26	B: PHOSPHOR BRONZE	T: TIN PLATED S: SELECTIVE G: GOLD FLASH A: 5u" INCH GOLD B: 10u" INCH GOLD C: 15u" INCH GOLD D: 30u" INCH GOLD	5. WHITE

3600 boul. Matte suite i Brossard Qc J4Y-2Z2 tel:(450)-444-1424 fax:(450)-444-4714