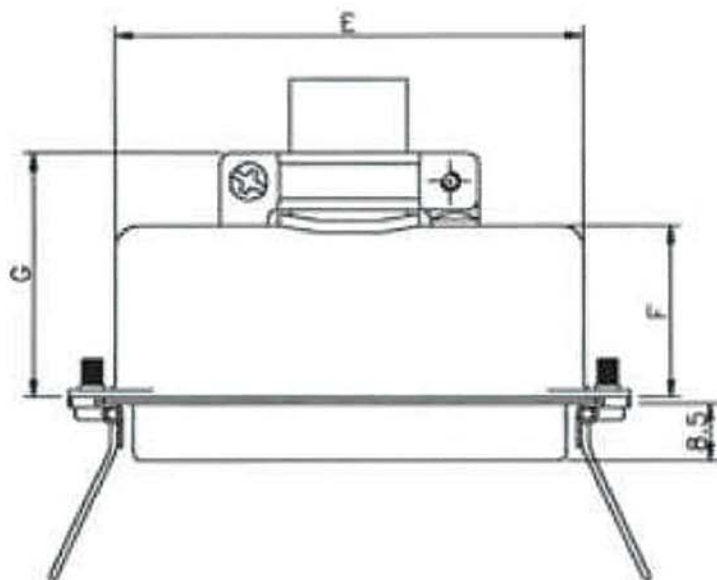


Dimension								
No. of Contacts	A	B	C	D	E	F	G	H
36	36.72	48.90	59.70	67.70	52.80	23.00	33.10	11.5
50	51.84	64.10	74.90	82.80	68.00	25.00	35.50	12.5

Shell

Steel

Contacts

Phosphor bronze

Insulator

PBT glass fibre reinforced
UL94 V-0

Current rating

5A

Withstanding voltage

1000V AC 1 minute

Insulation resistance

1000M Ω min. (500V DC)

Operating temperature

-55°C to +105°C

RoHS
Compliant

ITEM NO

A57/XX-F-B-R

TITLE

Centronics-Connectors, Female, Assembly Type

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 – Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED

© Copyright 2008 by Assmann Electronic Components
All International Rights Reserved