



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

A733

TECHNICAL SPECIFICATIONS OF PNP EPITAXIAL PLANAR TRANSISTOR

Description


Designed for use in driver stage of AF amplifier applications.

Pinning

- 1 = Base
- 2 = Emitter
- 3 = Collector

Absolute Maximum Ratings($T_A=25^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-60	V
Collector-Emitter Voltage	V_{CE0}	-50	V
Emitter-Base Voltage	V_{EB0}	-5	V
Collector Current	I_C	-100	mA
Base Current	I_B	-50	mA
Total Power Dissipation	P_D	200	mW
Junction Temperature	T_J	+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}\text{C}$

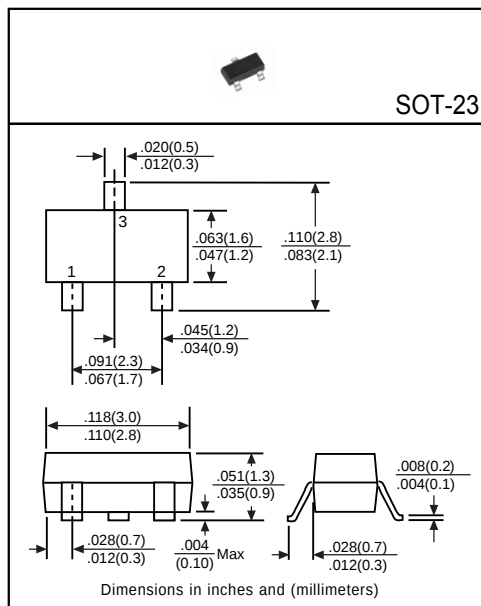

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV_{CB0}	-60	-	-	V	$I_C=-100\mu\text{A}$, $I_E=0$
Collector-Emitter Breakdown Voltage	BV_{CE0}	-50	-	-	V	$I_C=-1\text{mA}$, $I_B=0$
Emitter-Base Breakdown Voltage	BV_{EB0}	-5	-	-	V	$I_E=-10\mu\text{A}$, $I_C=0$
Collector Cutoff Current	I_{CB0}	-	-	-0.1	μA	$V_{CB}=-60\text{V}$, $I_E=0$
Emitter Cutoff Current	I_{EB0}	-	-	-0.1	μA	$V_{EB}=-5\text{V}$, $I_B=0$
Collector-Emitter Saturation Voltage ⁽¹⁾	$V_{CE(sat)}$	-	-0.1	-0.3	V	$I_C=-100\text{mA}$, $I_B=-10\text{mA}$
DC Current Gain ⁽¹⁾	h_{FE1}	50	-	-	-	$I_C=-0.1\text{mA}$, $V_{CE}=-6\text{V}$
	h_{FE2}	135	-	600	-	$I_C=-1\text{mA}$, $V_{CE}=-6\text{V}$
Transition Frequency	f_T	150	-	600	MHz	$I_C=-10\text{mA}$, $V_{CE}=-6\text{V}$, $f=100\text{MHz}$
Output Capacitance	C_{ob}	-	-	4	pF	$V_{CB}=10\text{V}$, $f=1\text{MHz}$, $I_E=0$


(1)Pulse Test: Pulse Width $\leq 380\mu\text{s}$, Duty Cycle $\leq 2\%$

Classification of h_{FE2}


Rank	L	H
Range	130~200	200~400

Electrical Characteristic Curves


Maximum Collector Dissipation Curve

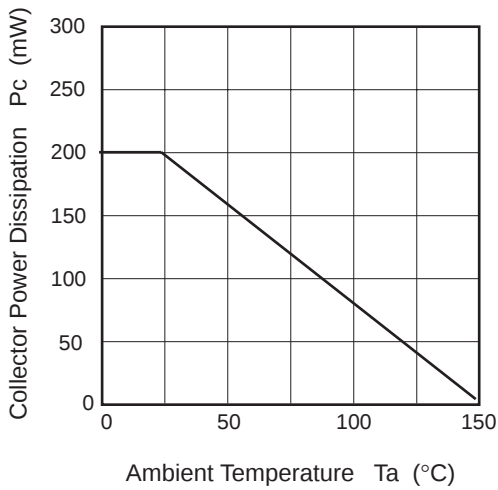

Typical Output Characteristics

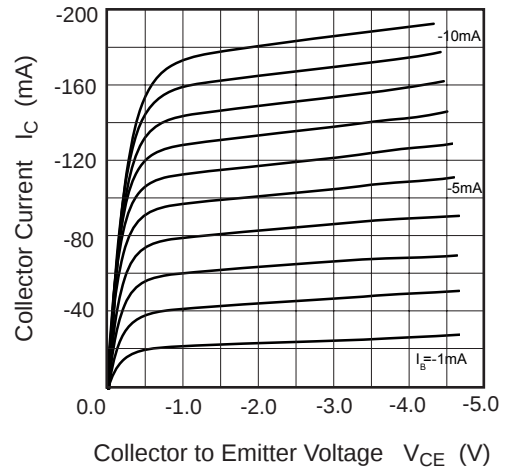

Collector Output Capacitance vs. Collector to Base Voltage

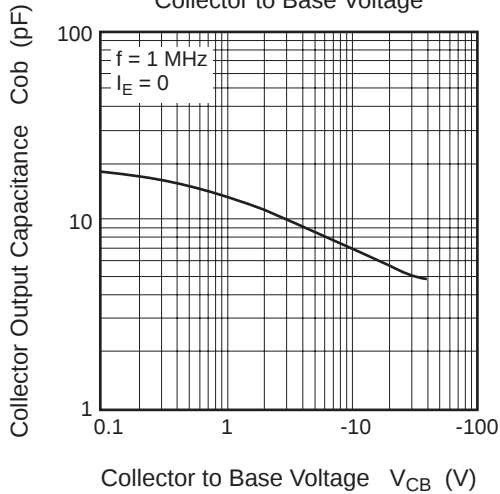

DC Current Transfer Ratio vs. Collector Current

