



DESCRIPTION

Three-terminal negative voltage regulator.

The A79LXX is available in SOT-23 and TO-92 Packages.


FEATURES

- Maximum Output current I_{OM} : 100mA
- Output voltage V_O : -5V/-6V/-8V/-9V/-12V
- Continuous total dissipation
SOT-23 P_D : 0.35W
TO-92 P_D : 0.625W
- Available in SOT-23 and TO-92 Packages

ORDERING INFORMATION

Package Type	Part Number	
SOT-23 SPQ: 3,000pcs/Reel	E3	A79LXXE3R
		A79LXXE3VR
TO-92 A:SPQ: 2,000pcs/Box B:SPQ: 1,000pcs/Bag	Z	A79LXXZA
		A79LXXZVA
		A79LXXZB
		A79LXXZVB
Note	XX: Output Voltage 05=5.0V, 12=12V	
	V: Halogen free Package	
	R: Tape & Reel	
	A: Ammo Pack	
	B: Bulk	
AiT provides all RoHS products		



TYPICAL APPLICATION

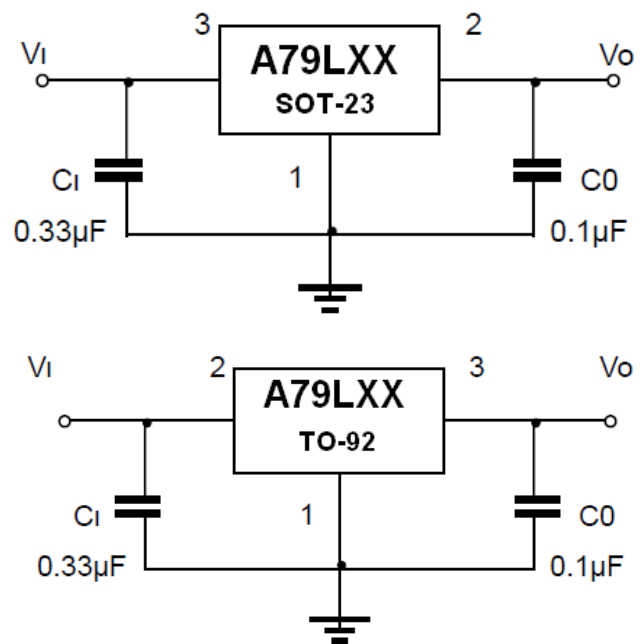

NOTE: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.



PIN DESCRIPTION

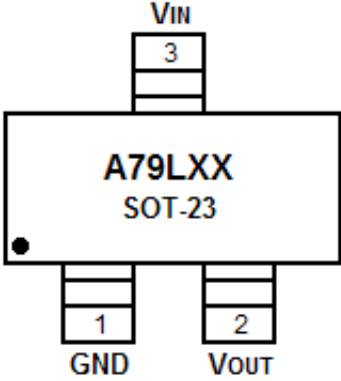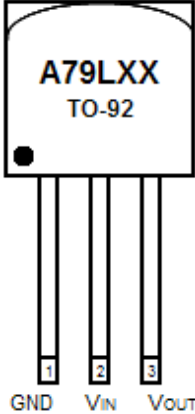 Top View		 Top View	
Pin #		Symbol	Function
SOT-23	TO-92		
3	2	V_{IN}	Input
1	1	GND	Ground
2	3	V_{OUT}	Output



ABSOLUTE MAXIMUM RATINGS

Operating temperature range applies unless otherwise specified

V _I , Input Voltage	79L05~79L09	-30V
	79L12	-35V
T _{OPR} , Operating Junction Temperature Range		0°C ~+125°C
T _{STG} , Storage Temperature Range		-55°C ~ +150°C

Stresses above may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

$V_I = -10V$ (A79L05), $V_I = -11V$ (A79L06), $V_I = -14V$ (A79L08), $V_I = -16V$ (A79L09), $V_I = -19V$ (A79L12),

$I_O = 40mA$, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, unless otherwise specified

Parameter	Symbol	Conditions			Min.	Typ.	Max.	Unit
Output Voltage	V _O		5V	25°C	-4.8	-5.0	-5.2	V
			6V		-5.75	-6.0	-6.3	
			8V		-7.7	-8.0	-8.3	
			9V		-8.64	-9.0	-9.36	
			12V		-11.5	-12	-12.5	
		-7V ≤ V _I ≤ -20V, I _O = 1mA ~ 40mA	5V	0~ 125°C	-4.75	-5.0	-5.25	
		I _O = 1mA ~ 70mA						
		-8V ≤ V _I ≤ -20V, I _O = 1mA ~ 40mA	6V		-5.7	-6.0	-6.3	
		I _O = 1mA ~ 70mA						
		-10.5V ≤ V _I ≤ -23V, I _O = 1mA ~ 40mA	8V		-7.6	-8.0	-8.4	
		I _O = 1mA ~ 70mA						
		-12V ≤ V _I ≤ -24V, I _O = 1mA ~ 40mA	9V		-8.55	-9.0	-9.45	
		I _O = 1mA ~ 70mA						
		-14.5V ≤ V _I ≤ -27V, I _O = 1mA ~ 40mA	12V		-11.4	-12	-12.6	
		I _O = 1mA ~ 70mA						
Load Regulation	ΔV _O	I _O = 1mA ~ 100mA	5V	25°C	-	20	60	mV
			6V			21	80	
			8V			30	100	
			9V			19	90	
			12V			24	100	
			I _O = 1mA ~ 40mA			5V	10	
		6V	11	40				
		8V	15	50				
		9V	11	40				
		12V	15	50				




Parameter	Symbol	Conditions			Min.	Typ.	Max.	Unit	
Line Regulation	ΔV_o	$-7V \leq V_I \leq -20V$	5V	25°C	-	15	150	mV	
		$-8V \leq V_I \leq -20V$				12	100		
		$-8V \leq V_I \leq -20V$	6V			20	175		
		$-9V \leq V_I \leq -20V$				15	125		
		$-10.5V \leq V_I \leq -23V$	8V			42	200		
		$-11V \leq V_I \leq -23V$				36	150		
		$-12V \leq V_I \leq -24V$	9V			45	175		
		$-13V \leq V_I \leq -24V$				40	125		
		$-14.5V \leq V_I \leq -27V$	12V			50	250		
		$-16V \leq V_I \leq -27V$				40	200		
Quiescent Current	I_q		5V	25°C	-	-	6.0	mA	
			6V			3.9			
			8V			4.0			
			9V			4.1			
			12V			-	6.5		
Quiescent Current Change	ΔI_q	$-8V \leq V_I \leq -20V$	5V	0~125°C	-	-	1.5	mA	
		$-9V \leq V_I \leq -20V$	6V						
		$-11V \leq V_I \leq -23V$	8V						
		$-16V \leq V_I \leq -27V$	12V						
		$1mA \leq I_o \leq 40mA$	5V				0.1		
			6V						
			8V						
			9V						
Output Noise Voltage	V_N	$10Hz \leq f \leq 100kHz$	5V	25°C	-	40	-	μV	
			6V			44			
			8V			54			
			9V			58			
			12V			80			
Ripple Rejection	RR	$-8V \leq V_I \leq -18V, f = 120Hz$	5V	0~125°C	41	49	-	dB	
		$-9V \leq V_I \leq -19V, f = 120Hz$	6V		40	48			
		$-11V \leq V_I \leq -21V, f = 120Hz$	8V		37	46			
		$-15V \leq V_I \leq -24V, f = 120Hz$	9V		-	45			
		$-15V \leq V_I \leq -25V, f = 120Hz$	12V		37	42			
Dropout Voltage	V_d				25°C	-	1.7	-	V




TYPICAL CHARACTERISTICS


1.

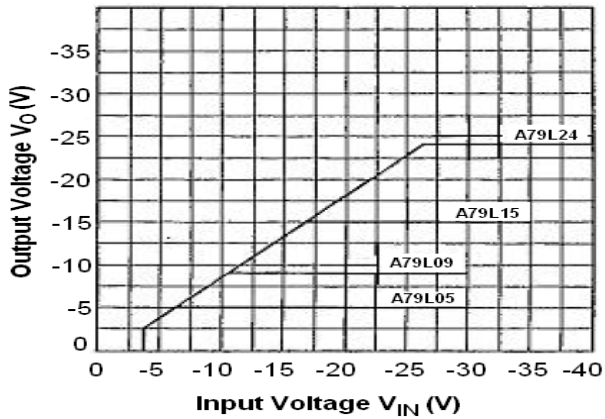


2.

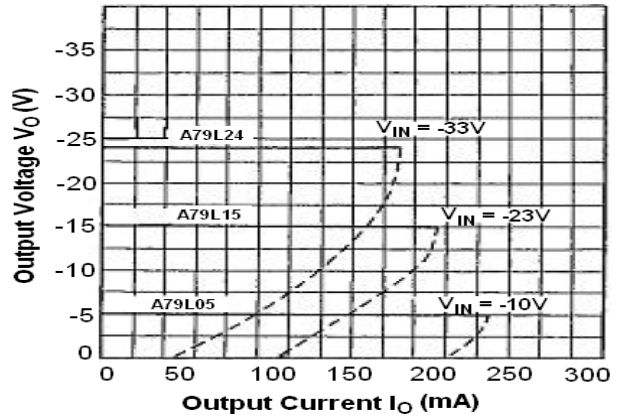


3.

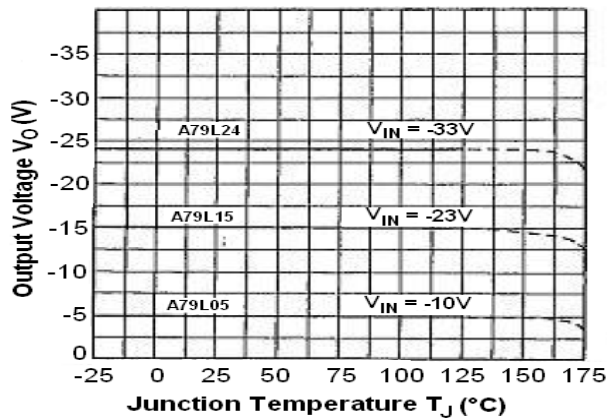


4.

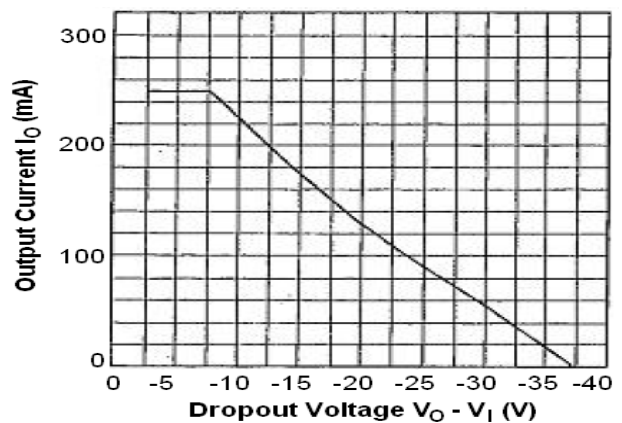

5.

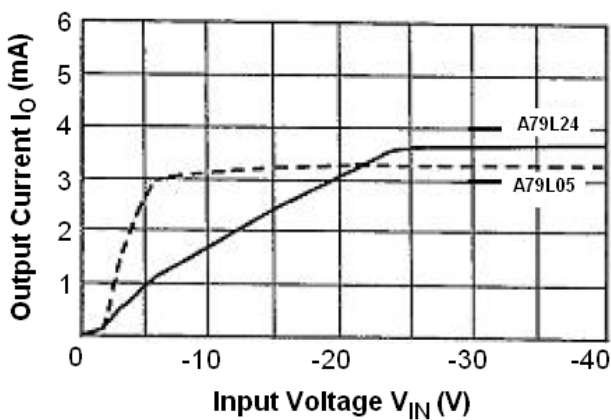


6. $P_D - T_A$ (SOT-23)

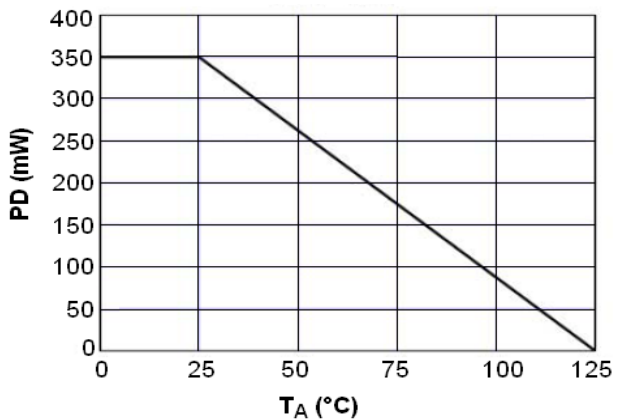




7. $P_D - T_A$ (TO-92)

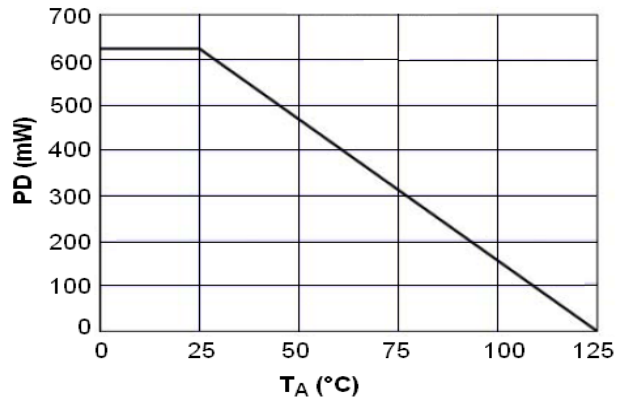



PACKAGE INFORMATION


Dimension in SOT-23 Package (Unit: mm)

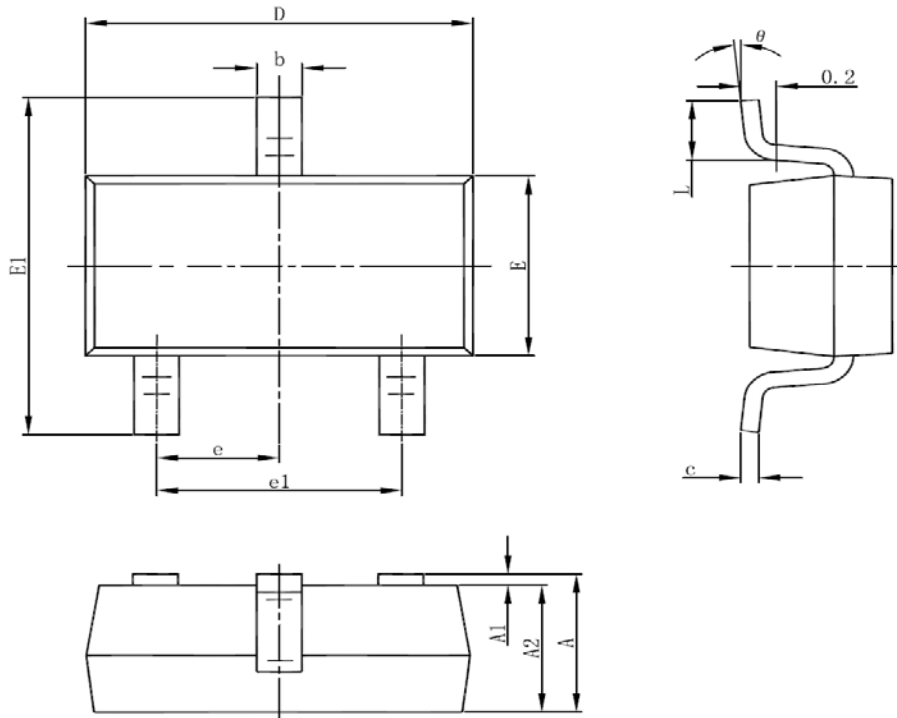

SYMBOL	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950(BSC)	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°



Dimension in TO-92 (Unit: mm)

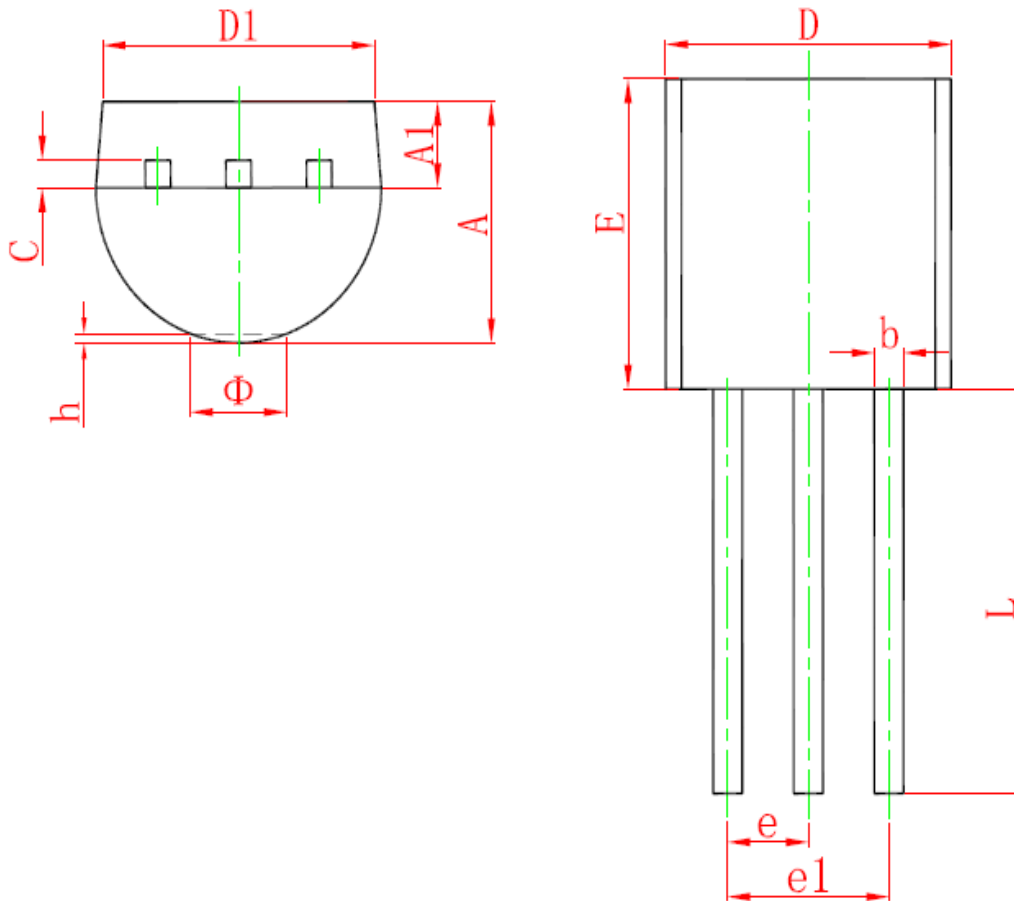

Symbol	Min	Max
A	3.300	3.700
A1	1.100	1.400
b	0.380	0.550
c	0.360	0.510
D	4.400	4.700
D1	3.430	-
E	4.300	4.700
e	1.270 TYP	
e1	2.440	2.640
L	14.100	14.500
Φ	-	1.600
h	0.000	0.380



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.