

MINIATURE CERAMIC SMD CRYSTAL

ABM9



RoHS
Compliant



4.0 x 2.5 x 0.8mm

FEATURES:

- Low in height; suitable for thin equipment.
- Available +/-10ppm stability -10 ~ +60°C
- Tight tolerance and stability available.
- Suitable for RoHS compliant reflow

APPLICATIONS:

- High density applications.
- Modems, communication and test equipment.
- PCMCIA, Wireless applications

STANDARD SPECIFICATIONS:


Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	12.000	-----	32.000*	MHz	*Contact Abracon for availability of F>32MHz
Operation Mode	Fundamental, AT			-----	
Operating Temperature	-10	-----	+60	°C	See options
Storage Temperature	-40	-----	+105	°C	
Frequency Tolerance @+25°C	-50	-----	+50	ppm	See options
Frequency Stability over the Operating Temperature (ref. to +25°C)	-50	-----	+50	ppm	See options
Equivalent series resistance (R1)	See table 1 below			Ω	
Shunt capacitance (C0)	-----	-----	7.0	pF	
Load capacitance (CL)	-----	18.0	-----	pF	See options
Drive Level	-----	10	100	μW	
Aging	-5	-----	+5	ppm	@25°C±3°C, First year
Insulation Resistance	500	-----	-----	MΩ	@ 100Vdc ± 15V

TABLE 1- Standard ESR

Frequency (MHz)	ESR(Ω) max
12.000 -23.999	80
24.000 -32.000	60

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

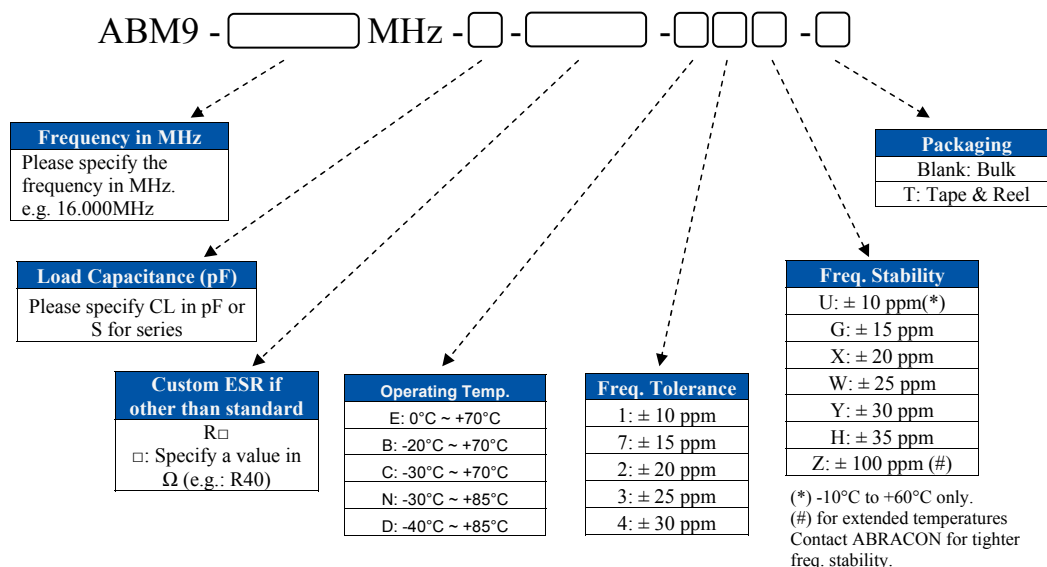

ABRACON IS
ISO 9001: 2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 04.07.11

MINIATURE CERAMIC SMD CRYSTAL

ABM9




RoHS
Compliant




4.0 x 2.5 x 0.8mm

OUTLINE DRAWING:

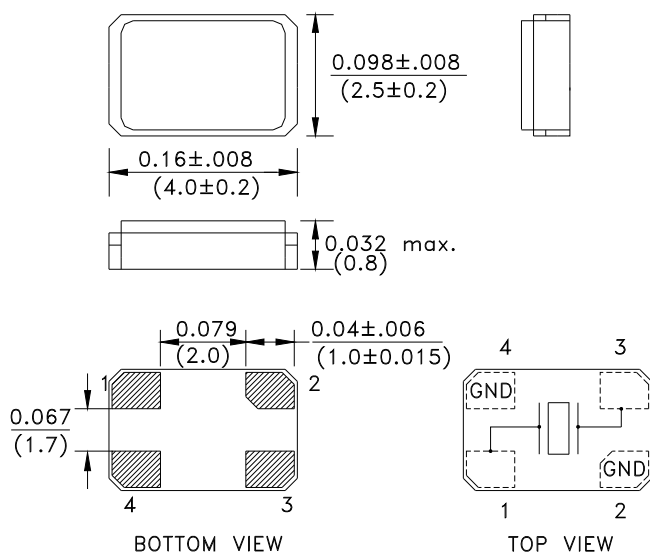


Recommended land pattern

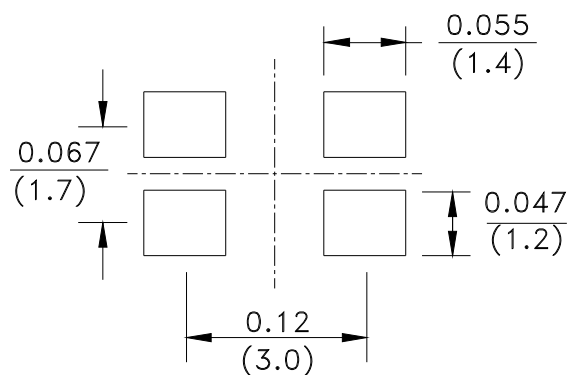


Dimensions: inches (mm)

TAPE & REEL: Tape and reel (1,000pcs)

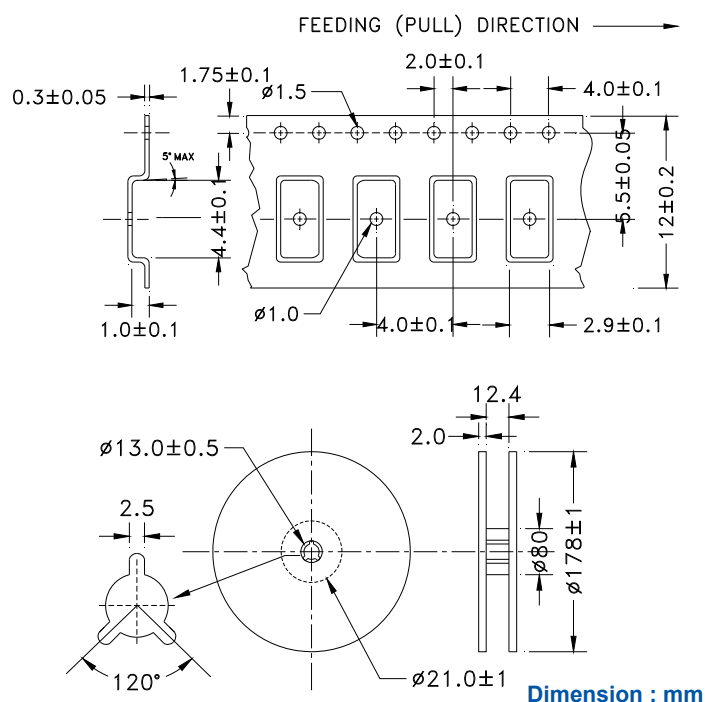

Dimension : mm

REFLOW PROFILE:

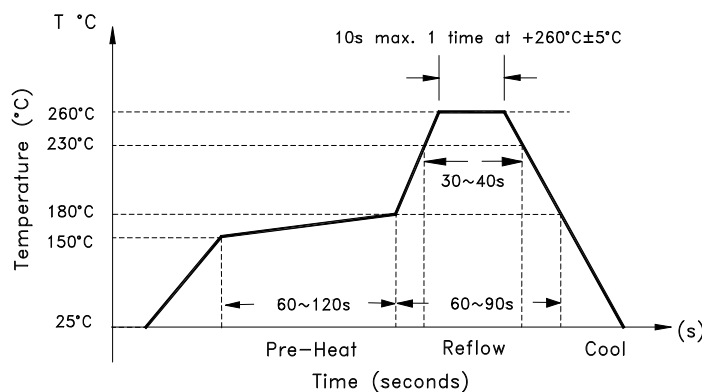

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001: 2008
CERTIFIED



ABRACON
CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8000 | www.abracon.com

Revised: 04.07.11