



ABS2 THRU ABS10


Single Phase 0.8Amp Surface Mount Glass Passivated Bridge Rectifier

Features

- Glass passivated die construction
- Low forward voltage drop
- High current capability
- High surge current capability
- Designed for surface mount application
- Plastic material-UL flammability 94V-O

Mechanical Data

- Case: SOPA-4, molded plastic
- Terminals: plated leads solderable per MIL-STD-202, Method 208
- Polarity: as marked on case
- Mounting position: Any
- Marking: type number

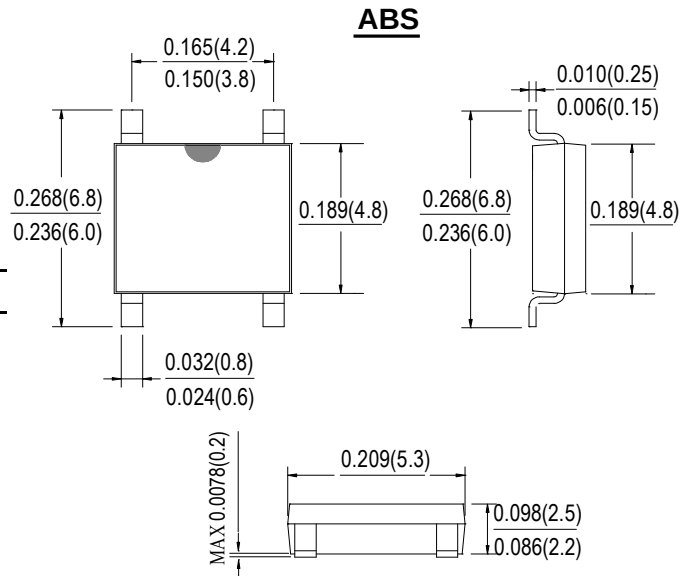

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single Phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	ABS2	ABS4	ABS6	ABS8	ABS10	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RM}	200	400	600	800	1000	V
	V _{RWM}						
	V _{DC}						
RMS Reverse Voltage	V _{RMS}	140	280	420	560	700	V
Average Rectified Output Current (Note 1)@T _A =30℃ (Note 2)@T _A =30℃	I _O	0.5 0.8					A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30					A
Forward Voltage per element @I _F =0.4A	V _{FM}	0.95					V
Peak Reverse Current @T _A =25℃ At Rated DC Blocking Voltage @T _A =125℃	I _R	10.0 500					uA
Typical Thermal Resistance per leg (Note 3)	R _{θJA}	62.5					℃/W
	R _{θJL}	25					
Operating and Storage Temperature Range	T _J , T _{STG}	-55to+150					℃

Note:1. Mounted on glass epoxy PC board with 1.3mm² solder pad.

2. Mounted on aluminum substrate PC board with 1.3mm² solder pad.

3. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.



ABS2 THRU ABS10

Single Phase 0.8Amp Surface Mount Glass Passivated Bridge Rectifier

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

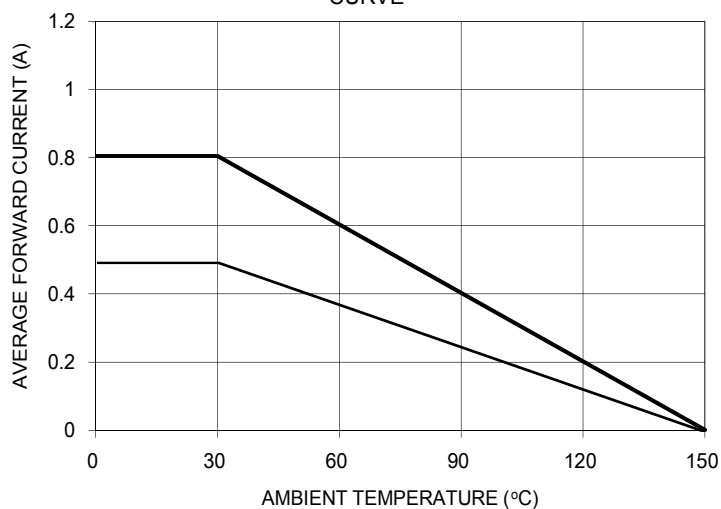


FIG. 2 TYPICAL FORWARD CHARACTERISTIC

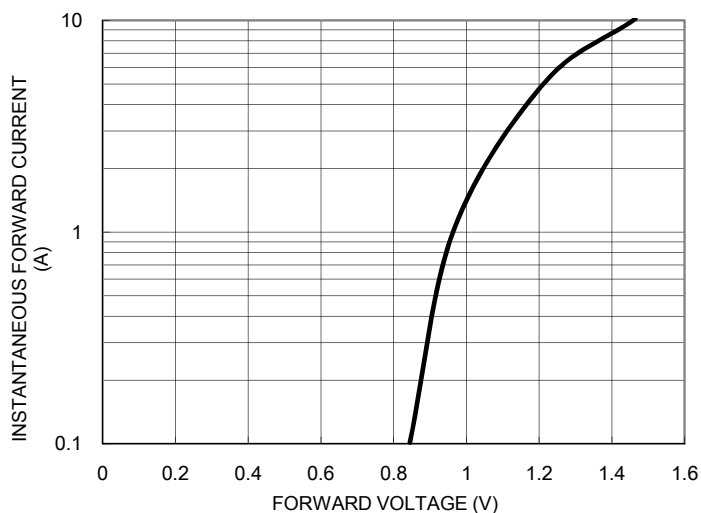


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

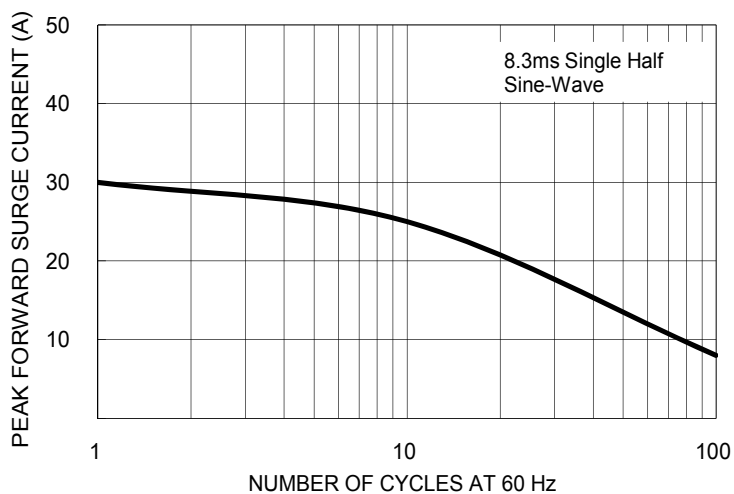


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

