

## FEATURES

**Bandwidth: >400 MHz**  
**Low insertion loss and on resistance: 2.2  $\Omega$  typical**  
**On resistance flatness: 0.3  $\Omega$  typical**  
**Single 3 V/5 V supply operation**  
**Very low distortion: <0.3%**  
**Low quiescent supply current: 1 nA typical**  
**Fast switching times**  
 $t_{ON} = 6 \text{ ns}$   
 $t_{OFF} = 3 \text{ ns}$   
**TTL-/CMOS-compatible**  
**Pb-free packages**  
**16-lead QSSOP**  
**16-lead 3 mm  $\times$  3 mm body LFCSP**

## GENERAL DESCRIPTION

The **ADG774A** is a monolithic CMOS device comprising four 2:1 multiplexer/demultiplexers with high impedance outputs. The CMOS process provides low power dissipation yet offers high switching speed and low on resistance. The on resistance variation is typically less than 0.5  $\Omega$  over the input signal range.

The bandwidth of the **ADG774A** is typically 400 MHz and this, coupled with low distortion (typically 0.3%), makes the part suitable for switching of high speed data signals.

The on resistance profile is very flat over the full analog input range ensuring excellent linearity and low distortion. CMOS construction ensures ultralow power dissipation.

The **ADG774A** operates from a single 3.3 V/5 V supply and is TTL logic-compatible. The control logic for each switch is shown in the truth table (see Table 5).

## FUNCTIONAL BLOCK DIAGRAM

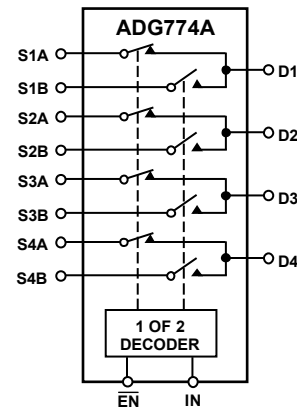


Figure 1.

02373-001

These switches conduct equally well in both directions when on. In the off condition, signal levels up to the supplies are blocked. The **ADG774A** switches exhibit break-before-make switching action.

## PRODUCT HIGHLIGHTS

1. Wide bandwidth data rates of >400 MHz.
2. Ultralow power dissipation.
3. Low leakage over temperature.
4. Break-before-make switching prevents channel shorting when the switches are configured as a multiplexer.
5. Crosstalk is typically -70 dB @ 10 MHz.
6. Off isolation is typically -65 dB @ 10 MHz.
7. Available in compact 3 mm  $\times$  3 mm LFCSP.

## TABLE OF CONTENTS

|                                |   |                                                    |    |
|--------------------------------|---|----------------------------------------------------|----|
| Features .....                 | 1 | ESD Caution.....                                   | 5  |
| Functional Block Diagram ..... | 1 | Pin Configurations and Function Descriptions ..... | 6  |
| General Description .....      | 1 | Typical Performance Characteristics .....          | 7  |
| Product Highlights .....       | 1 | Test Circuits.....                                 | 9  |
| Revision History .....         | 2 | Terminology .....                                  | 11 |
| Specifications.....            | 3 | Application Circuits .....                         | 12 |
| Single Supply .....            | 3 | Outline Dimensions .....                           | 13 |
| Absolute Maximum Ratings.....  | 5 | Ordering Guide .....                               | 13 |

## REVISION HISTORY

### 4/16—Rev. B to Rev. C

|                                      |            |
|--------------------------------------|------------|
| Changed CP-16-3 to CP-16-27 .....    | Throughout |
| Changes to Figure 3 and Table 4..... | 6          |
| Updated Outline Dimensions .....     | 13         |
| Changes to Ordering Guide .....      | 13         |

### 8/06—Rev. A to Rev. B

|                                  |           |
|----------------------------------|-----------|
| Updated Format.....              | Universal |
| Added LFCSP Model.....           | Universal |
| Added Lead-Free Models .....     | Universal |
| Changes to Table 3.....          | 5         |
| Updated Outline Dimensions ..... | 13        |
| Changes to Ordering Guide .....  | 13        |

### 4/03—Rev. 0 to Rev. A

|                                  |   |
|----------------------------------|---|
| Changes to TPCs 9–11 .....       | 5 |
| Updated Outline Dimensions ..... | 8 |

### 7/01—Revision 0: Initial Version

## SPECIFICATIONS

## SINGLE SUPPLY

$V_{DD} = 5\text{ V} \pm 10\%$ ,  $GND = 0\text{ V}$ , all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.<sup>1</sup>

Table 1.

| Parameter                                             | B Version   |                        | Unit                                   | Test Conditions/Comments                                                                         |
|-------------------------------------------------------|-------------|------------------------|----------------------------------------|--------------------------------------------------------------------------------------------------|
|                                                       | 25°C        | $T_{MIN}$ to $T_{MAX}$ |                                        |                                                                                                  |
| ANALOG SWITCH                                         |             |                        |                                        |                                                                                                  |
| Analog Signal Range                                   |             | 0 to 2.5               | V                                      |                                                                                                  |
| On Resistance, $R_{ON}$                               | 2.2         |                        | $\Omega$ typ                           | $V_D = 0\text{ V}$ to $1\text{ V}$ , $I_S = -10\text{ mA}$                                       |
|                                                       | 3.5         | 4                      | $\Omega$ max                           |                                                                                                  |
| On Resistance Match Between Channels, $\Delta R_{ON}$ | 0.15        |                        | $\Omega$ typ                           | $V_D = 0\text{ V}$ to $1\text{ V}$ , $I_S = -10\text{ mA}$                                       |
|                                                       |             | 0.5                    | $\Omega$ max                           |                                                                                                  |
| On Resistance Flatness, $R_{FLAT(ON)}$                | 0.3         |                        | $\Omega$ typ                           | $V_D = 0\text{ V}$ to $1\text{ V}$ , $I_S = -10\text{ mA}$                                       |
|                                                       |             | 0.6                    | $\Omega$ max                           |                                                                                                  |
| LEAKAGE CURRENTS                                      |             |                        |                                        |                                                                                                  |
| Source Off Leakage, $I_S$ (OFF)                       | $\pm 0.001$ |                        | nA typ                                 | $V_D = 3\text{ V}/1\text{ V}$ , $V_S = 1\text{ V}/3\text{ V}$ , see Figure 17                    |
|                                                       | $\pm 0.1$   | $\pm 0.25$             | nA max                                 |                                                                                                  |
| Drain Off Leakage, $I_D$ (OFF)                        | $\pm 0.001$ |                        | nA typ                                 | $V_D = 3\text{ V}/1\text{ V}$ , $V_S = 1\text{ V}/3\text{ V}$ , see Figure 17                    |
|                                                       | $\pm 0.1$   | $\pm 0.25$             | nA max                                 |                                                                                                  |
| Channel On Leakage, $I_D$ , $I_S$ (ON)                | $\pm 0.001$ |                        | nA typ                                 | $V_D = V_S = 3\text{ V}/1\text{ V}$ , see Figure 18                                              |
|                                                       | $\pm 0.1$   | $\pm 0.25$             | nA max                                 |                                                                                                  |
| DIGITAL INPUTS                                        |             |                        |                                        |                                                                                                  |
| Input High Voltage, $V_{INH}$                         |             | 2.4                    | V min                                  |                                                                                                  |
| Input Low Voltage, $V_{INL}$                          |             | 0.8                    | V max                                  |                                                                                                  |
| Input Current                                         |             |                        |                                        |                                                                                                  |
| $I_{INL}$ or $I_{INH}$                                | 0.001       |                        | $\mu\text{A}$ typ                      | $V_{IN} = V_{INL}$ or $V_{INH}$                                                                  |
|                                                       |             | $\pm 0.1$              | $\mu\text{A}$ max                      |                                                                                                  |
| Digital Input Capacitance, $C_{IN}$                   |             | 3                      | pF typ                                 |                                                                                                  |
| DYNAMIC CHARACTERISTICS <sup>2</sup>                  |             |                        |                                        |                                                                                                  |
| $t_{ON}$ , $t_{ON}(\overline{EN})$                    | 6           |                        | ns typ                                 | $C_L = 35\text{ pF}$ , $R_L = 50\text{ }\Omega$ , $V_S = 2\text{ V}$ , see Figure 22             |
|                                                       | 12          |                        | ns max                                 |                                                                                                  |
| $t_{OFF}$ , $t_{OFF}(\overline{EN})$                  | 3           |                        | ns typ                                 | $C_L = 35\text{ pF}$ , $R_L = 50\text{ }\Omega$ , $V_S = 2\text{ V}$ , see Figure 22             |
|                                                       | 6           |                        | ns max                                 |                                                                                                  |
| Break-Before-Make Time Delay, $t_D$                   | 3           |                        | ns typ                                 | $C_L = 35\text{ pF}$ , $R_L = 50\text{ }\Omega$ , $V_{S1} = V_{S2} = 2\text{ V}$ , see Figure 23 |
|                                                       | 1           |                        | ns min                                 |                                                                                                  |
| Off Isolation                                         | -65         |                        | dB typ                                 | $f = 10\text{ MHz}$ , $R_L = 50\text{ }\Omega$ , see Figure 20                                   |
| Channel-to-Channel Crosstalk                          | -70         |                        | dB typ                                 | $f = 10\text{ MHz}$ , $R_L = 50\text{ }\Omega$ , see Figure 21                                   |
| Bandwidth -3 dB                                       | 400         |                        | MHz typ                                | $R_L = 50\text{ }\Omega$ , see Figure 19                                                         |
| Distortion                                            | 0.3         |                        | % typ                                  | $R_L = 100\text{ }\Omega$                                                                        |
| Charge Injection                                      | 6           |                        | pC typ                                 | $C_L = 1\text{ nF}$ , see Figure 24, $V_S = 0\text{ V}$                                          |
| $C_S$ (OFF)                                           | 5           |                        | pF typ                                 |                                                                                                  |
| $C_D$ (OFF)                                           | 7.5         |                        | pF typ                                 |                                                                                                  |
| $C_D$ , $C_S$ (ON)                                    | 12          |                        | pF typ                                 |                                                                                                  |
| POWER REQUIREMENTS                                    |             |                        |                                        | $V_{DD} = 5.5\text{ V}$<br>Digital inputs = 0 V or $V_{DD}$                                      |
| $I_{DD}$                                              | 0.001       | 1                      | $\mu\text{A}$ max<br>$\mu\text{A}$ typ |                                                                                                  |

<sup>1</sup> Temperature range for B version is  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ .

<sup>2</sup> Guaranteed by design, not subject to production test.

$V_{DD} = 3\text{ V} \pm 10\%$ ,  $GND = 0\text{ V}$ , all specifications  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.<sup>1</sup>

Table 2.

| Parameter                                                      | B Version |                                      | Unit    | Test Conditions/Comments                                                                                |
|----------------------------------------------------------------|-----------|--------------------------------------|---------|---------------------------------------------------------------------------------------------------------|
|                                                                | 25°C      | T <sub>MIN</sub> to T <sub>MAX</sub> |         |                                                                                                         |
| ANALOG SWITCH                                                  |           |                                      |         |                                                                                                         |
| Analog Signal Range                                            |           | 0 to 1.5                             | V       |                                                                                                         |
| On Resistance, R <sub>ON</sub>                                 | 4         |                                      | Ω typ   | V <sub>D</sub> = 0 V to 1 V; I <sub>S</sub> = −10 mA                                                    |
|                                                                | 6         | 7                                    | Ω max   |                                                                                                         |
| On Resistance Match Between Channels, ΔR <sub>ON</sub>         | 0.15      |                                      | Ω typ   | V <sub>D</sub> = 0 V to 1 V, I <sub>S</sub> = −10 mA                                                    |
|                                                                |           | 0.5                                  | Ω max   |                                                                                                         |
| On Resistance Flatness, R <sub>FLAT(ON)</sub>                  | 1.5       |                                      | Ω typ   | V <sub>D</sub> = 0 V to 1 V, I <sub>S</sub> = −10 mA                                                    |
|                                                                |           | 3                                    | Ω max   |                                                                                                         |
| LEAKAGE CURRENTS                                               |           |                                      |         |                                                                                                         |
| Source Off Leakage, I <sub>S</sub> (OFF)                       | ±0.001    |                                      | nA typ  | V <sub>D</sub> = 2 V/1 V, V <sub>S</sub> = 1 V/2 V, see Figure 17                                       |
|                                                                | ±0.1      | ±0.25                                | nA max  |                                                                                                         |
| Drain Off Leakage, I <sub>D</sub> (OFF)                        | ±0.001    |                                      | nA typ  | V <sub>D</sub> = 2 V/1 V, V <sub>S</sub> = 1 V/2 V, see Figure 17                                       |
|                                                                | ±0.1      | ±0.25                                | nA max  |                                                                                                         |
| Channel On Leakage, I <sub>D</sub> , I <sub>S</sub> (ON)       | ±0.001    |                                      | nA typ  | V <sub>D</sub> = V <sub>S</sub> = 2 V/1 V, see Figure 18                                                |
|                                                                | ±0.1      | ±0.25                                | nA max  |                                                                                                         |
| DIGITAL INPUTS                                                 |           |                                      |         |                                                                                                         |
| Input High Voltage, V <sub>INH</sub>                           |           | 2.0                                  | V min   |                                                                                                         |
| Input Low Voltage, V <sub>INL</sub>                            |           | 0.4                                  | V max   |                                                                                                         |
| Input Current                                                  |           |                                      |         |                                                                                                         |
| I <sub>INL</sub> or I <sub>INH</sub>                           | 0.001     |                                      | μA typ  | V <sub>IN</sub> = V <sub>INL</sub> or V <sub>INH</sub>                                                  |
|                                                                |           | ±0.1                                 | μA max  |                                                                                                         |
| Digital Input Capacitance, C <sub>IN</sub>                     |           | 3                                    | pF typ  |                                                                                                         |
| DYNAMIC CHARACTERISTICS <sup>2</sup>                           |           |                                      |         |                                                                                                         |
| t <sub>ON</sub> , t <sub>ON</sub> ( $\overline{\text{EN}}$ )   |           | 7                                    | ns typ  | C <sub>L</sub> = 35 pF, R <sub>L</sub> = 50 Ω, V <sub>S</sub> = 1.5 V, see Figure 22                    |
|                                                                |           | 14                                   | ns max  |                                                                                                         |
| t <sub>OFF</sub> , t <sub>OFF</sub> ( $\overline{\text{EN}}$ ) |           | 4                                    | ns typ  | C <sub>L</sub> = 35 pF, R <sub>L</sub> = 50 Ω, V <sub>S</sub> = 1.5 V, see Figure 22                    |
|                                                                |           | 8                                    | ns max  |                                                                                                         |
| Break-Before-Make Time Delay, t <sub>D</sub>                   |           | 3                                    | ns typ  | C <sub>L</sub> = 35 pF, R <sub>L</sub> = 50 Ω, V <sub>S1</sub> = V <sub>S2</sub> = 1.5 V, see Figure 23 |
|                                                                |           | 1                                    | ns min  |                                                                                                         |
| Off Isolation                                                  |           | −65                                  | dB typ  | f = 10 MHz, R <sub>L</sub> = 50 Ω                                                                       |
| Channel-to-Channel Crosstalk                                   |           | −70                                  | dB typ  | f = 10 MHz, R <sub>L</sub> = 50 Ω, see Figure 21                                                        |
| Bandwidth −3 dB                                                |           | 400                                  | MHz typ | R <sub>L</sub> = 50 Ω, see Figure 19                                                                    |
| Distortion                                                     |           | 1.5                                  | % typ   | R <sub>L</sub> = 100 Ω                                                                                  |
| Charge Injection                                               |           | 4                                    | pC typ  | C <sub>L</sub> = 1 nF, see Figure 24, V <sub>S</sub> = 0 V                                              |
| C <sub>S</sub> (OFF)                                           |           | 5                                    | pF typ  |                                                                                                         |
| C <sub>D</sub> (OFF)                                           |           | 7.5                                  | pF typ  |                                                                                                         |
| C <sub>D</sub> , C <sub>S</sub> (ON)                           |           | 12                                   | pF typ  |                                                                                                         |
| POWER REQUIREMENTS                                             |           |                                      |         |                                                                                                         |
|                                                                |           |                                      |         | V <sub>DD</sub> = 3.3 V                                                                                 |
| I <sub>DD</sub>                                                |           | 1                                    | μA max  | Digital inputs = 0 V or V <sub>DD</sub>                                                                 |
|                                                                | 0.001     |                                      | μA typ  |                                                                                                         |

<sup>1</sup> Temperature range for B version is  $-40^\circ\text{C}$  to  $+85^\circ\text{C}$ .

<sup>2</sup> Guaranteed by design, not subject to production test.

## ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ , unless otherwise noted.

Table 3.

| Parameters                          | Rating                                                      |
|-------------------------------------|-------------------------------------------------------------|
| $V_{DD}$ to GND                     | –0.3 V to +6 V                                              |
| Analog, Digital Inputs <sup>1</sup> | –0.3 V to $V_{DD} + 0.3$ V or 30 mA, whichever occurs first |
| Continuous Current, S or D          | 100 mA                                                      |
| Peak Current, S or D                | 300 mA (pulsed at 1 ms, 10% duty cycle max)                 |
| Operating Temperature Range         |                                                             |
| Industrial (B Version)              | –40°C to +85°C                                              |
| Storage Temperature Range           | –65°C to +150°C                                             |
| Junction Temperature                | 150°C                                                       |
| Thermal Impedance, $\theta_{JA}$    |                                                             |
| 16-Lead QSSOP                       | 105.44°C/W <sup>2</sup>                                     |
| 16-Lead LFCSP (3 mm × 3 mm)         | 48.7°C/W <sup>2</sup>                                       |
| Lead Temperature Soldering          |                                                             |
| Vapor Phase (60 sec)                | 215°C                                                       |
| Infrared (15 sec)                   | 220°C                                                       |
| Reflow Soldering (Pb-free)          |                                                             |
| Peak Temperature                    | 260°C (+0°C/–5°C)                                           |
| Time at Peak Temperature            | 10 sec to 40 sec                                            |

<sup>1</sup> Overvoltages at IN, S, or D are clamped by internal diodes. Current should be limited to the maximum ratings given.

<sup>2</sup> Measured with the device soldered on a four-layer board.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### ESD CAUTION



#### ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS





Figure 2. QSOP Pin Configuration

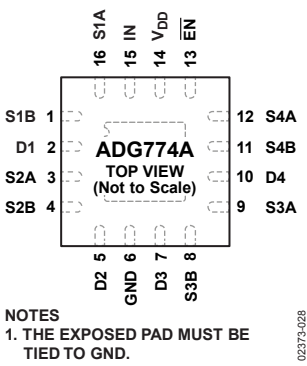

NOTES  
1. THE EXPOSED PAD MUST BE TIED TO GND.

Figure 3. LFCSP Pin Configuration

Table 4. Pin Function Descriptions

| Pin No.        |       | Mnemonic | Function                                                   |
|----------------|-------|----------|------------------------------------------------------------|
| QSOP           | LFCSP |          |                                                            |
| 1              | 15    | IN       | Logic Control Input.                                       |
| 2              | 16    | S1A      | Source Terminal 1A. May be an input or output.             |
| 3              | 1     | S1B      | Source Terminal 1B. May be an input or output.             |
| 4              | 2     | D1       | Drain Terminal D1. May be an input or output.              |
| 5              | 3     | S2A      | Source Terminal 2A. May be an input or output.             |
| 6              | 4     | S2B      | Source Terminal 2B. May be an input or output.             |
| 7              | 5     | D2       | Drain Terminal D2. May be an input or output.              |
| 8              | 6     | GND      | Ground (0 V) Reference.                                    |
| 9              | 7     | D3       | Drain Terminal D3. May be an input or output.              |
| 10             | 8     | S3B      | Source Terminal 3B. May be an input or output.             |
| 11             | 9     | S3A      | Source Terminal 3A. May be an input or output.             |
| 12             | 10    | D4       | Drain Terminal D4. May be an input or output.              |
| 13             | 11    | S4B      | Source Terminal 4B. May be an input or output.             |
| 14             | 12    | S4A      | Source Terminal 4A. May be an input or output.             |
| 15             | 13    | EN       | Logic Control Input. When high, all switches are disabled. |
| 16             | 14    | VDD      | Most Positive Power Supply Potential.                      |
| Not applicable | 17    | EPAD     | Exposed Pad. The exposed pad must be tied to GND.          |

Table 5. Truth Table

| EN | IN | D1   | D2   | D3   | D4   | Function |
|----|----|------|------|------|------|----------|
| 1  | X  | Hi-Z | Hi-Z | Hi-Z | Hi-Z | DISABLE  |
| 0  | 0  | S1A  | S2A  | S3A  | S4A  | IN = 0   |
| 0  | 1  | S1B  | S2B  | S3B  | S4B  | IN = 1   |

## TYPICAL PERFORMANCE CHARACTERISTICS

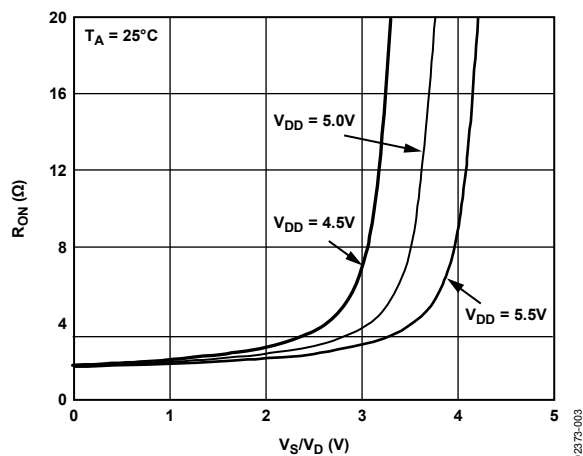


Figure 4. On Resistance as a Function of Drain ( $V_D$ ) or Source ( $V_S$ ) Voltage for  $V_{DD} = 5\text{ V} \pm 10\%$

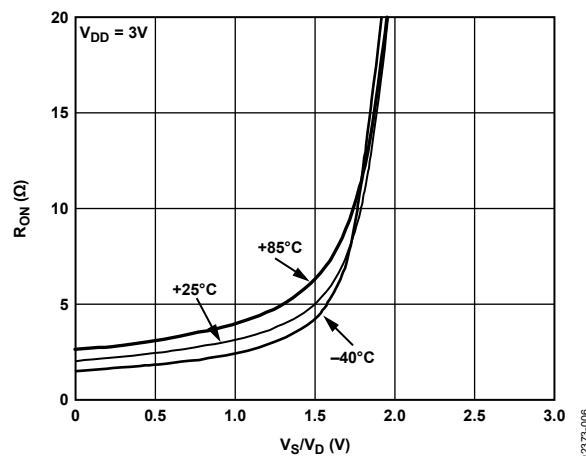


Figure 7. On Resistance as a Function of Drain ( $V_D$ ) or Source ( $V_S$ ) Voltage for Different Temperatures with 3 V Single Supplies

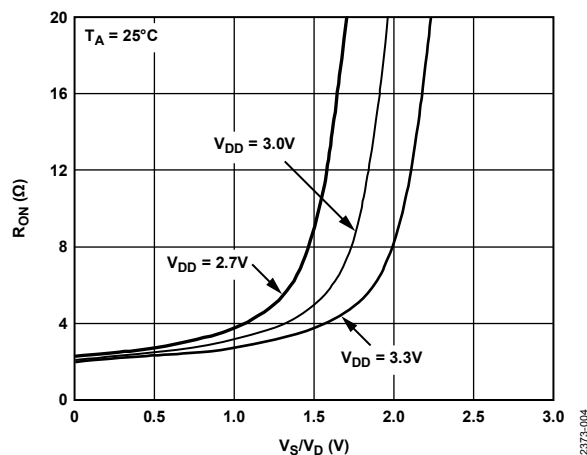


Figure 5. On Resistance as a Function of Drain ( $V_D$ ) or Source ( $V_S$ ) Voltage for  $V_{DD} = 3\text{ V} \pm 10\%$

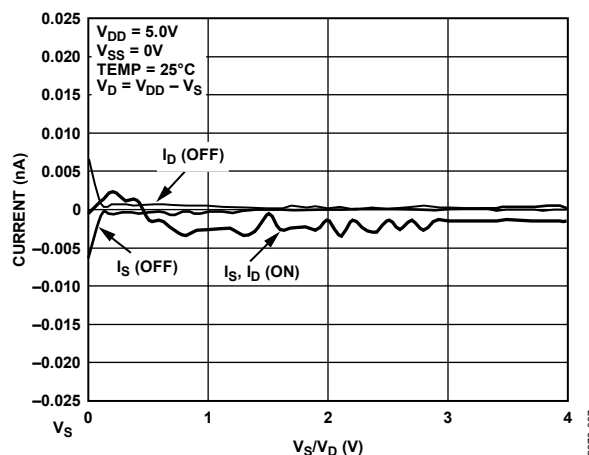


Figure 8. Leakage Current as a Function of Drain ( $V_D$ ) or Source ( $V_S$ ) Voltage for  $V_{DD} = 5\text{ V}$

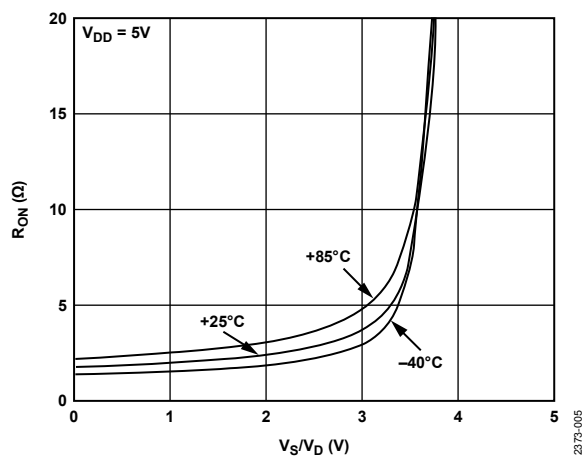


Figure 6. On Resistance as a Function of Drain ( $V_D$ ) or Source ( $V_S$ ) Voltage for Different Temperatures with 5 V Single Supplies

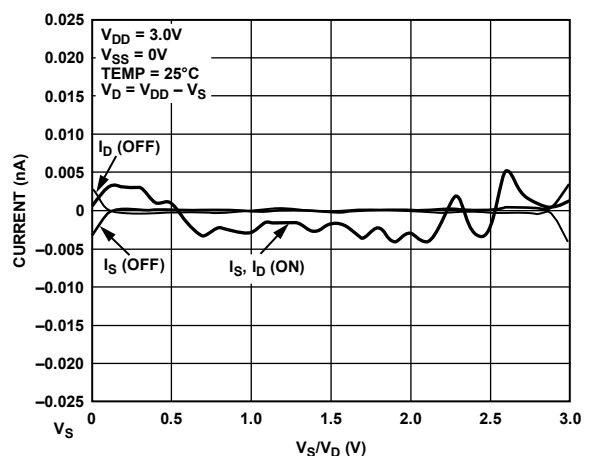


Figure 9. Leakage Current as a Function of Drain ( $V_D$ ) or Source ( $V_S$ ) Voltage for  $V_{DD} = 3\text{ V}$

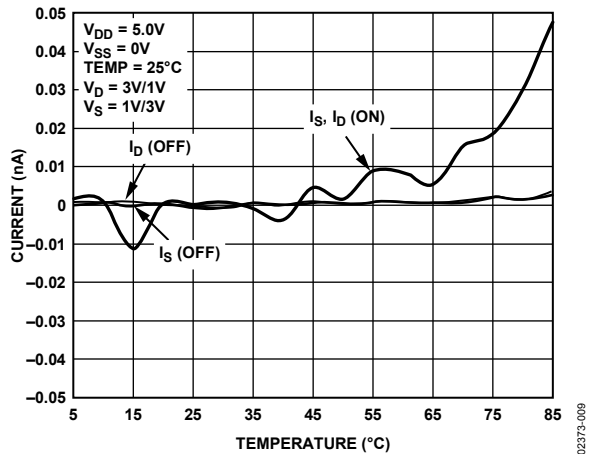
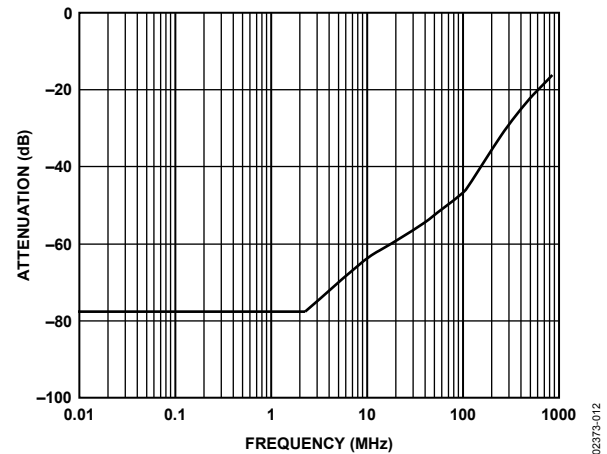
Figure 10. Leakage Current as a Function of Temperature,  $V_{DD} = 5\text{ V}$ 

Figure 13. Crosstalk vs. Frequency

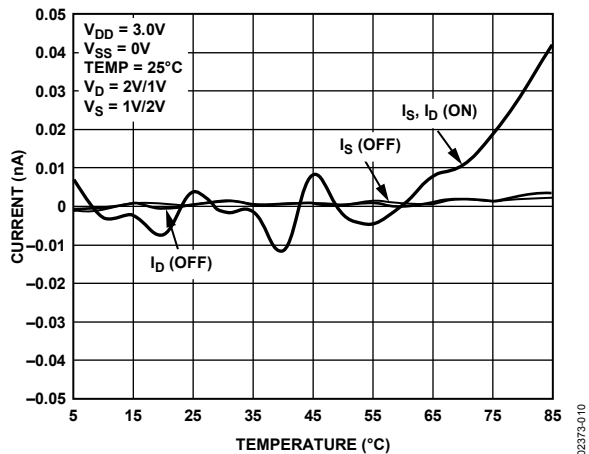
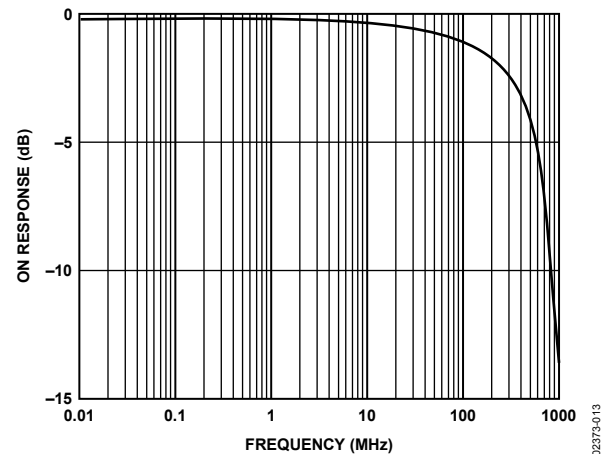
Figure 11. Leakage Current as a Function of Temperature,  $V_{DD} = 3\text{ V}$ 

Figure 14. Bandwidth

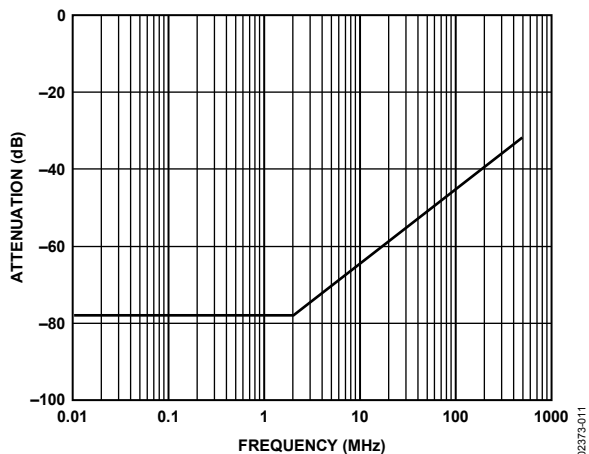


Figure 12. Off Isolation vs. Frequency

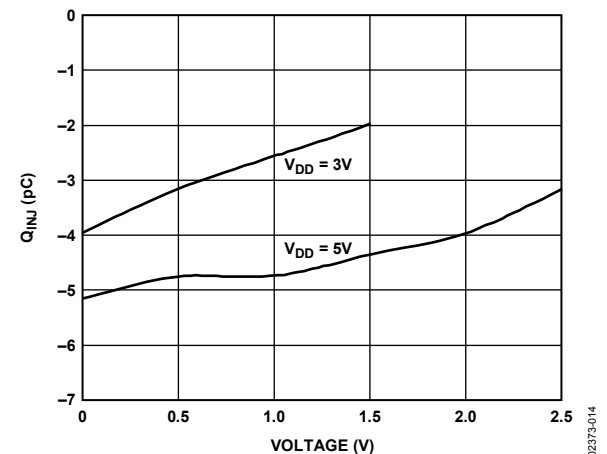


Figure 15. Charge Injection vs. Source Voltage



## TEST CIRCUITS




Figure 16. On Resistance

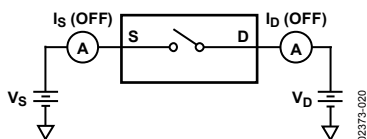


Figure 17. Off Leakage




Figure 18. On Leakage

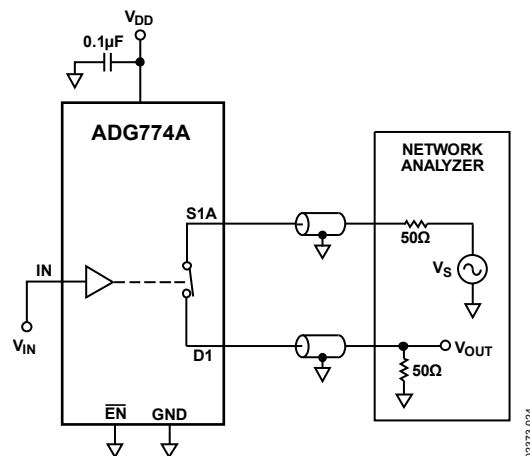


Figure 19. Bandwidth

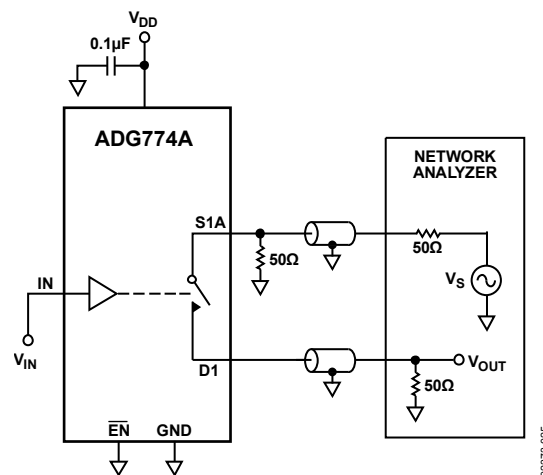


Figure 20. Off Isolation




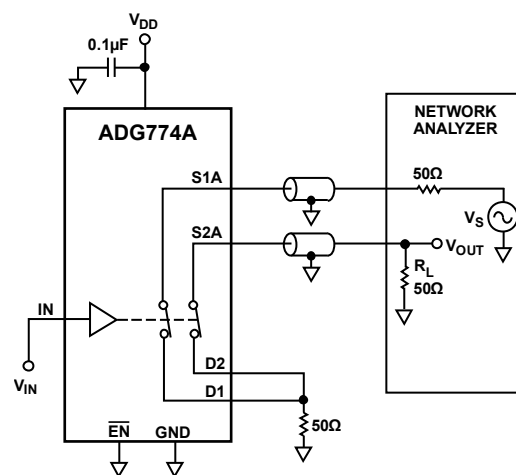


Figure 21. Channel-to-Channel Crosstalk

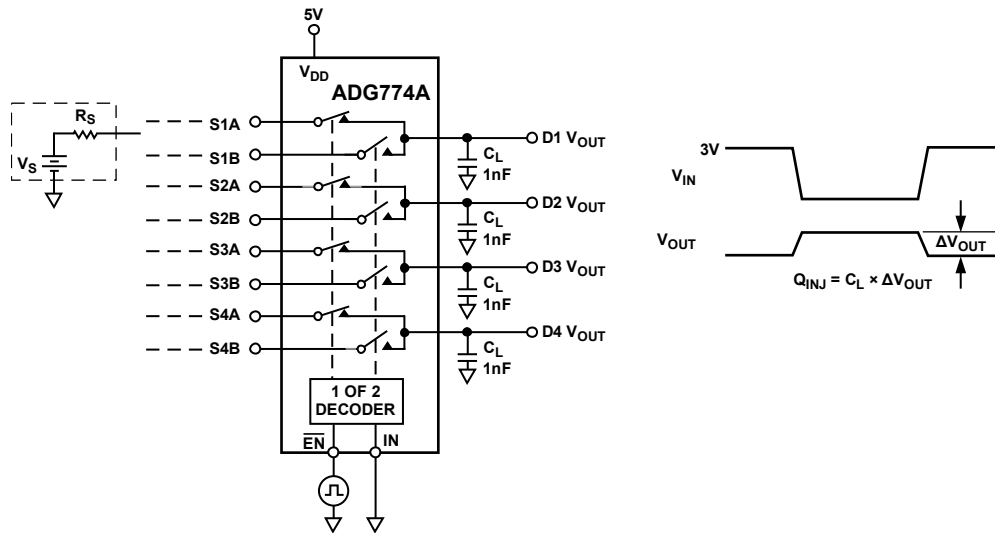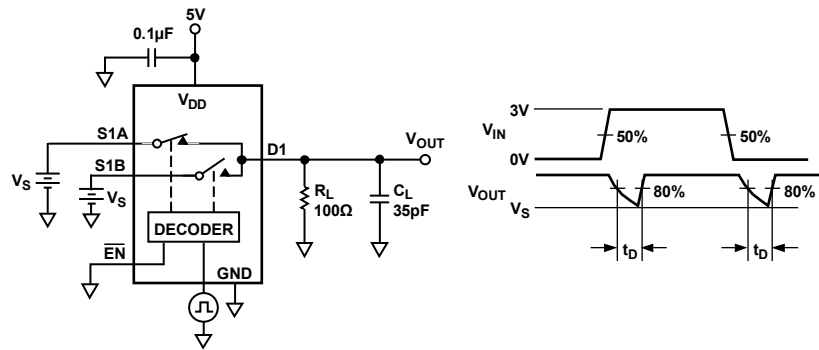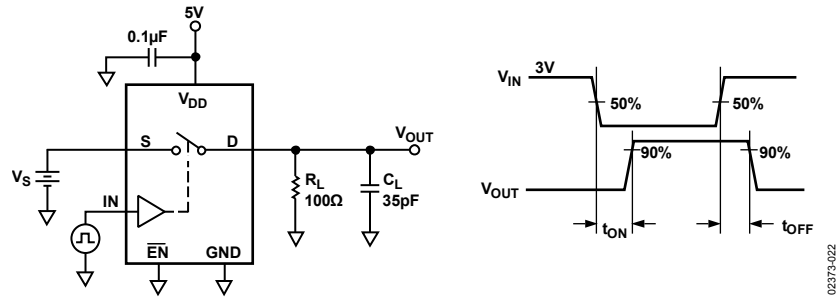

## TERMINOLOGY

### $V_{DD}$

Most positive power supply potential.

### GND

Ground (0 V) reference.

### S

Source terminal. May be an input or output.

### D

Drain terminal. May be an input or output.

### IN

Logic control input.

### $\overline{\text{EN}}$

Logic control input.

### $R_{ON}$

Ohmic resistance between D and S.

### $\Delta R_{ON}$

On resistance match between any two channels, that is,  $R_{ON \text{ max}} - R_{ON \text{ min}}$ .

### $R_{\text{FLAT(ON)}}$

Flatness is defined as the difference between the maximum and minimum value of on resistance as measured over the specified analog signal range.

### $I_S$ (OFF)

Source leakage current with the switch off.

### $I_D$ (OFF)

Drain leakage current with the switch off.

### $I_D, I_S$ (ON)

Channel leakage current with the switch on.

### $V_D$ ( $V_S$ )

Analog voltage on the D and S terminals.

### $C_S$ (OFF)

Off switch source capacitance.

### $C_D$ (OFF)

Off switch drain capacitance.

### $C_D, C_S$ (ON)

On switch capacitance.

### $t_{ON}$

Delay between applying the digital control input and the output switching on. See Figure 22.

### $t_{OFF}$

Delay between applying the digital control input and the output switching off.

### $t_D$

Off time or on time measured between the 80% points of both switches when switching from one address state to another. See Figure 23.

### Crosstalk

A measure of unwanted signal that is coupled through from one channel to another because of parasitic capacitance.

### Off Isolation

A measure of unwanted signal coupling through an off switch.

### Bandwidth

Frequency response of the switch in the on state measured at 3 dB down.

### Distortion

$R_{\text{FLAT(ON)}}/R_L$

APPLICATION CIRCUITS

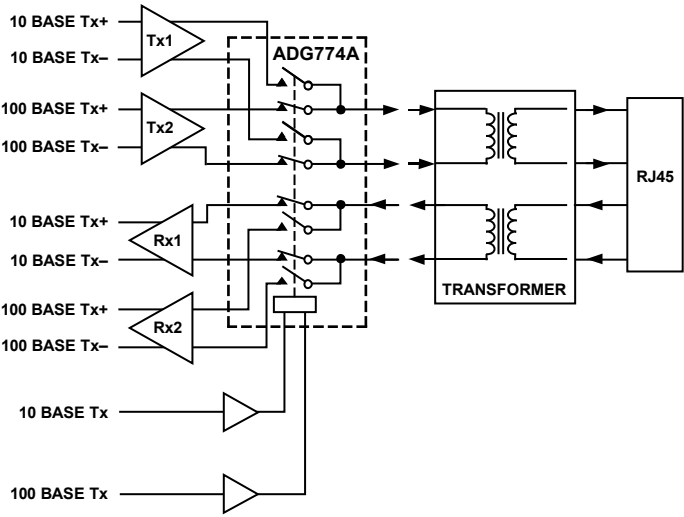


Figure 25. Full Duplex Transceiver

02373-016




Figure 26. Loop Back

02373-016




Figure 27. Line Termination

02373-017





Figure 28. Line Clamp

02373-018


## OUTLINE DIMENSIONS

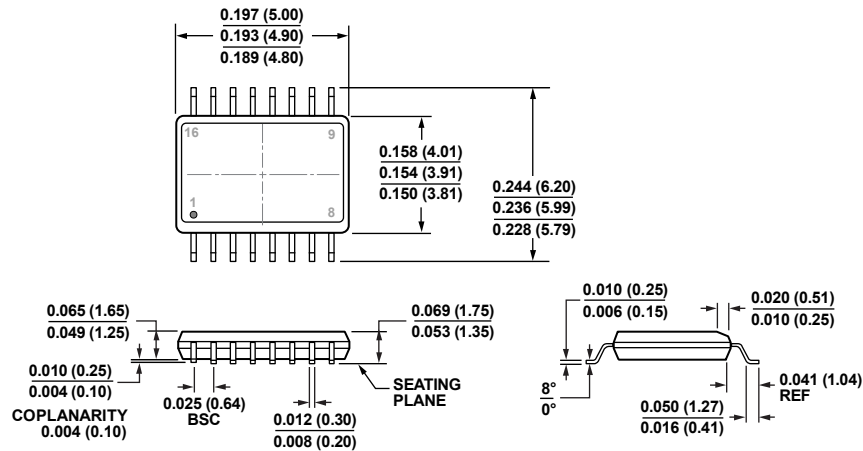

COMPLIANT TO JEDEC STANDARDS MO-137-AB  
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 29. 16-Lead Shrink Small Outline Package [QSOP]  
(RQ-16)

Dimensions shown in inches and (millimeters)

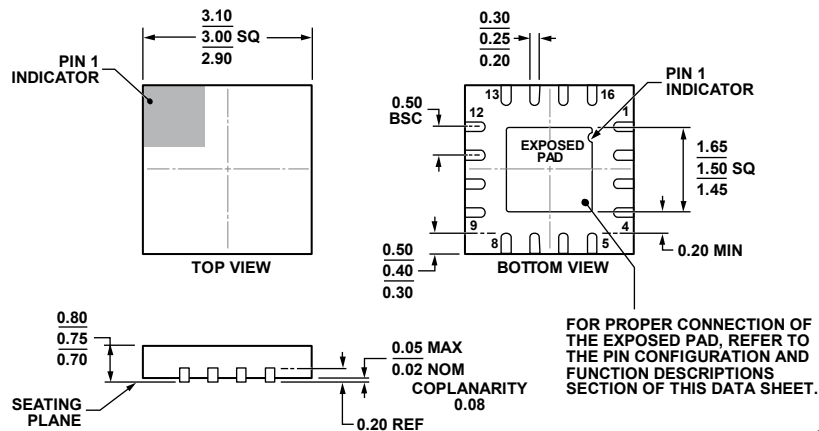

COMPLIANT TO JEDEC STANDARDS MO-220-WEED-6.

Figure 30. 16-Lead Lead Frame Chip Scale Package [LFCSP]  
3 mm × 3 mm Body and 0.75 mm Package Height  
(CP-16-27)

Dimensions shown in millimeters

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description                           | Package Option |
|--------------------|-------------------|-----------------------------------------------|----------------|
| ADG774ABRQ-REEL7   | -40°C to +85°C    | 16-Lead Shrink Small Outline Package [QSOP]   | RQ-16          |
| ADG774ABRQZ        | -40°C to +85°C    | 16-Lead Shrink Small Outline Package [QSOP]   | RQ-16          |
| ADG774ABRQZ-REEL   | -40°C to +85°C    | 16-Lead Shrink Small Outline Package [QSOP]   | RQ-16          |
| ADG774ABRQZ-REEL7  | -40°C to +85°C    | 16-Lead Shrink Small Outline Package [QSOP]   | RQ-16          |
| ADG774ABCPZ-REEL   | -40°C to +85°C    | 16-Lead Lead Frame Chip Scale Package [LFCSP] | CP-16-27       |
| ADG774ABCPZ-R2     | -40°C to +85°C    | 16-Lead Lead Frame Chip Scale Package [LFCSP] | CP-16-27       |

<sup>1</sup> Z = RoHS Compliant Part.

**NOTES**