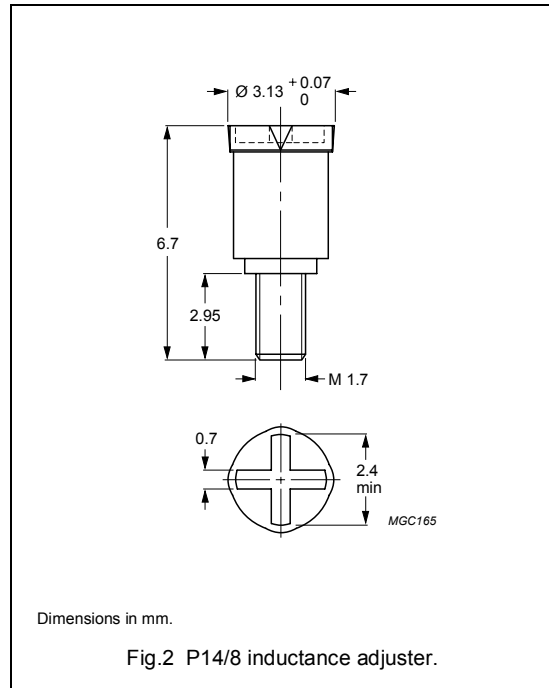


INDUCTANCE ADJUSTERS**General data**

PARAMETER	SPECIFICATION
Material of head and thread	polypropylene (PP), glass fibre reinforced
Maximum operating temperature	125 °C

**Inductance adjuster selection chart^{sup} (applies to all types)**

GRADE	A _L (nH)	TYPES FOR LOW ADJUSTMENT	ΔL/L ⁽¹⁾	TYPES FOR MEDIUM ADJUSTMENT	ΔL/L ⁽¹⁾	TYPES FOR HIGH ADJUSTMENT	ΔL/L ⁽¹⁾
3H3	100	—	—	ADJ-P14-ORANGE	14	—	—
	160	—	—	ADJ-P14-WHITE	17	ADJ-P14-BROWN	24
	250	ADJ-P14-WHITE	10	ADJ-P14-BROWN	15	—	—
	315	ADJ-P14-WHITE	8	—	—	—	—
	400	ADJ-P14-BROWN	9	—	—	—	—
	630	ADJ-P14-BROWN	4	—	—	—	—
3D3	40	—	—	—	—	ADJ-P14-ORANGE	24
	63	—	—	—	—	ADJ-P14-ORANGE	20
	100	ADJ-P14-ORANGE	11	—	—	—	—

Note

1. Maximum adjustment range.