

RF Transformer

50Ω 20 to 1200 MHz

ADT1.5-122+



CASE STYLE: CD542


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.5W
DC Current	30mA
Permanent damage may occur if any of these limits are exceeded.	


Pin Connections

PRIMARY DOT, 50Ω unbalanced	3
PRIMARY	1 & 2 connect to GND
SECONDARY DOT, 75Ω balanced	4
SECONDARY, 75Ω balanced	6
NOT USED	5

Outline Drawing

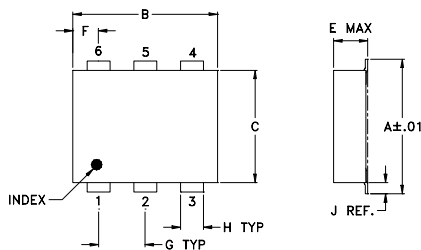

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002

Outline Dimensions (inch)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54
H	J	K	L	wt		
.030	.026	.065	.300	grams		
0.76	0.66	1.65	7.62	0.20		

Demo Board MCL P/N: TB-375 Suggested PCB Layout (PL-257)

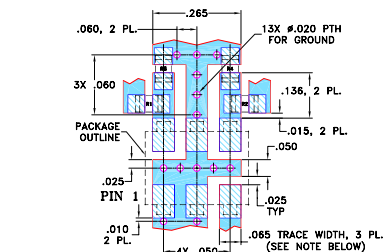

RESISTORS R1-R2: 24.9 Ohm, .0805 SIZE
RESISTORS R3-R4: 75.0 Ohm, .0805 SIZE

NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- excellent return loss, 19 dB typ. in 1 dB bandwidth
- good amplitude unbalance, .25 dB typ. and phase unbalance, 1.0 deg. typ in 1dB bandwidth
- good insertion loss flatness from 50 MHz to 850 MHz
- aqueous washable
- protected under US patent 6,133,525

Applications


- impedance matching
- balanced amplifier
- cable TV

Transformer Electrical Specifications

RATIO (Secondary/Primary)	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
1.5	20-1200	—	20-1200	50-1000	1.0	1.2	.25	.35

* Insertion Loss is referenced to mid-band loss, 1 dB typ.


Config. K




Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
20.00	1.25	19.29	0.01	0.70
40.00	1.17	20.85	0.11	0.53
50.00	1.15	21.10	0.11	0.21
60.00	1.14	21.36	0.07	0.03
100.00	1.11	22.20	0.03	1.13
300.00	1.19	19.59	0.01	1.23
500.00	1.25	19.83	0.21	2.15
850.00	1.37	24.80	0.56	0.69
1000.00	1.51	19.14	0.76	1.45
1200.00	1.95	11.92	0.95	5.56

ADT1.5-122+
INSERTION LOSS

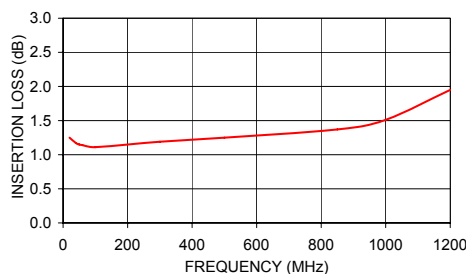

ADT1.5-122+
INPUT RETURN LOSS

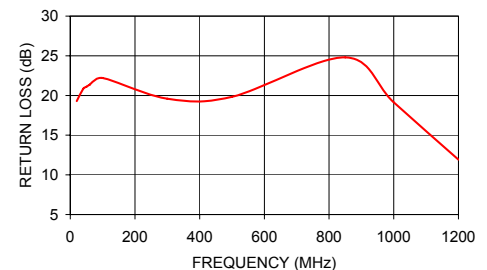

conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

