


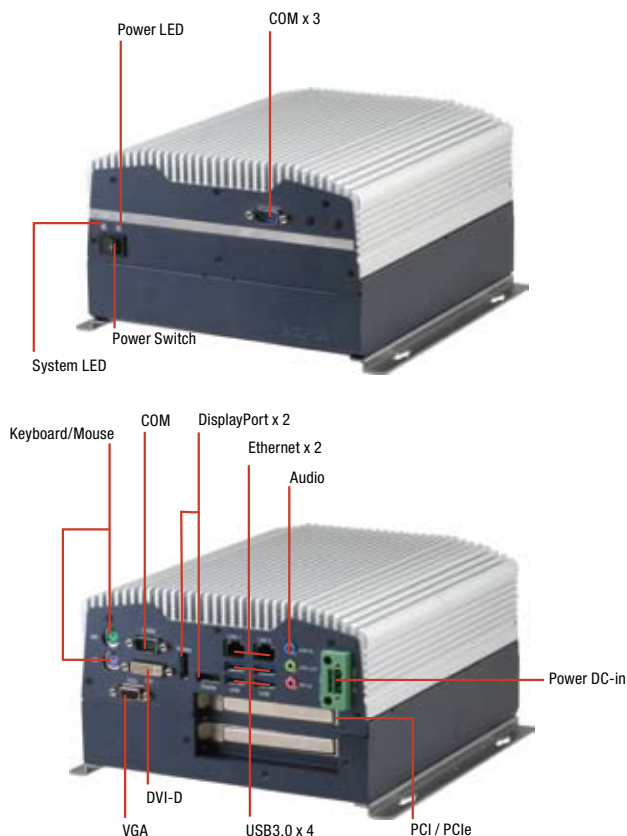

Specifications

CPU		Intel® Core™ i7-3610QE 2.3GHz Intel® Core™ i7-2710QE 2.1GHz Intel® Core™ i5-2510E 2.5GHz Intel® Celeron® B810, 1.6 GHz processor with socket PGA988
Chipset		Intel® QM77
System Memory		204-pin Dual-channel DDR3 1066/1333/1600 MHz SODIMM x 2, Up to 8 GB
Display Interface	VGA	DB-15 x 1
	DVI	DVI-D x 1, supports 1920x1200 @ 60 Hz
	HDMI	—
	Others	DisplayPort™ x 2
Storage Device	SSD	CFast™ slot, SATA 6.0Gb/s x 2, Support RAID 0,1,5,10
	HDD	—
Network	LAN	10/100/1000Base-TX
	Wireless	Optional by Mini Card
Front I/O	USB Host	—
	LAN	—
	Serial Port	DB-9 x 1 for RS-232
	DIO	—
	Audio	—
	KB/MS	—
	Others	Push Power button x 1, Standard Antenna hole x 2
Rear I/O	USB Host	USB 3.0 x 4
	LAN	RJ-45 x 2
	Serial Port	DB-9 x 1 for RS-232/422/485
	DIO	—
	Audio	Mic-in, Line-in, Line-out
	KB/MS	PS/2 KB x 1+ MS x 1
	Others	Power input x 1
Expansion	PCIe [x4]	—
	PCI	—
	Mini Card	—
	Mini PCI	—
	Others	AxM : PCI-E[x4] x 1, BxM: PCI x 2

Features

- Intel® Core™ Intel® i7-3610QE, i5-2510E (Ivy Bridge)/ i7-2710QE (Sandy Bridge) and Celeron® B810 Processor
- Intel® QM77 Chipset
- Three Independent Video Output for DisplayPort™ x 2 + VGA or DVI
- USB 3.0 x 4
- PCI x 2 or PCI-Express[x4] x 1
- Power Protection
 - Over-Voltage Protection
 - Low Voltage Protection
 - Short Circuit Protection
 - Surge Protection (1000V DC)




Indicator	Front	Power LED x 1, Hard Disk Drive active LED x 1
	Rear	—
Power Requirement	DC 9 ~ 30V with 3-pin terminal block	
Power Consumption	—	
System Cooling	Passive Cooling	
Mounting	Wallmount	
OS support	Window® XP Embedded, Window® XP, Window® 7, Linux Fedora	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C) – without airflow	
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)	
Storage Humidity	10%~95% @40°C, non-condensing	
Anti-Vibration	5g rms / 5 ~ 500Hz / operation – CFast™ 1g rms / 5 ~ 500Hz / operation – HDD	
Anti-Shock	20 G peak acceleration (11 msec. duration) – HDD	
MTBF	—	
Certification	EMC	CE/FCC class A
	Safety	—
Dimension (W x H x D)	8.19"(W) x 4.02"(H) x 9.37"(D) (208mmx 102mm x 238mm)	
Gross Weight	13.2 lb (6 Kg)	

Optional Accessories

- **1757912001**
Power Adapter, 19V, 6.32A, 120W, FSP, FSP120-AAB (A651), for DC 9-30V
- **1702031802**
Power Cord (US Type) - for 1757306004
- **1702031830**
Power Cord (US Type) - for 1757908400
- **1702031831**
Power Cord (Japanese Type)
- **1702031810**
Power Cord (European Type)

Dimension

Unit: mm

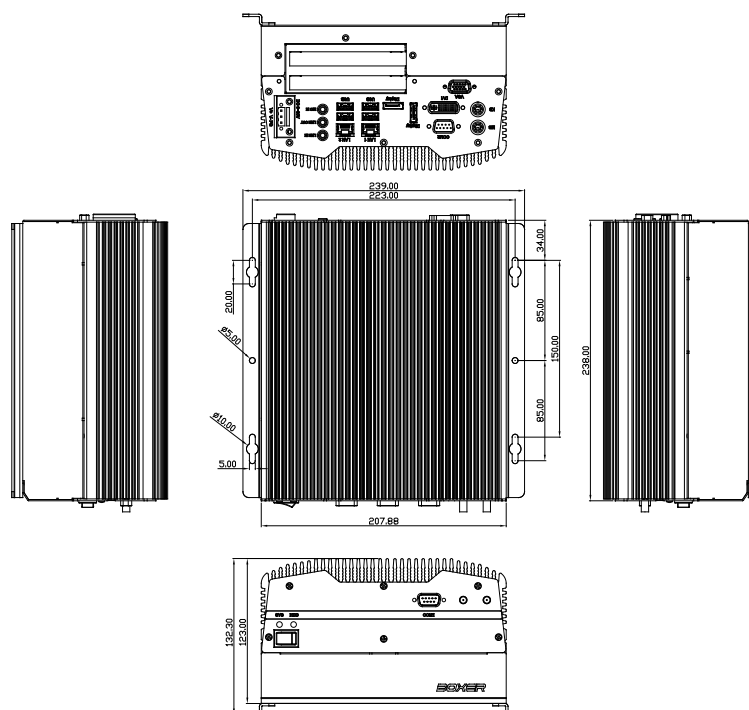

Ordering Information

Part Number	CPU	RAM	LAN	USB	RS-232	RS-232/422/485	Storage	Accessory Cables	Display	Expansion	Mounting	Power	Temp.
AEC-6877-A1M-1010	Intel® Celeron® B810	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCIe x 1	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-A2M-1010	Intel® i7-2710QE 2.1GHz	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCIe x 1	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-A3M-1010	Intel® i5-2510E 2.7GHz	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCIe x 1	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-A4M-1010	Intel® i7-3610QE 2.3 GHz	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCIe x 1	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-B1M-1010	Intel® Celeron® B810	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCI x 2	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-B2M-1010	Intel® i7-2710QE 2.1GHz	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCI x 2	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-B3M-1010	Intel® i5-2510E 2.7GHz	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCI x 2	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow
AEC-6877-B4M-1010	Intel® i7-3610QE 2.3 GHz	2GB	2	4	1	1	CFast™ x 1 HDD x 1	—	VGA x 1 DVI x 1 DP x 2	Mini Card x1 PCI x 2	Wallmount	DC 9-30V	0°C ~ 50°C without airflow 0°C ~ 55°C with airflow