RoHS

100/1000 Base T Gigabit Single Port Transformer AGSC-2417I


- **Cw/w: 25PF Typ @ 100KHz, 200mV**
- **LL: 0.5µH Max @ 100KHz, 200mV**
- **DCR: 0.9Ω Max**
- **Operating Temp: -40ºC to +85ºC**

Electrical Specifications @ 25°C							
Part Number	OCL(uH Min) @ 100kHz, 200mV With 8mA DC Bias	Turns Ratio chip: cable (±5%)	Insertion Loss (dB Max)	Return Loss (dB Min)			
			0.3-100MHz	0.3-30MHz	40MHz	50MHz	60-80MHz
AGSC-2417I	350	1CT:1CT	-1.1	-18	-14.4	-13.1	-12

Electrical Specifications @ 25°C						
Part Number	Common Mode Rejection (dB Min)			Cross Talk (dB Min)		Isolation HI-POT (Vrms)
	0.3-30MHz	60MHz	80-100MHz	0.3-30MHz	60-100MHz	
AGSC-2417I	-40	-35	-30	-35	-32	1500

All specifications subject to change without notice.

MECHANICAL

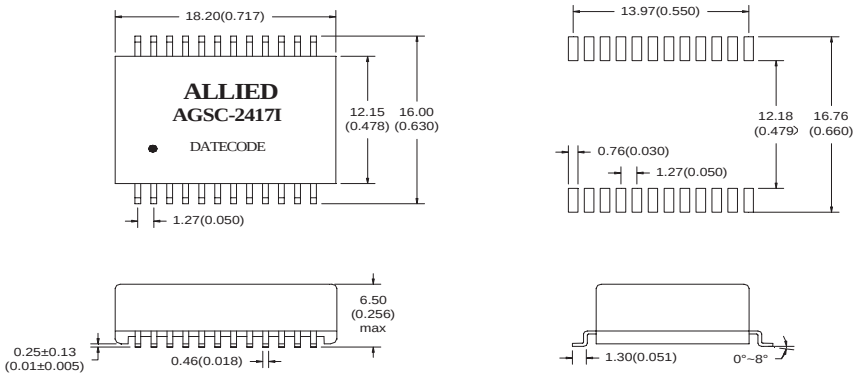

Dimensions: mm(inch)
Unless otherwise specified, all tolerances are ±0.25(0.010)

SCHEMATICS

