

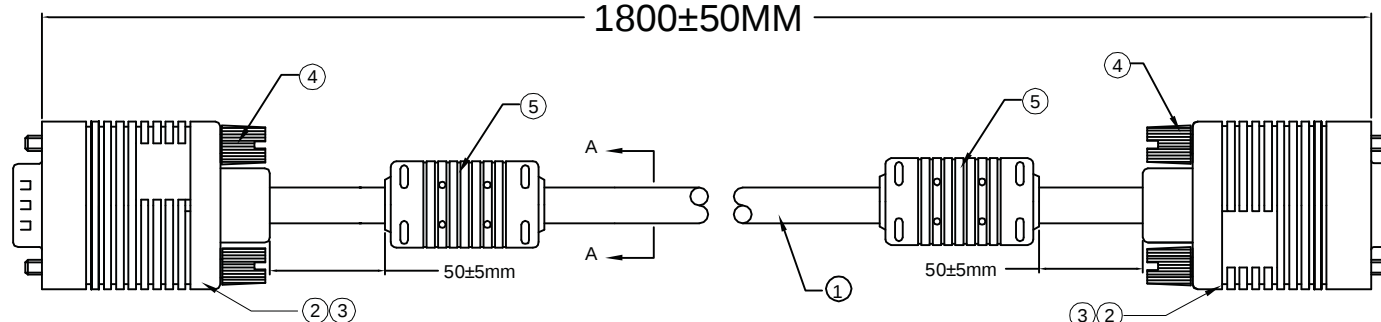


RoHS Compliant

HDB 15P MALE

- 1800±50MM

HDB 15P MALE




1. CABLE: UL 2919 [30AW++AL/MY]*3COAX+30AWG*7C+AL/MY+D
+B OD=8.0±0.20mm JACKET COLOR: BEIGE
CABLE MUST PRINT: Exxxxxx  AWM STYLE 2919 80°C 30V VW-1

2.CONNECTOR:
P1&P2: HDB 15P/M,SOLDER,BLUE INSULATION,GOLD PLATED CONTACTS, NICKEL PLATED SHELL

3.HOOD: MOLDED TYPE,ABS,COLOR:BEIGE.
4.THUMB SCREW: #4-40 UNC, MOLDED TYPE,PVC 45P,COLOR:BEIGE
5.FERRITE CORE: (Ø17.5 XØ9.5 X 28.5mm), MOLDED BEIGE PVC.

6.ELECTRICLE TEST:


- (1)100% OPEN SHORT & MIS WIRE TEST.
- (2)CONTACT RESISTANCE 3 ohm Max .
- (3)INSULATION RESISTANCE 10M ohm Min .
- (4)HI-POT TEST:DC 300V/10ms

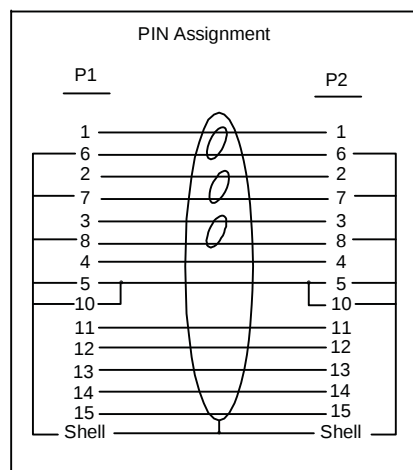

Single Cable

VGA Monitor connection cable, HD15
M/M, 1.8m, 3Coax/7C, 2x ferrite,
UL, be


P/N: AK-310103-018-E



Inner Packing Unit

P/N:AK-310103-018-E

QTY:5 PCS



80496

	Date	Name
Drawn by	Sep.17,2013	Sean
Checked by	Sep.17,2013	Joe
Approved by	Sep.17,2013	Andy
ASSMANN Electronic GmbH		

Part No.

AK-310103-018-E

EAN:4016032286622

Title

HDB 15P/M - HDB 15P/M CABLE

Scale

N/A

Sheet

1/1

1

2

3

A

5

6

7

804¢