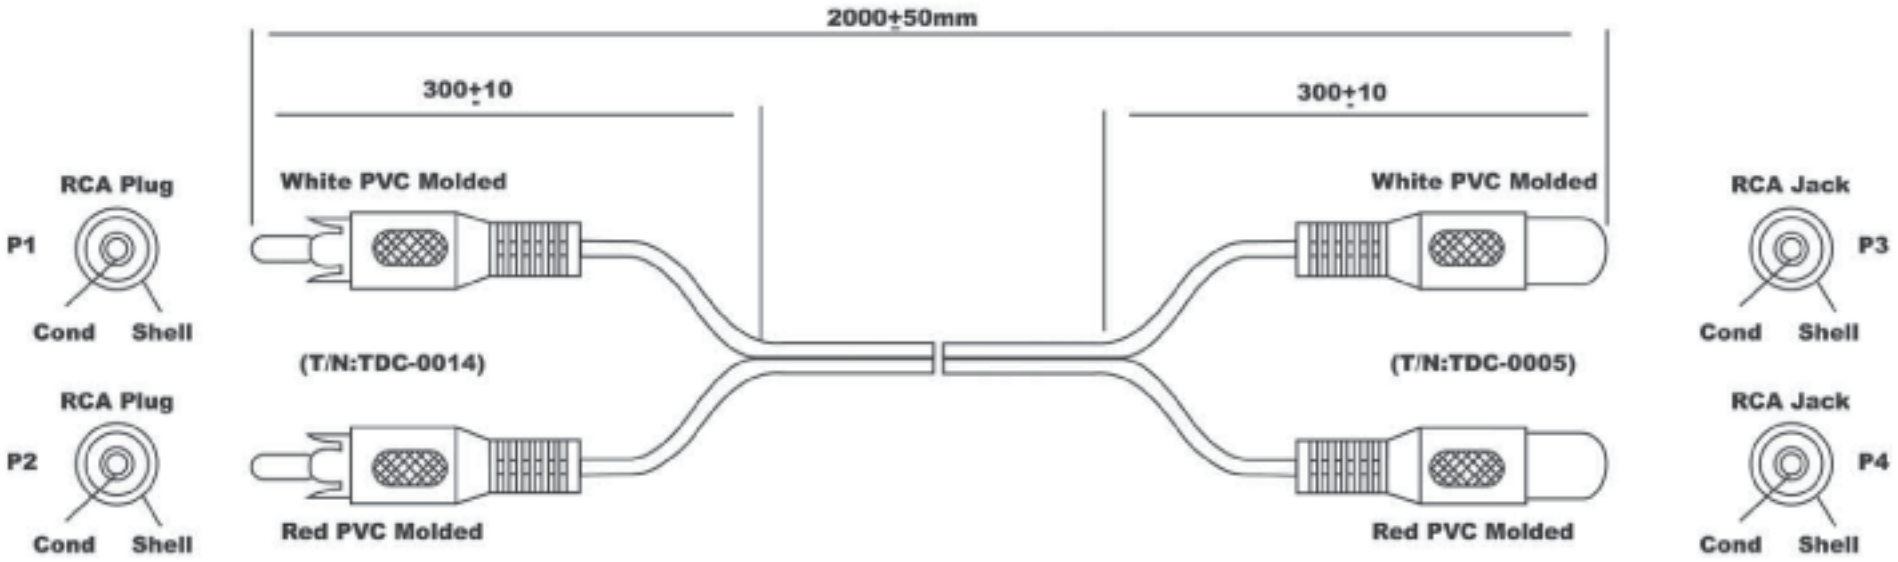


PIN Out

P1		P3
Cond	White	Cond
Shell	Spiral	Shell

PIN Out

P2		P4
Cond	Red	Cond
Shell	Spiral	Shell

Material:

- Cable: Non-UL [26(10/0.12)*1C Tinned Copper Insulation: PVC+ Spiral Shield(28/0.12) Tinned Copper]*2 Flat, Jacket; PVC OD:Ø2.8*5.6±0.15mm Color: Black(NK-KO1)
- Connectors: P1&P2: RCA Plug Nickel Plated
  P3&P4: RCA Jack Nickel Plated
- Hood: P1&P3: Molded Type, PVC 45P, Color: White(NK-WO1)
  P3&P4: Molded Type, PVC 45P, Color: Red(NK-RO1)
- Test Request: <1>. 100% Open Short & MIS Wire Test
  <2>. Insulation Resistance: 1M min.
- Packing: Seep-0039 Rev.B Packing Drawing
  EAN Code: 4016032051329
  (Binding size must be smaller than blister)
- Blister Size: DB VP2

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	01.03.12	Chappell
Approved		

ASSMANN WSW components

Item No.
AK-CHMF-015-R (1.5M) **AK-CHMF-R** (2.0M)
AK-CHMF-025-R (2.5M) **AK-CHMF-050-R** (5.0M)

Title Cinch Connection Cable, Molded Hoods, 2 x Cinch Male to 2 x Cinch Female

Drawing No.

rev00

Replace

Sheet