


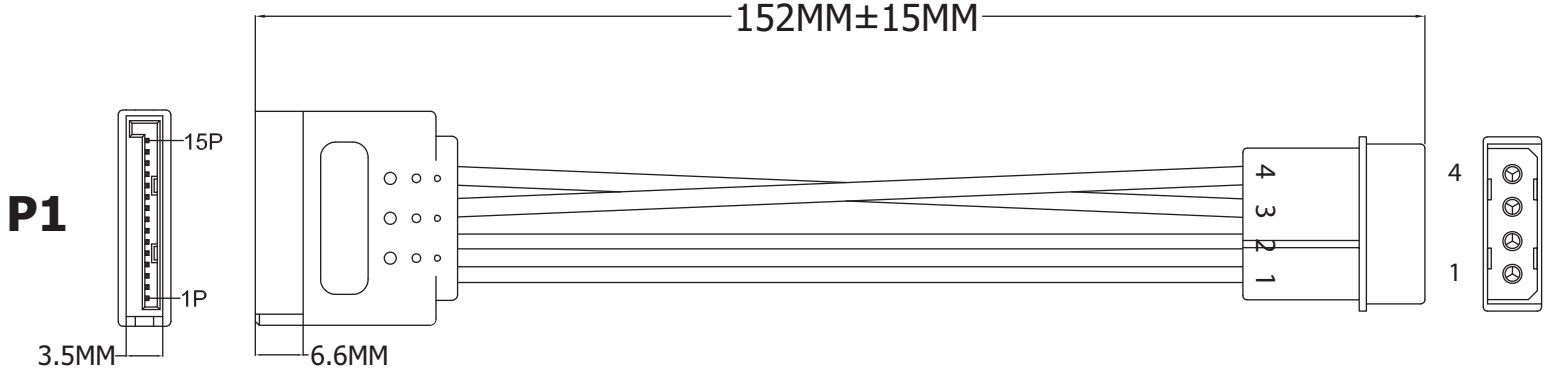


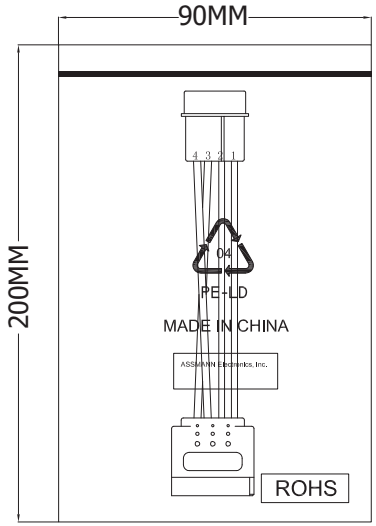



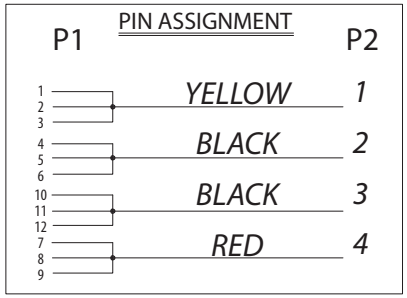

Material:

- Cable: UL1007 18AWG(41/0.16 TC)
  - OD: 2.0MM
- P1 Connector: SATA 15-pin/Female
  - Crimp Type
  - Terminal: 15μ"
  - Insulator: Black PBT
  - PVC 45P Black / Clear HD-PE
- P2 Connector: Big 4Pin Female Housing
  - PH: 5.08MM
  - White
  - Terminal Male, Tin Plated

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 3Ω Max.
- Insulation resistance: 20MΩ Min.
- Hi-Pot test: 300V DC

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	12.29.11	Chappell
Approved		

ASSMANN WSW components

Item No. AK-SATA-PC-015-R

Title Serial ATA Power Supply Cable
15-pin SATA Female <=> 4-pin ATX Female

Drawing No. rev00

Replace | Sheet