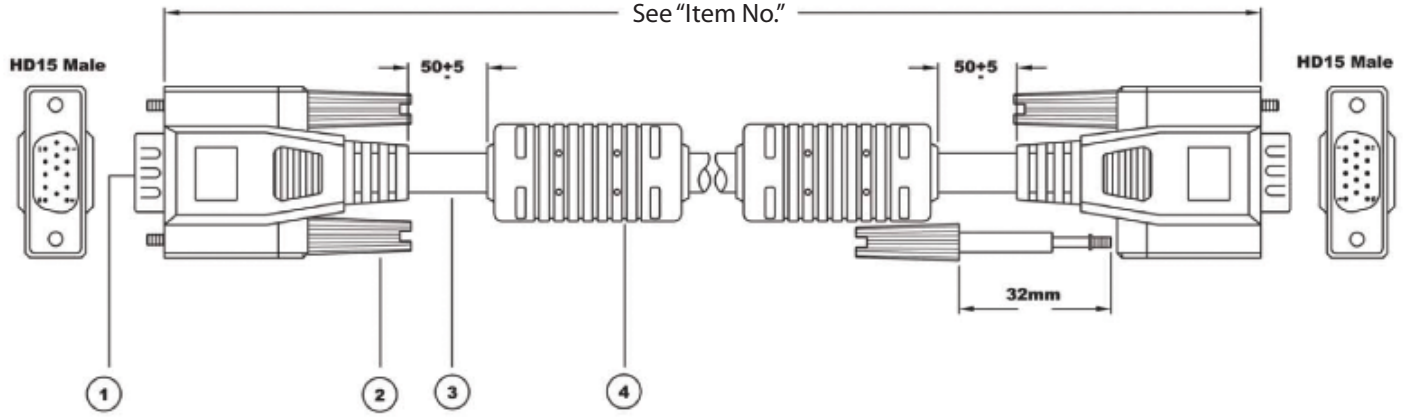


Configuration:

HD15M		HD15F
1	Red(Coax)	1
6	Red(Ground)	6
2	Green(Coax)	2
7	Green(Ground)	7
3	Blue(Coax)	3
8	Blue(Ground)	8
4	Brown	4
5	Black	5
13	Green	13
14	Red	14
10	Orange	10
11	White	11
12	Yellow	12
Shield	(Braid)	Shield

Material:

1.Cable:UL2919, 3COAXIAL+7C+1+AL/MY+Braid,
(Beige PVC Jacket) O.D:8.5
2.Connector: HD15M, 9th Empty, Black
3.Thumbscrew:#4-40UNC, E32
4.Ferrite Core:RH16 x 28 x9
5.Copper Size:30X50
6.Black Heat Shrink:⌀1.05x15:6PCS ⌀3x8:6PCS

Note:

1.Total Length: See "Item No."
2.Color: Beige
3.Molded Type

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.16.11	Chappell
Approved		

ASSMANN WSW components

Item No.
AK5320X-R (1.8 M) AK3770X-R (5.0 M)
AK3760X-R (3.0 M) AK3780X-R (10.0 M)

Title
Premium XGA Moniter Connection Cable,
HD D-Sub 15 pin Male to HD D-Sub 15 pin Male

Drawing No.

rev00

Replace

Sheet