


P1 **P2**

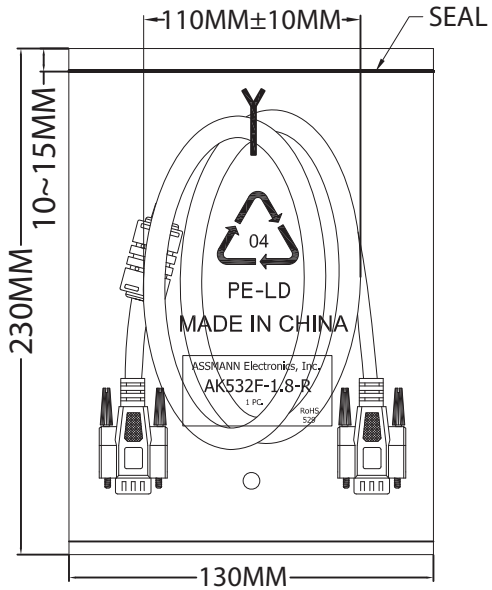

1PC/PF BAG

PIN ASSIGNMENT

P1		P2
1	WHITE	1
2	GREY	2
3	YELLOW	3
4	PINK	4
5	ORANGE	5
6	RED	6
7	BROWN	7
8	GREEN	8
10	BLUE	10
11	PURPLE	11
12	LIGHT GREEN	12
13	LIGHT BLUE	13
14	BLACK	14
15	WHITE/BLACK	15
Shell	DRAIN	Shell

Material:

- Cable: NOUL 28AWG(7/0.12TC)*14C+AL/MY+D.W(7/0.12 TC)
  - ø6.0MM±0.15MM
  - Outer Jacket: Beige
- Connectors: HDD15P Male, Pin-G/F
  - Shell: Nickel
  - Insulation color: Blue
  - Missing 9 Pin Solder Type
- Outer Jacket: 40P PVC
- Inner Jacket: Clear LDPE
- Screw: $4-4ounc Type
  - Nickel Plate
  - Beige ABS
- Copper Foil: Double Sided Conductive Copper Foil
  - 18μ" W25MM*L55MM

Electrical:

- 100% short, open, miswire test
- Conduct Resistance: 2Ω Max.
- Insulation Resistance: 5MΩ Min.
- Hi-Pot: 300V DC / 10ms

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.16.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK532F-1.8-R**

Title VGA Moniter Cable, HD D-Sub 15 Pin Male <=> HD D-Sub 15 Pin Mal, 1.8 Meters, Beige

Drawing No. **rev00**

Replace | Sheet