
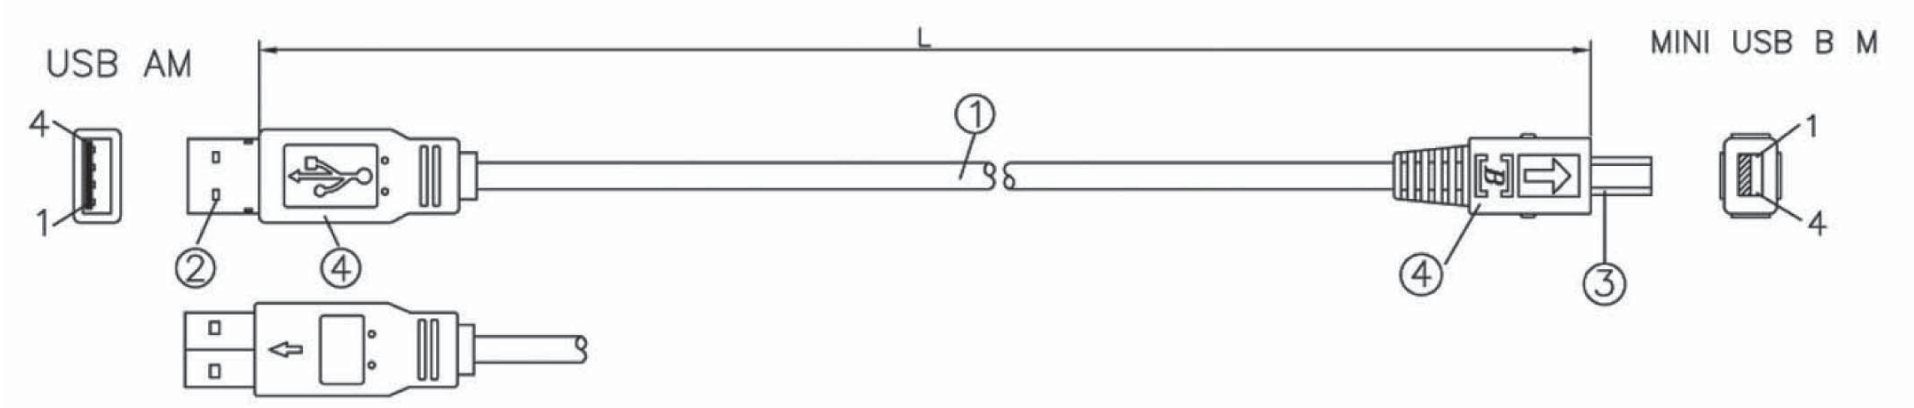


CONFIGURATION:

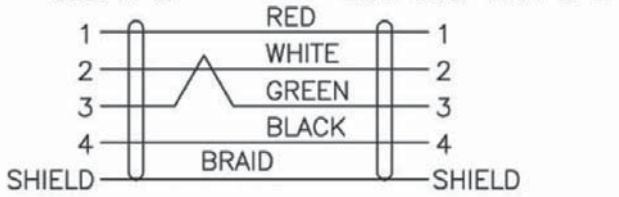

ITEM NO	L
AK670M-1-R	1000±30MM
AK670M-2-R	2000±50MM
AK670M-3-R	3000±50MM
AK670M-5-R	5000±50MM

ELECTRECAL TEST:

1.100% SHORT, OPEN, MISWIRE TEST

2.CONDUCT RESISTANCE: X Ohm (MAX.)
(0<L<3M:X=2; 3M≤L<10M:X=5; 10M≤L:X=10)

3.INSULATION RESISTANCE: 10M Ohm (MIN.)

4.DIELECTRIC TEST: AC 300V

NO.	DESCRIPTION
④	OUTER MOLD:45P PVC COLOR:BLACK(CS-001)
③	CONNECTOR:MINI USB 4P B PLUG SOLDER TYPE 3U"
②	CONNECTOR:USB A MALE SOLDER TYPE 3U" INSULATION:WHITE
①	CABLE:UL20276,28AWG*1P+28AWG*2C+AL/MY+SPIRAL,O.D:3.8MM PVC JACKET COLOR:BLACK(CS-001)

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	08.29.11	Chappell
Approved		

ASSMANN WSW components

Item No.
AK670M-X-R (Version 1.1)
AK670M/2-X-R (Version 2.0)

Title USB 1.1 & 2.0, USB A Male to USB B Mini (4 pin)

Drawing No.

rev00

Replace

Sheet