

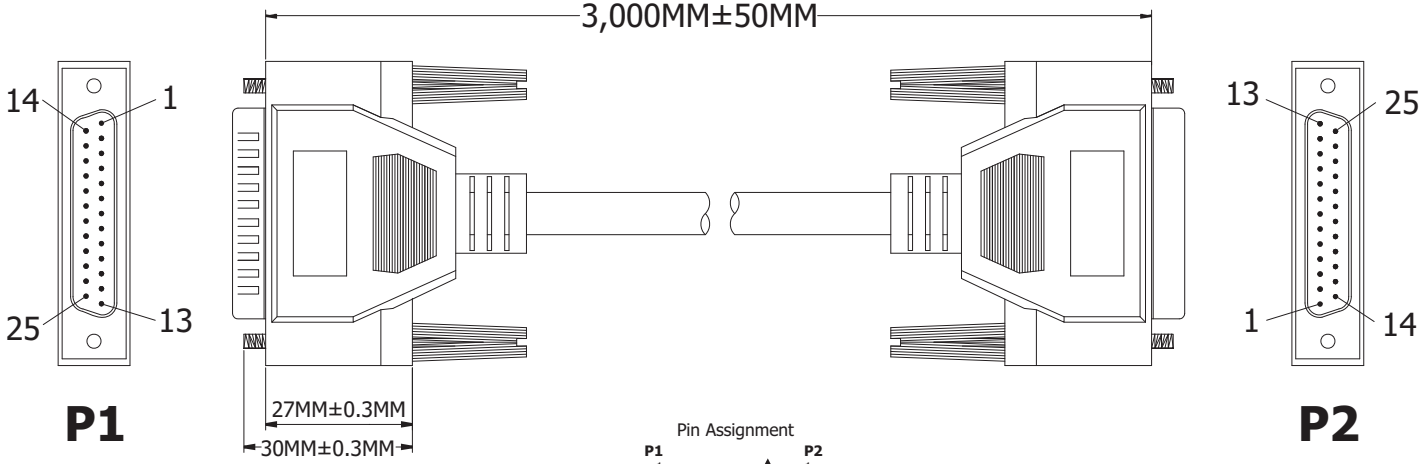


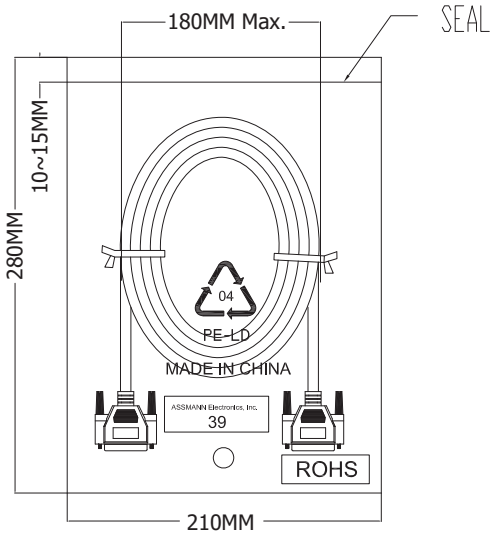

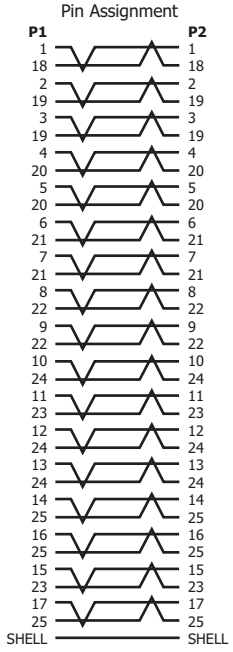

Material:

- Cable: UL20276 28AWG(7/0.12TC)*18+D(26AWGTC)+AL/MY+BRAID(85%)
  O.D.: 7.5MM
- Connectors - P1&P2: DB 25P Male Soder Type Pin G/F Shell NI-Plated (Insulator: Blue)
- Outer Jacket: 40P PVC
- Inner Jacket: Clear LD-PE
- Screw: #4-40UNC Type L=30MM, Nickel Plated
- Color: Beige

Electrical:

- 100% short, open, miswire test
- Contact resistance: 5Ω Max.
- Insulation resistance: 10MΩ Min.
- Hi-Pot: 300V DC / 10ms

RoHS Complaint

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Modification	Date	Name

		Name
Drawn	11.11.11	Chappell
Approved		

ASSMANN WSW components

Item No. **AK737-3-R**

Title IEEE 1284 Bi-Directional Connection Cable, D-Sub 25 pin Male <=> Male to D-Sub 25 pin Male, 3 Meters

Drawing No. **rev00**

Replace | Sheet