


**Limit Alarms (rotary switch adj.) AL-UNIT****CT ALARM****Functions & Features**

- Providing SPDT relay outputs at preset AC current levels from a CT
- True RMS sensing
- Dual (Hi/Lo) trip
- CT Protector provided for open-circuit protection
- Energized or de-energized coil at a tripped condition selectable
- Rotary switch setpoint adjustments
- Enclosed relays
- Relays can be powered 110 V DC
- High-density mounting

**Typical Applications**

- Annunciator
- Various alarm applications

**MODEL: ALCT-[1][2][3]-[4][5]****ORDERING INFORMATION**

- Code number: ALCT-[1][2][3]-[4][5]
- Specify a code from below for each of [1] through [5].  
(e.g. ALCT-111-B/Q)
- Specify the specification for option code /Q  
(e.g. /C01/S01)

**[1] INPUT****Current**

- 1: 0 – 1 A AC  
5: 0 – 5 A AC

**[2] SETPOINT 1 OUTPUT**

- 1: Hi (coil energized at alarm)  
2: Hi (coil de-energized at alarm)  
3: Lo (coil energized at alarm)  
4: Lo (coil de-energized at alarm)

**[3] SETPOINT 2 OUTPUT**

- 1: Hi (coil energized at alarm)  
2: Hi (coil de-energized at alarm)  
3: Lo (coil energized at alarm)  
4: Lo (coil de-energized at alarm)

**[4] POWER INPUT****AC Power**

- B: 100 V AC  
C: 110 V AC  
D: 115 V AC  
F: 120 V AC  
G: 200 V AC  
H: 220 V AC  
J: 240 V AC

**DC Power**

- S: 12 V DC  
R: 24 V DC  
V: 48 V DC  
P: 110 V DC

**[5] OPTIONS**

blank: none

/Q: With options (specify the specification)

**SPECIFICATIONS OF OPTION: Q (multiple selections)****COATING (For the detail, refer to M-System's web site.)**

- /C01: Silicone coating  
/C02: Polyurethane coating  
/C03: Rubber coating

**TERMINAL SCREW MATERIAL**

- /S01: Stainless steel

**GENERAL SPECIFICATIONS**

**Construction:** Plug-in

**Connection:** M3.5 screw terminals

**Screw terminal:** Chromated steel (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Input to output 1 to output 2 to power

**Input waveform:** Up to 15 % of 3rd harmonic content

**Setpoint adjustments:** 10-position rotary switches (front); 0 – 99 % independently; 1 % increments

**Hysteresis (deadband):** 0.7 – 2.5 %

**Front LEDs:** Red LED turns on when the coil is energized.

**Power ON timer:** Relays de-energized for approx. 2 seconds after power is turned on.

## INPUT SPECIFICATIONS

**Frequency:** 50 or 60 Hz

**Input burden:** 0.5 VA maximum

**Overload capacity:** 500 % of rating for 5 sec., 120 % continuous

**Operational range:** 0 - 100 % of rating

**Line voltage effect:**  $\pm 0.1$  % over voltage range

**Insulation resistance:**  $\geq 100$  M $\Omega$  with 500 V DC

**Dielectric strength:** 2000 V AC @1 minute (input to output 1 to output 2 to power to ground)

## OUTPUT SPECIFICATIONS

■ **Relay Contact:** 100 V AC @ 1 A ( $\cos \phi = 1$ )

120 V AC @ 1 A ( $\cos \phi = 1$ )

240 V AC @ 0.5 A ( $\cos \phi = 1$ )

30 V DC @ 1 A (resistive load)

**Maximum switching voltage:** 380 V AC or 125 V DC


**Maximum switching power:** 120 VA or 30 W

**Minimum load:** 5 V DC @ 10 mA

**Mechanical life:**  $5 \times 10^7$  cycles

For maximum relay life with inductive loads, external protection is recommended.

### Alarm Trip Operation Terminal No. in parentheses

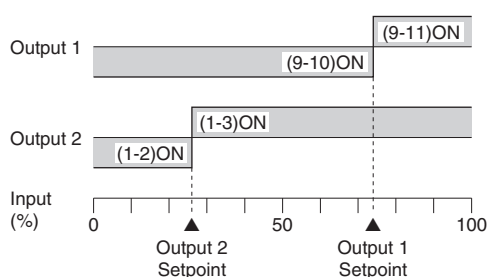

### Trip Operation in Power Failure

- **Output Code: 1 & 4:** Terminals 1 - 2, 9 - 10 turn ON
- **Output Code: 2 & 3:** Terminals 1 - 3, 9 - 11 turn ON

## INSTALLATION

### Power input

- **AC:** Operational voltage range: rating  $\pm 10$  %, 50/60  $\pm 2$  Hz, approx. 2 VA
- **DC:** Operational voltage range: rating  $\pm 10$  %, or 85 - 150 V for 110 V rating (ripple 10 % p-p max.) approx. 2 W (80 mA at 24 V)

**Operating temperature:** -5 to +60°C (23 to 140°F)

**Operating humidity:** 30 to 90 %RH (non-condensing)

**Mounting:** Surface or DIN rail

**Weight:** 370 g (0.82 lb)

## PERFORMANCE in percentage of span


**Setpoint accuracy:**  $\pm 0.9$  %

**Trip point repeatability:**  $\pm 0.05$  %


**Temp. coefficient:**  $\pm 0.02$  %/°C ( $\pm 0.01$  %/°F)

**Response time:** Approx. 0.7 sec. (0 - 100 % at 90 % setpoint)


## EXTERNAL VIEW

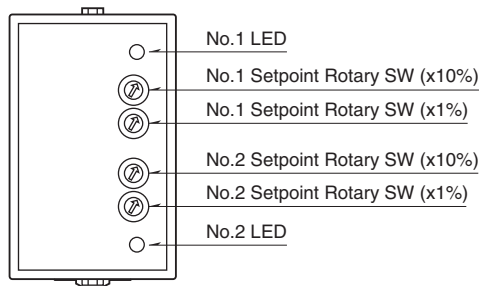


### EXTERNAL DIMENSIONS unit: mm (inch)

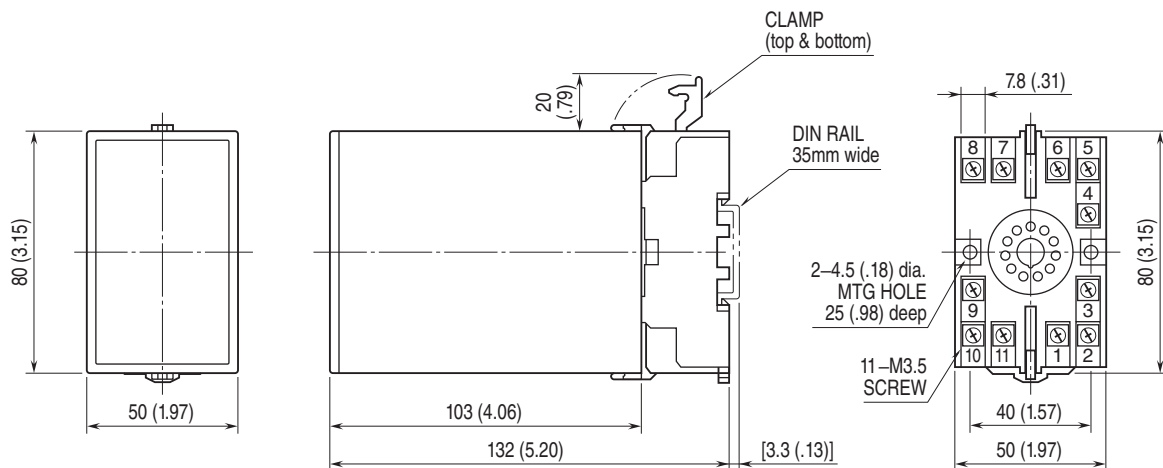

- When mounting, no extra space is needed between units.

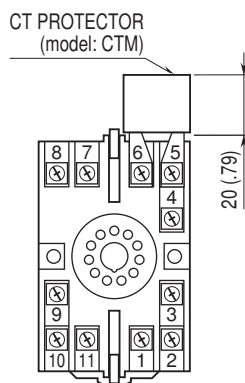**TERMINAL ASSIGNMENTS** unit: mm (inch)


## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

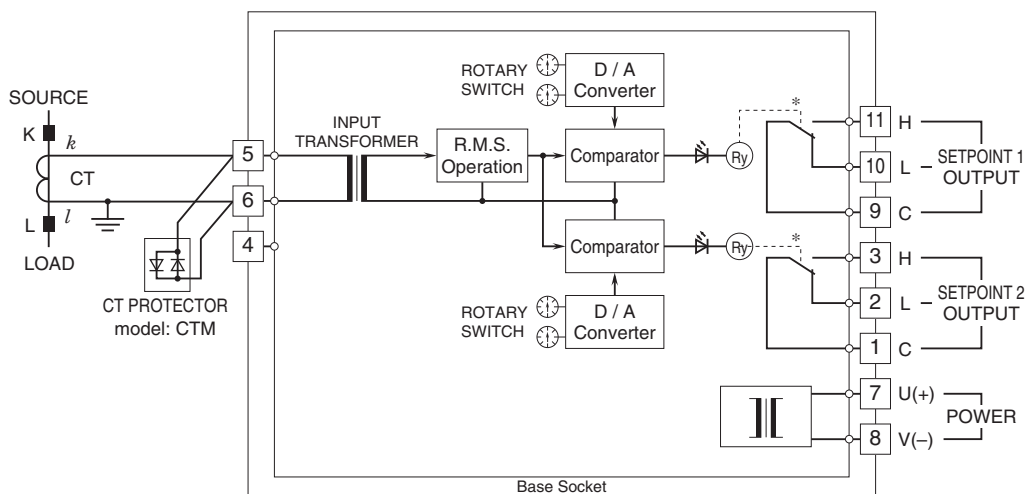


\*Relay status for output codes "1" & "4", at power OFF.

### Relay Protection

#### AC Powered



#### DC Powered



Specifications are subject to change without notice.