

Picture coming soon

FEATURES:

- Efficiency up to 90%
- Ultra-wide 4:1 Input range
- No-load consumption $\leq 0.14\text{W}$
- Operating Temperature: -40°C to $+75^{\circ}\text{C}$
- Input under voltage lockout
- On/Off Remote Control
- Over Voltage Protection
- I/Output Isolation 1500VDC
- Over Current protection
- Continuous Short Circuit protection



Models

Single output

Model	Input Voltage (V)	Max Input current Full/No load (mA)	Output Voltage (V)	Output Current max (A)	Isolation (VDC)	Max Capacitive Load(uF)	Efficiency (%)
AM30EW-2403S-NZ	9-36*	993/80	3.3	6	1500	10000	85
AM30EW-2405S-NZ	9-36*	1453/80	5	6	1500	10000	88
AM30EW-2409S-NZ	9-36*	1420/9	9	3.33	1500	4700	88
AM30EW-2412S-NZ	9-36*	1420/9	12	2.5	1500	2700	90
AM30EW-2415S-NZ	9-36*	1420/9	15	2	1500	1680	90
AM30EW-2424S-NZ	9-36*	1420/9	24	1.25	1500	680	90
AM30EW-4803S-NZ	18-75	485/23	3.3	6	1500	10000	87
AM30EW-4805S-NZ	18-75	726/25	5	6	1500	10000	88
AM30EW-4812S-NZ	18-75	718/8	12	2.5	1500	2700	89
AM30EW-4815S-NZ	18-75	718/8	15	2	1500	1680	89
AM30EW-4824S-NZ	18-75	718/8	24	1.25	1500	680	89

*At Input range 9-18VDC output power will be rated at 80%.

Add suffix “-K” for optional heat sink.

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C , humidity $<75\%$, nominal input voltage and at rated output load unless otherwise specified.

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	24 48	9-36 18-75		VDC
Filter	$\pi(\text{Pi})$ Network			
Startup time		10		ms
Absolute Maximum Rating (1sec max)	24 48		-0.7-50 -0.7-100	VDC
On/Off control	ON – open or 3.5-12VDC ; OFF – short to $-V_{in}$ or 0-1.2VDC, Idle current: 5 - 8mA			
Input under voltage lockout	24 48		5.5-6.5 14-15.5	VDC
Input reflected current		40		mA

Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Tested I/O voltage	60 sec, 1mA	1500		VDC
Resistance	500VDC Isolation	>1000		MOhm
Capacitance	I/O 100KHz/0.1V	2000		pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±1	±3	%
Over voltage protection	Zener Diode Clamp	110	160	%
Over current protection		110	190	% of Io
Short Circuit protection	Continuous, hiccup			
Short circuit restart	Auto-Recovery			
Line voltage regulation	Full load, LL-HL	±0.2	±0.5	% of Vin
Load voltage regulation	0% to 100% load	±0.5	±1	%
Temperature coefficient			±0.03	%/°C
Ripple & Noise	20MHz Bandwidth, 5% to 100% load		100	mV p-p
Voltage adjustment range			±10	%
Transient recovery time	25% load step change		500	µS
Transient recovery deviation	25% load step change: 3.3, 5, ±5Vout 25% load step change: others	±5 ±3	±8 ±5	%

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	300		KHz
Operating temperature	See derating curve	-40 to +75		°C
Storage temperature		-55 to +105		°C
Maximum case temperature			100	°C
Cooling	Free air convection			
Humidity			95	% RH
Case material		Aluminum Alloy		
Weight		26 without heat sink/ 34 with heat sink		g
Dimensions (L x W x H)	Without heatsink With heatsink	2 x 1 x 0.47 inches 2 x 1 x 0.64 inches	50.8 x 25.4 x 11.8 mm 50.8 x 25.4 x 16.3 mm	
MTBF	>1,000,000 hours (MIL-HDBK -217F, Ground Benign, t=+25°C)			
Maximum soldering temperature	1.5mm from case for 10 sec		300	°C

Environment Specification

Test	Parameters	Conditions
Vibration	Test mode	10-55Hz
	Acceleration	10g, 30min, every axis tested



Safety Specifications

Parameters	
Standards	IEC/EN/UL 60950-1 pending
	Meet EN 55022, Class B, with external filter & EN 55024: 2010
	IEC 61000-4-2, Contact ±4KV, Criteria B
	IEC 61000-4-3, 10V/m, Criteria A
	IEC 61000-4-4, ±2KV, Criteria B, with external filter
	IEC 61000-4-5, ±2KV, Criteria B, with external filter
	IEC 61000-4-6, 3Vrms, Criteria A
	IEC 61000-4-29, 0-70%, Criteria B

Pin Out Specifications

Pin	Single
1	+Vin
2	-Vin
3	On/Off Control
4	+Vout
5	-Vout
6	Trim

Dimensions

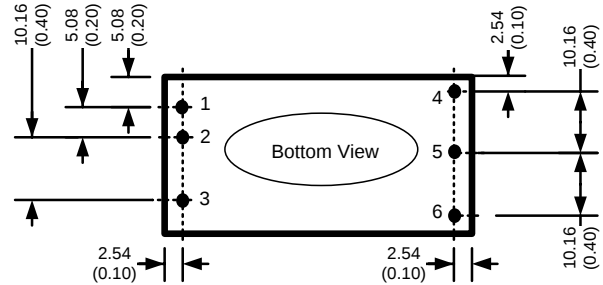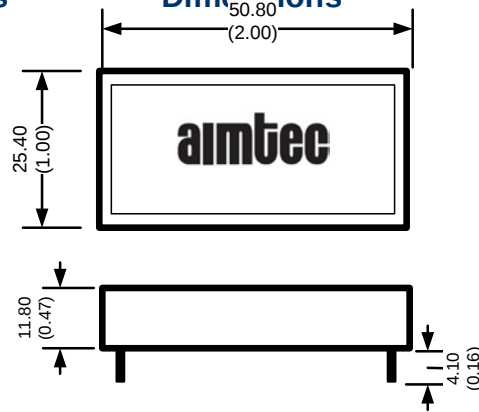


Notes:
All dimensions are typical in millimeters (inches).
Pin Pitch Tolerance ± 0.10 (± 0.004)
Case Tolerance ± 0.50 (± 0.02)


Trimming

Output voltage can be externally trimmed by utilizing the methods as shown below

Fixed Resistor

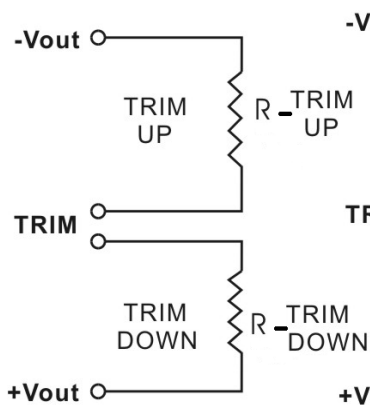

Variable Potentiometer

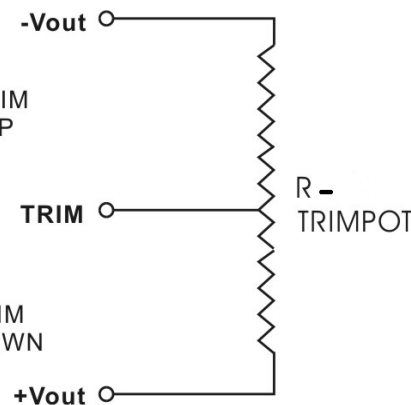

Leave open if not used.

AM30EW-xx03S-NZ

Trim down %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	3.27	3.23	3.2	3.17	3.14	3.1	3.07	3.04	3	2.97
Rt down (KΩ)	124.138	73.217	53.983	41.497	32.737	24.449	19.839	16.148	12.236	9.856
Trim up %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	3.33	3.37	3.4	3.43	3.47	3.5	3.53	3.56	3.6	3.63
Rt up (KΩ)	-556.59	194.738	89.364	55.050	34.131	25.350	19.357	15.006	10.773	8.367

AM20EW-xx05S-NZ

Trim down %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	4.95	4.9	4.85	4.8	4.75	4.7	4.65	4.6	4.55	4.5
Rt down (KΩ)	105.180	52.153	31.996	21.377	14.822	10.372	7.154	4.719	2.811	1.276
Trim up %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	5.05	5.1	5.15	5.2	5.25	5.3	5.35	5.4	5.45	5.5
Rt up (KΩ)	176.356	71.279	41.973	28.200	20.197	14.967	11.281	8.543	6.430	4.749

AM20EW-xx09S-NZ

Trim down %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	8.91	8.82	8.73	8.64	8.55	8.46	8.37	8.28	8.19	8.1
Rt down (KΩ)	375.532	207.429	139.156	102.145	78.924	62.996	51.392	42.562	35.616	30.011
Trim up %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	9.09	9.18	9.27	9.36	9.45	9.54	9.63	9.72	9.81	9.9
Rt up (KΩ)	314.531	112.638	64.147	42.357	29.974	21.989	16.412	12.296	9.134	6.628

AM20EW-xx12S-NZ

Trim down %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	11.88	11.76	11.64	11.52	11.4	11.28	11.16	11.04	10.92	10.8
Rt down (KΩ)	496.091	301.451	212.527	161.585	128.573	105.441	88.332	75.163	64.715	56.223
Trim up %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	12.12	12.24	12.36	12.48	12.6	12.72	12.84	12.96	13.08	13.2
Rt up (KΩ)	706.435	158.920	83.878	54.074	38.076	28.095	21.274	16.316	12.551	9.594


AM20EW-xx15S-NZ

Trim down %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	14.85	14.7	14.55	14.4	14.25	14.1	13.95	13.8	13.65	13.5
Rt down (KΩ)	634.883	400.637	288.513	222.758	179.536	148.959	126.187	108.568	94.532	83.086
Trim up %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	15.15	15.3	15.45	15.6	15.75	15.9	16.05	16.2	16.35	16.5
Rt up (KΩ)	1460.098	192.573	96.641	61.354	43.016	31.781	24.191	18.720	14.590	11.361

AM20EW-xx24S-NZ, xx=24 or 48


Trim down %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	23.76	23.52	23.28	23.04	22.8	22.56	22.32	22.08	21.84	21.6
Rt down (KΩ)	1038.047	638.015	455.256	350.553	282.702	235.158	199.992	172.928	151.453	134
Trim up %	1	2	3	4	5	6	7	8	9	10
Vout (VDC)	24.24	24.48	24.72	24.96	25.2	25.44	25.68	25.92	26.16	26.4
Rt up (KΩ)	816.889	179.913	94.338	60.463	42.306	30.987	23.256	17.640	13.375	10.027

Derating

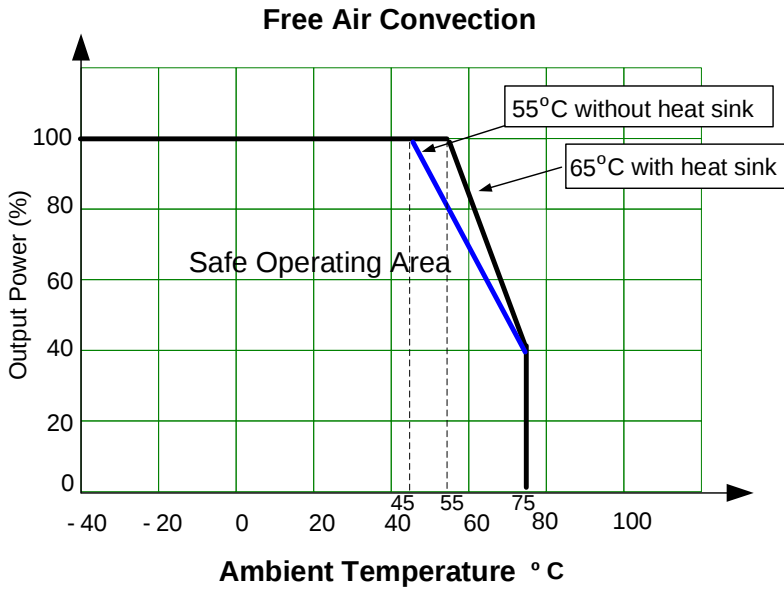

NOTE: With operations at 12V nominal input (9-18VDC) the output power will be rated at 80% only.

EMC recommended filter

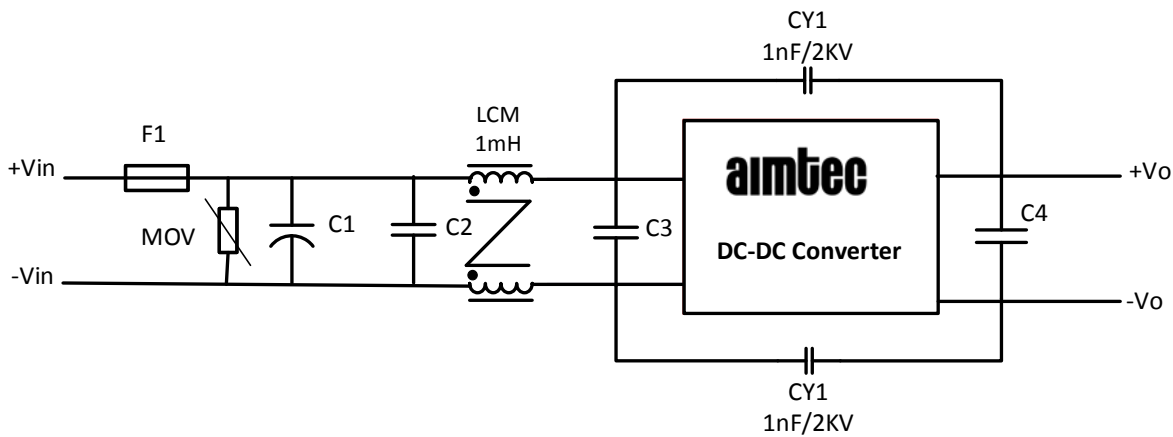

Model	MOV	C1	C2 & C3	C4
24 Vin	S14K35	330 μ F / 50V	4.7 μ F / 50V	220 μ F for 3.3, 5 & 9 V output
48 Vin	S14K60	330 μ F / 100V	2.2 μ F / 100V	100 μ F for 12, 15 & 24 V output

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.