aimtec
Your Power Partner

Series AM9G-Z

9 Watt | DC-DC Converter

Picture coming soon

FEATURES:

- SIP8 Metal Case Package
- High Efficiency up to 90%
- On / Off Control
- Input Under Voltage Lockout
- Operating Temperature -40°C to +85°C
- Continuous Short Circuit Protection
- Input / Output Isolation 1600VDC
- Over Voltage and Over Current Protection

RoHS

Models
Single Output

Model	Input Voltage (V)	Output Voltage (V)	Output Current Max (mA)	Isolation (VDC)	Input Current Full | No Load (mA)		Capacitor Load (µF)	Efficiency (%)
AM9G-1203SZ	9-18	3.3	2000	1600	679	15	2600	81
AM9G-1205SZ	9-18	5	1600	1600	784	15	1300	85
AM9G-1209SZ	9-18	9	1000	1600	862	15	800	87
AM9G-1212SZ	9-18	12	750	1600	852	15	560	88
AM9G-1215SZ	9-18	15	600	1600	843	15	470	89
AM9G-1224SZ	9-18	24	375	1600	843	15	200	89
AM9G-2403SZ	18-36	3.3	2000	1600	344	15	2600	80
AM9G-2405SZ	18-36	5	1600	1600	392	15	1300	85
AM9G-2409SZ	18-36	9	1000	1600	426	15	800	88
AM9G-2412SZ	18-36	12	750	1600	421	15	560	89
AM9G-2415SZ	18-36	15	600	1600	417	15	470	90
AM9G-2424SZ	18-36	24	375	1600	417	15	200	90
AM9G-4803SZ	36-75	3.3	2000	1600	168	10	2600	82
AM9G-4805SZ	36-75	5	1600	1600	196	10	1300	85
AM9G-4809SZ	36-75	9	1000	1600	213	10	800	88
AM9G-4812SZ	36-75	12	750	1600	211	10	560	89
AM9G-4815SZ	36-75	15	600	1600	211	10	470	89
AM9G-4824SZ	36-75	24	375	1600	211	10	200	89

Models
Dual output

Model	Input Voltage (V)	Output Voltage (V)	Output Current Max (mA)	Isolation (VDC)	Input Current Full | No Load (mA)		Capacitor Load (µF)	Efficiency (%)
AM9G-1205DZ	9-18	±5	±800	1600	784	15	±800	85
AM9G-1212DZ	9-18	±12	±375	1600	852	15	±390	88
AM9G-1215DZ	9-18	±15	±300	1600	843	15	±200	89
AM9G-2405DZ	18-36	±5	±800	1600	388	15	±800	86
AM9G-2412DZ	18-36	±12	±375	1600	421	15	±390	89
AM9G-2415DZ	18-36	±15	±300	1600	431	15	±200	87
AM9G-4805DZ	36-75	±5	±800	1600	194	10	±800	86
AM9G-4812DZ	36-75	±12	±375	1600	216	10	±390	87
AM9G-4815DZ	36-75	±15	±300	1600	216	10	±200	87

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified

Input Specifications

Parameters	Nominal	Typical	Maximum	Units
Voltage range	12 24 48	9-18 18-36 36-75		VDC
Filter	Capacitor			
Transient recovery time	100% - 25% load, 25% load step change	250		µs
Transient Response deviation	100% - 25% load, 25% load step change 100% - 25% load, 25% load step change, 3.3 & 5 V output		±3 ±5	%
Startup time		50		ms

Absolute Maximum Rating	12 Vin 24 Vin 48 Vin		25 50 100	VDC
Input Reflected Ripple Current			30	mA p-p
On / Off Control	ON – high impedance or open; OFF – 2-4mA input current through 1KΩ (standby 2.5mA max)			
Under Voltage lockout	12 24 48	8.9 / 7 16 / 13 33 / 30		VDC

Isolation Specifications

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	60 sec		1600	VDC
Case / Input or Output	60 sec		1000	VDC
Resistance		> 1000		MOhm
Capacitance			50	pF

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy			±1	%
Cross Regulation (Dual)	1st output 25% to 100%, 2nd output 100%		±5	%
Short Circuit protection	Continuous			
Short Circuit restart	Auto recovery			
Line voltage regulation	LL~HL		±0.2	%
Load voltage regulation (Single)	0-100% load, 3.3 Vin 0-100% load, others		±1 ±0.5	%
Load voltage regulation (Dual)	0-100% balanced load		±1	%
Over Voltage protection		130		%
Over Current protection		150		%
Temperature coefficient		±0.02		%/ºC
Ripple & Noise*	At 20MHz Bandwidth		75	mV p-p

***Measured with 1µF CC and 10µF EC.**

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load, 12 & 24Vin models 100% load, 48Vin models	400 500		KHz
Operating temperature	Refer Derating Curve	-40 to +85		ºC
Storage temperature	-55 to +125			ºC
Max Case temperature			+100	ºC
Cooling	Free air convection (30 – 65 LFM)			
Humidity			5 - 95	%
Case material	Copper			
Potting material	Epoxy (UL94V-0 rated)			
Pin Material	C5191R-H Solder coated			
Weight		7.3		g
Dimensions (L x W x H)	0.86 x 0.38 x 0.44 inch 21.85 x 9.60 x 11.20 mm			
MTBF	>900,000 hrs (MIL-HDBK -217F, Ground Benign, t=+25ºC)			
Maximum soldering temperature	1.5mm from case for 10 sec max		260	ºC

Safety Specifications


Parameters	
Standards	EN55032 Class A, EN55024 (external class A circuit required)
	IEC61000-4-2, Perf. Criteria B
	IEC61000-4-3, Perf. Criteria A
	IEC61000-4-4, Perf. Criteria A (external EFT/Surge circuit required)
	IEC61000-4-5, Perf. Criteria A (external EFT/Surge circuit required)
	IEC61000-4-6, Perf. Criteria A

	IEC61000-4-8, Perf. Criteria A
	NOTE: designed to meet IEC 60950-1:2001

Pin Out Specifications


Pin	1600 VDC	
	Single	Dual
1	- V Input	- V Input
2	+ V Input	+ V Input
3	On/Off Control	On/Off Control
6	+ V Output	+ V Output
7	- V Output	Common
8	N.C.	- V Output

Dimensions

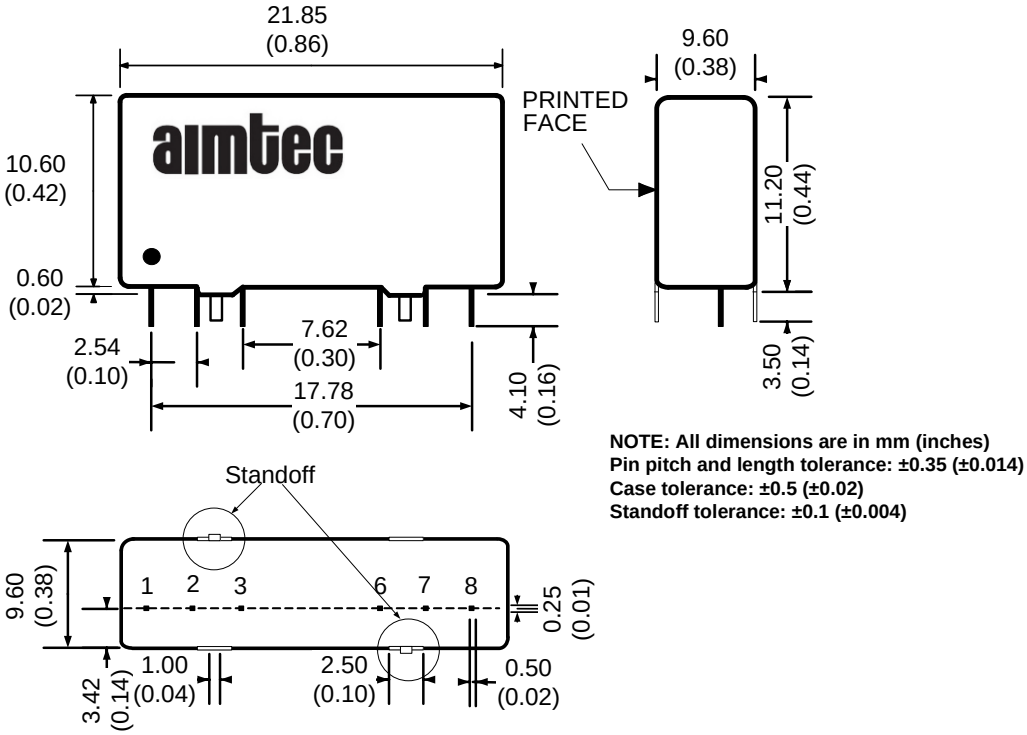


NOTE: All dimensions are in mm (inches)
Pin pitch and length tolerance: ±0.35 (±0.014)
Case tolerance: ±0.5 (±0.02)
Standoff tolerance: ±0.1 (±0.004)

Input Reflected Ripple Test Circuit

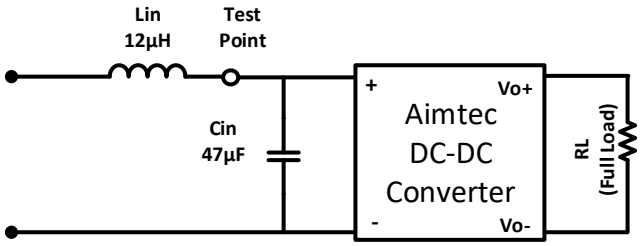


* Tested at full load, and nominal input

Derating

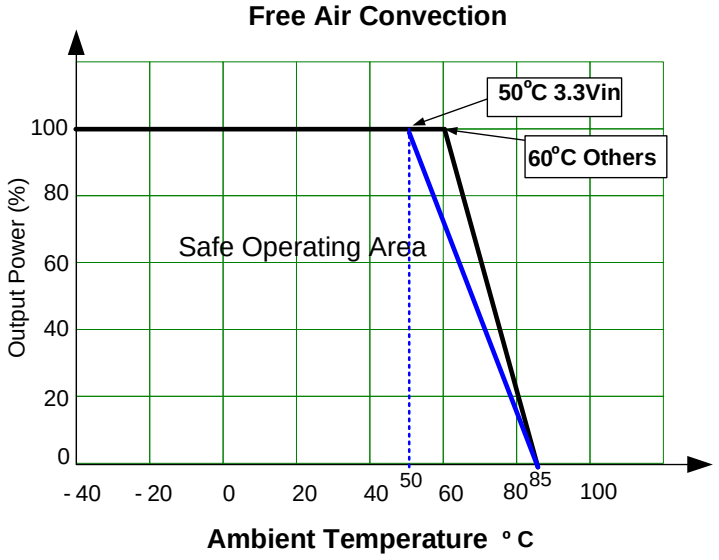


Control ON/OFF pin connection example:

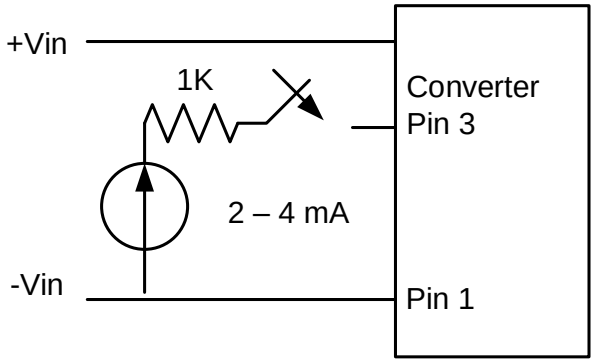

NOTE: The voltage could be applied trough a limiting resistor.
The converter is turned on when the external switching circuit is open.


EFT/Surge Application circuit

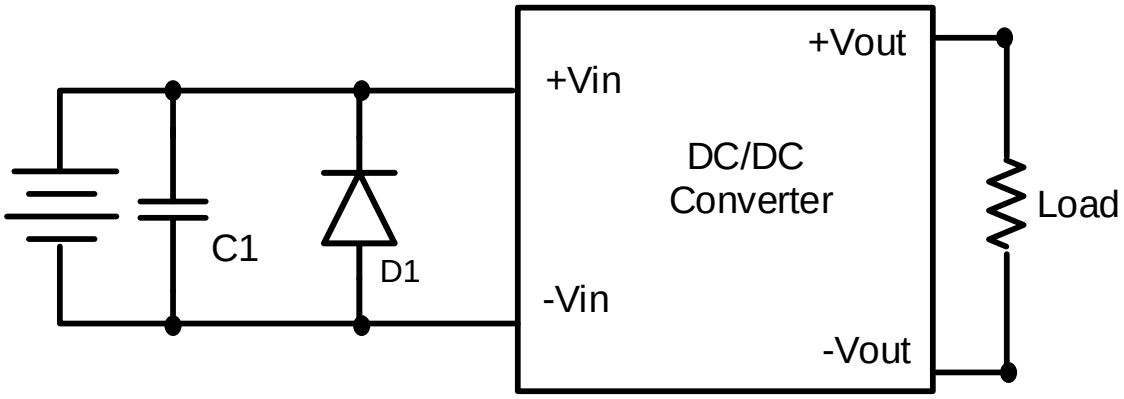

Vin	C1	D1
12VDC	300µF/100V	TVS, 3kW, 26V
24VDC		TVS, 3kW, 75V
48VDC		TVS, 3kW, 120V


Class A EMI, external filter

Single output models

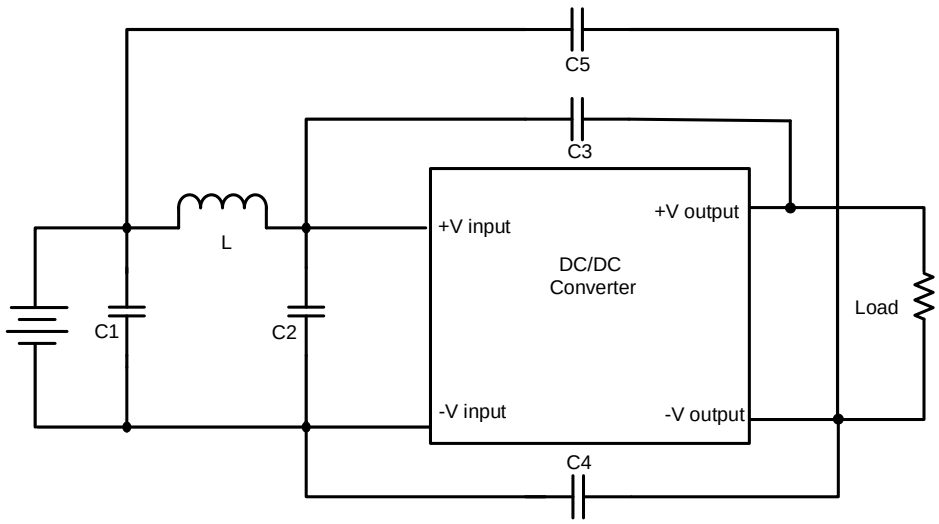

Vin	C1	C2	C3, C4	C5	L
12VDC	10µF/35V	-	1nF/3KV	-	3.3µH
24VDC	4.7µF/100V	4.7µF/100V	1nF/3KV	-	10µH
48VDC				220pF/3KV	

Dual output models

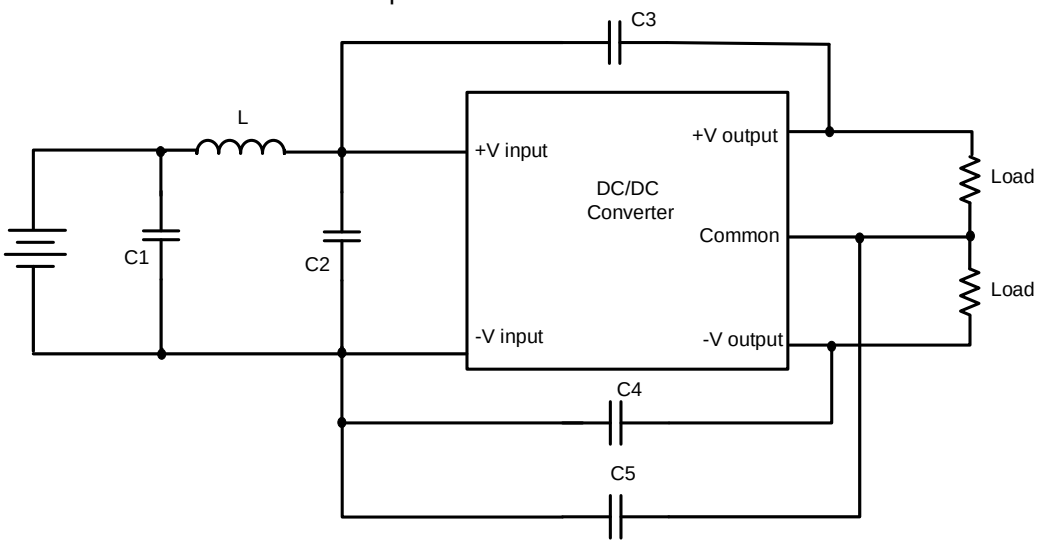

Vin	C1	C2	C3, C4	C5	L
12VDC	10µF/35V	-	1nF/3KV	-	3.3µH
24VDC	4.7µF/100V	4.7µF/100V	1nF/3KV	-	10µH
48VDC				220pF/3KV	

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.