

Description：

This N-Channel MOSFET uses advanced trench technology and design to provide excellent $R_{DS(on)}$ with low gate charge.

It can be used in a wide variety of applications.



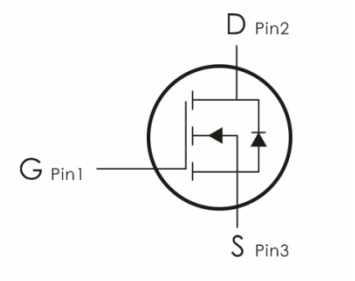

Features：

1) V_{DS}=30V,I_D=100A,$R_{DS(ON)}$<4.2mΩ @V_{GS}=10V
2) Low gate charge.
3) Green device available.
4) Advanced high cell denity trench technology for ultra $R_{DS(ON)}$.
5) Excellent package for good heat dissipation.

Absolute Maximum Ratings： (T_C=25℃ unless otherwise noted)

Symbol	Parameter	Ratings	Units
V_{DS}	Drain-Source Voltage	30	V
V_{GS}	Gate-Source Voltage	±20	V
I_D	Continuous Drain Current-T_C=25℃[1]	100	A
	Continuous Drain Current-T_C=100℃[1]	59	
	Pulsed Drain Current[2]	360	
E_{AS}	Single Pulse Avalanche Energy[3]	250	mJ
P_D	Power Dissipation,T_C=25℃[4]	90	W
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to +175	℃

Thermal Characteristics：

Symbol	Parameter	Max	Units
$R_{\theta JC}$	Thermal Resistance,Junction to Case	2.5	℃/W
$R_{\theta JA}$	Thermal Resistance,Junction to Ambient[3]	62.5	

Download from alldatasheet.com

Electrical Characteristics: (T_C=25℃ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
Off Characteristics						
BV_{DSS}	Drain-Sourtce Breakdown Voltage	V_{GS}=0V,I_D=250μA	30	---	---	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS}=0V, V_{DS}=24V	---	---	1	μA
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V, V_{DS}=0A	---	---	±100	nA
On Characteristics						
$V_{GS(th)}$	GATE-Source Threshold Voltage	V_{GS}=V_{DS}, I_D=250μA	1		3	V
$R_{DS(ON)}$	Drain-Source On Resistance[2]	V_{GS}=10V,I_D=40A	---	3.6	4.2	mΩ
		V_{GS}=4.5V,I_D=30A	---	---	7	
G_{FS}	Forward Transconductance	V_{DS}=10V, I_D=15A	---	28	---	S
Dynamic Characteristics						
C_{iss}	Input Capacitance	V_{DS}=15V, V_{GS}=0V, f=1MHz	---	1950	2350	pF
C_{oss}	Output Capacitance		---	320	---	
C_{rss}	Reverse Transfer Capacitance		---	240	---	
Switching Characteristics						
$t_{d(on)}$	Turn-On Delay Time	V_{DD}=15V, I_D=15A, V_{GS}=10V,R_{GEN}=3.3Ω	---	13	---	ns
t_r	Rise Time		---	36	---	ns
$t_{d(off)}$	Turn-Off Delay Time		---	43	---	ns
t_f	Fall Time		---	16	---	ns
Q_g	Total Gate Charge	V_{GS}=10V, V_{DS}=24V, I_D=20A	---	42	84	nC
Q_{gs}	Gate-Source Charge		---	3.9	---	nC
Q_{gd}	Gate-Drain “Miller” Charge		---	14	---	nC
Drain-Source Diode Characteristics						
V_{SD}	Source-Drain Diode Forward Voltage[2]	V_{GS}=0V,I_S=30A	---	---	1.2	V

Download from alldatasheet.com

trr	Reverse Recovery Time	I_S=10A, V_{GS}=0V, dI/dt=100A	16	---	Ns
qrr	Reverse Recovery Charge		5	---	nc

Notes:

1.Pulse width limited by max. junction temperature

2.Pulse test

3.Surface mounted on 1 in^2 copper pad of FR4 board

Typical Characteristics: (T_C=25℃ unless otherwise noted)

Figure1: Output Characteristics

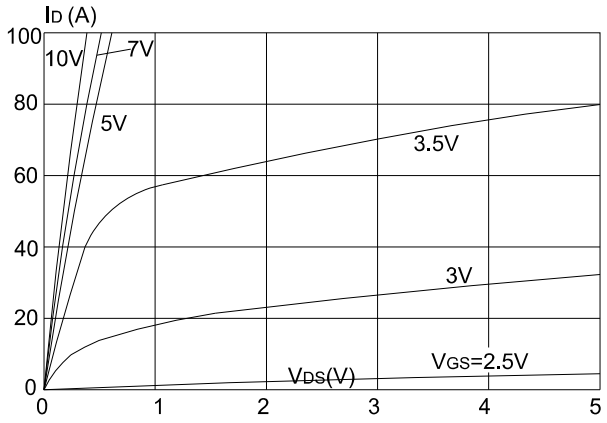


Figure 2: Typical Transfer Characteristics

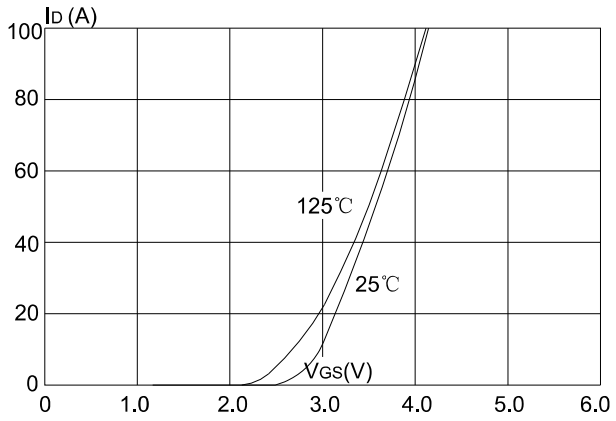


Figure 3: On-resistance vs. Drain Current

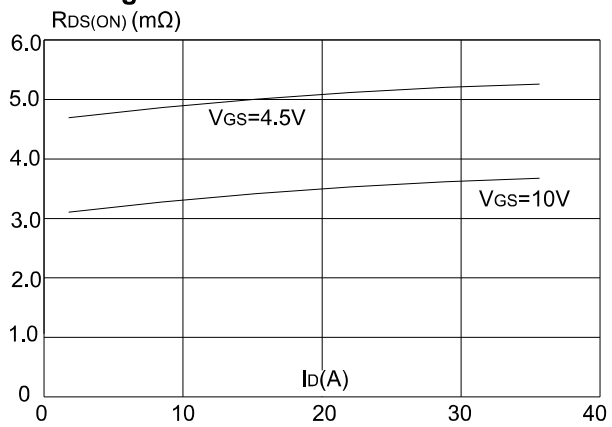


Figure 4: Body Diode Characteristics

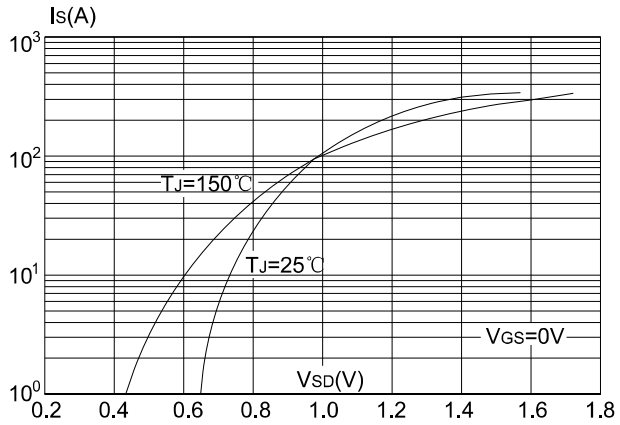


Figure 5: Gate Charge Characteristics


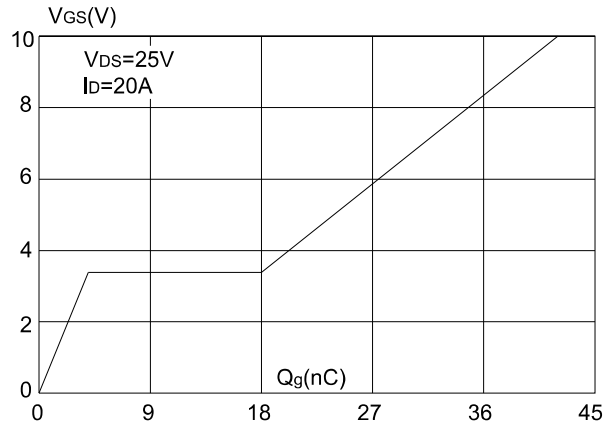


Figure 6: Capacitance Characteristics

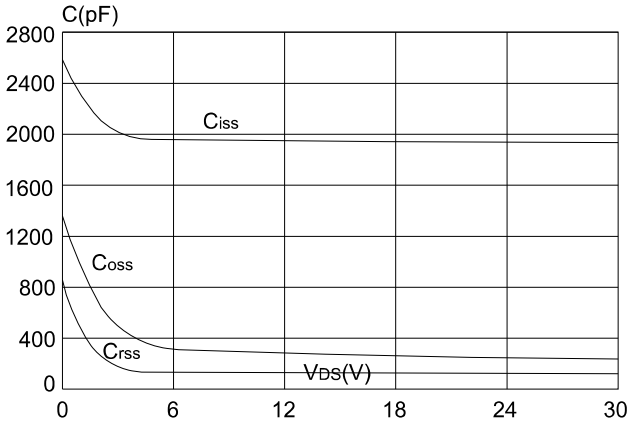

Download from alldatasheet.com

Figure 7: Normalized Breakdown Voltage vs. Junction Temperature

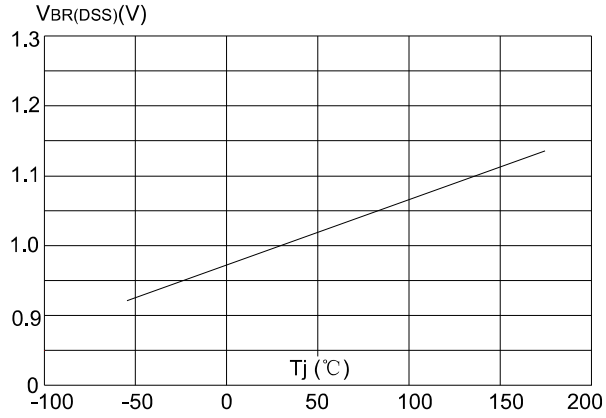


Figure 8: Normalized on Resistance vs. Junction Temperature

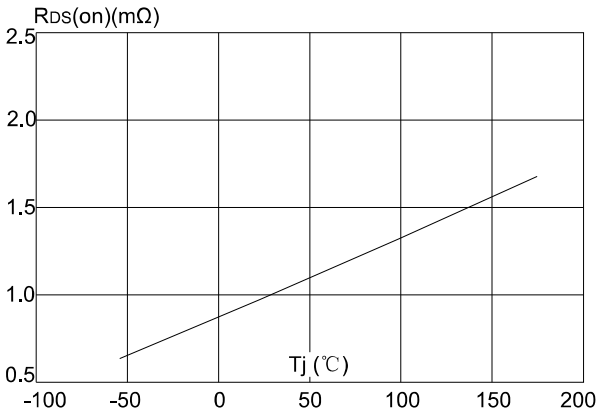


Figure 9: Maximum Safe Operating Area

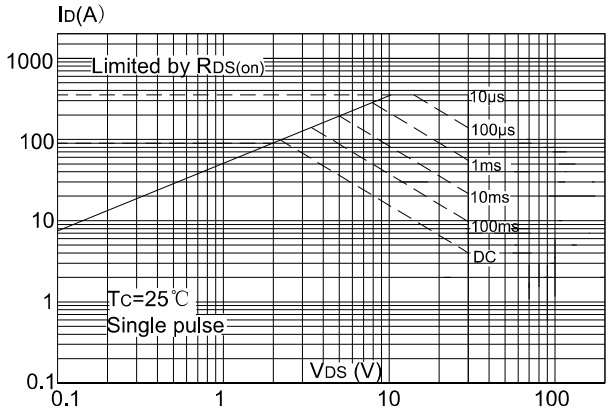


Figure 10: Maximum Continuous Drain Current vs. Case Temperature


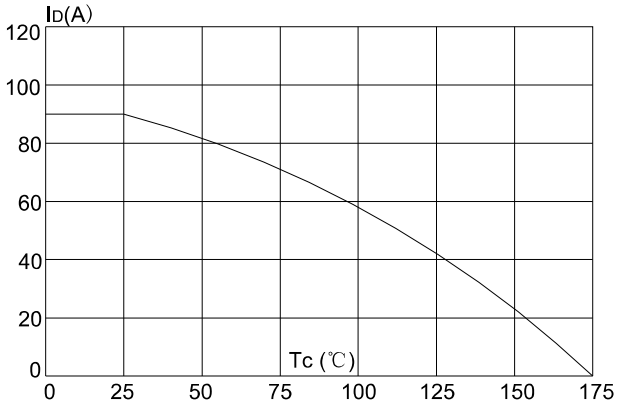


Figure.11: Maximum Effective Transient Thermal Impedance, Junction-to-Case (TO-252)

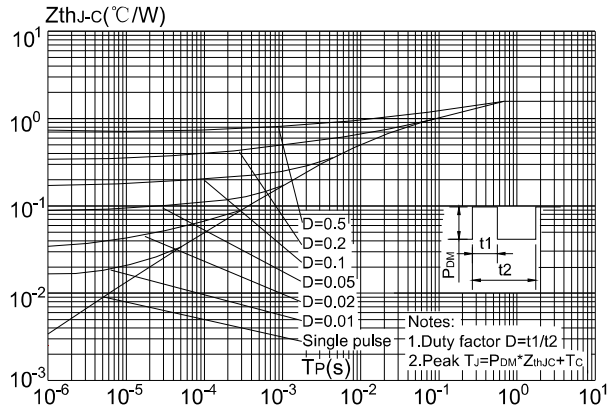

0086-0755-8278-9056
www.doingter.cn

Download from alldatasheet.com