QUAD OP AMP AND VOLTAGE REFERENCE AP4303

General Description

The AP4303 is a monolithic IC that contains quad operational amplifiers and a precision shunt regulator, 1.25Vfor AP4303-C or 1.24V for AP4303-D respectively. It is specifically designed to regulate the output current and voltage levels of switching battery chargers and power supplies.

The four Op Amps feature accurate voltage and current control. Combining a stable voltage reference with the four Op Amps makes AP4303 ideal for use in multifunction charger, power supply voltage monitor, signal processing and control system.

The IC offers the power converter designer a control solution that features increased precision with a corresponding reduction in system complexity and cost.

The AP4303 is available in standard packages of DIP-16 and SOIC-16.

Features

Op Amp

- Input Offset Voltage: 0.5mV
- Supply Current: 250μA per Op Amp at 5.0V Supply Voltage
- Unity Gain Bandwidth: 1MHz
- Output Voltage Swing: 0 to (V_{CC}-1.5)V
- Power Supply Range: 3 to 18V

Voltage Reference

- Reference Voltage Tolerance: 0.5%, 1%
- Sink Current Capability from 0.1 to 80mA
- Output Dynamic Impedance: 0.2Ω
- Externally Adjusted Output Voltage Reference: 1.25V for AP4303-C and 1.24V for AP4303-D

Applications

- Battery Charger
- Switching Power Supply


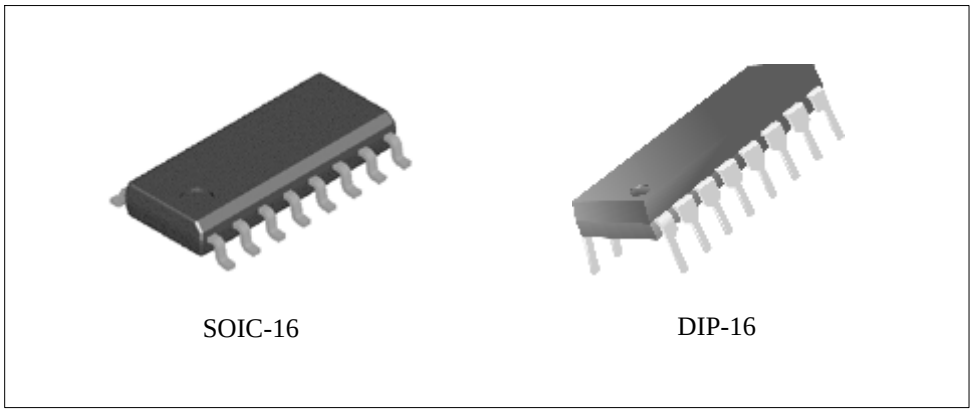


Figure 1. Package Types of AP4303

Pin Configuration

M Package/P Package
(SOIC-16/DIP-16)

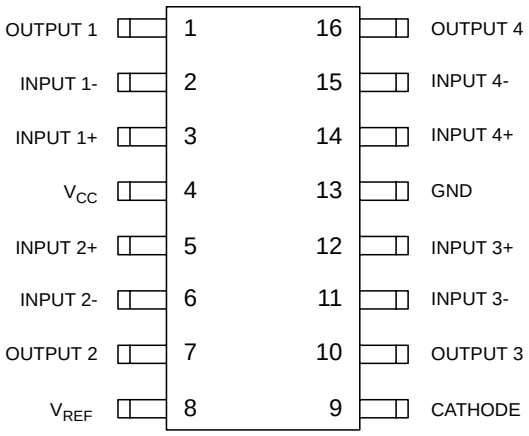

Top View

Figure 2. Pin configuration of AP4303

Functional Block Diagram

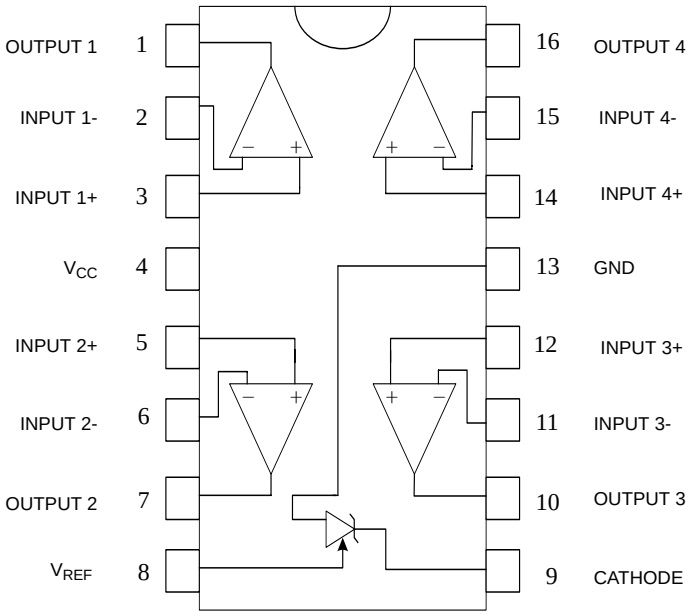


Figure 3. Functional Block Diagram of AP4303

Functional Block Diagram (Continued)

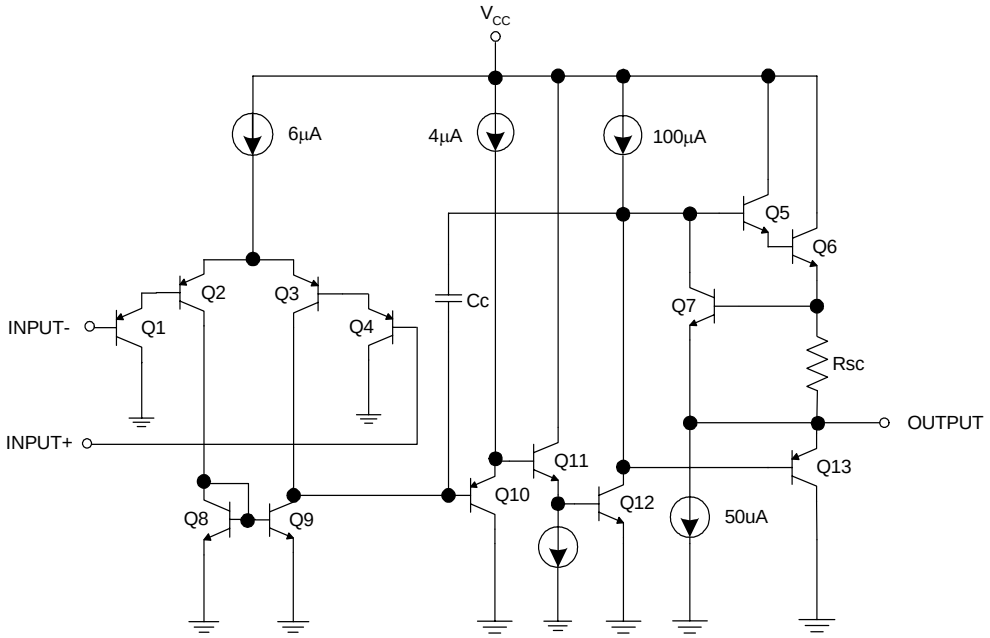


Figure 4. Op Amp Functional Block Diagram
(Each Amplifier)


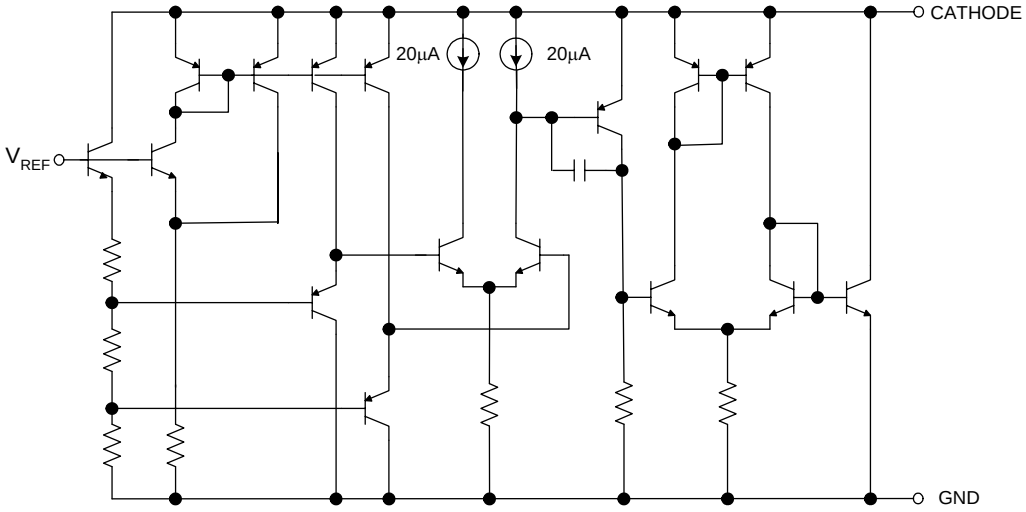


Figure 5. Voltage Reference Functional Block Diagram

Ordering Information

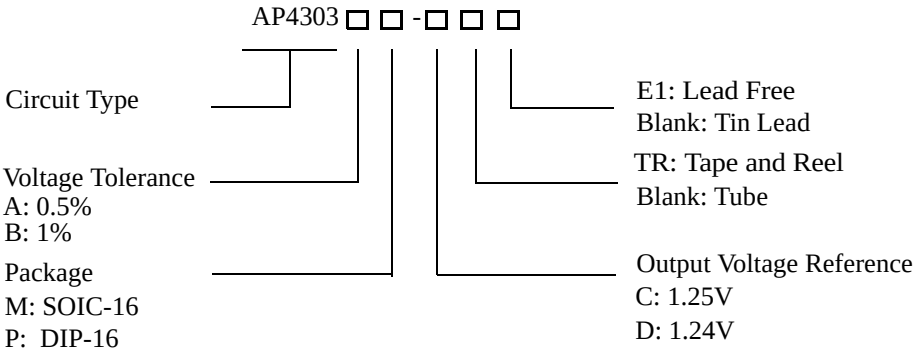

Package	Reference Voltage	Voltage Tolerance	Temperature Range	Part Number		Marking ID		Packing Type
				Tin Lead	Lead Free	Tin Lead	Lead Free	
DIP-16	1.25V	0.5%	-40 to 85°C	AP4303AP-C	AP4303AP-CE1	AP4303AP-C	AP4303AP-CE1	Tube
		1%		AP4303BP-C	AP4303BP-CE1	AP4303BP-C	AP4303BP-CE1	
	1.24V	0.5%		AP4303AP-D	AP4303AP-DE1	AP4303AP-D	AP4303AP-DE1	
		1%		AP4303BP-D	AP4303BP-DE1	AP4303BP-D	AP4303BP-DE1	
SOIC-16	1.25V	0.5%	-40 to 85°C	AP4303AM-C	AP4303AM-CE1	AP4303AM-C	AP4303AM-CE1	Tube
				AP4303AM-CTR	AP4303AM-CTRE1	AP4303AM-C	AP4303AM-CE1	Tape & Reel
		1%		AP4303BM-C	AP4303BM-CE1	AP4303BM-C	AP4303BM-CE1	Tube
				AP4303BM-CTR	AP4303BM-CTRE1	AP4303BM-C	AP4303BM-CE1	Tape & Reel
	1.24V	0.5%		AP4303AM-D	AP4303AM-DE1	AP4303AM-D	AP4303AM-DE1	Tube
				AP4303AM-DTR	AP4303AM-DTRE1	AP4303AM-D	AP4303AM-DE1	Tape & Reel
		1%		AP4303BM-D	AP4303BM-DE1	AP4303BM-D	AP4303BM-DE1	Tube
				AP4303BM-DTR	AP4303BM-DTRE1	AP4303BM-D	AP4303BM-DE1	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "E1" suffix in the part number, are RoHS compliant.

Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Value		Unit
Power Supply Voltage (V_{CC} to GND)	V_{CC}	20		V
Input Voltage Range	V_{IN}	-0.3 to V_{CC}+0.3		V
Op Amp Input Differential Voltage	V_{ID}	20		V
Voltage Reference Cathode Current	I_K	100		mA
Power Dissipation	P_D	DIP-16	1000	mW
		SOIC-16	850	
Operating Junction Temperature	T_J	150		°C
Storage Temperature Range	T_{STG}	-65 to 150		°C
Lead Temperature (Soldering 10s)	T_L	260		°C

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Recommended Operating Conditions

Parameter	Min	Max	Unit
Supply Voltage	3	18	V
Ambient Temperature	-40	105	°C

Electrical Characteristics

Operating Conditions: V_{CC}=+5V, T_A=25°C unless otherwise specified.

Parameter	Conditions		Min	Typ	Max	Unit
Total Supply Current, Excluding Current in Voltage Reference	V_{CC}=5V, no load, -40°C ≤T_A ≤85°C			1.0	1.6	mA
	V_{CC}=18V, no load, -40°C ≤T_A ≤85°C			1.2	2.4	
Voltage Reference Section						
Reference Voltage for AZ4303C	I_{KA}=10mA T_A=25°C	0.5% tolerance	1.244	1.250	1.256	V
		1% tolerance	1.237		1.263	
Reference Voltage for AZ4303D	I_{KA}=10mA T_A=25°C	0.5% tolerance	1.234	1.240	1.246	V
		1% tolerance	1.227		1.252	
Reference Voltage Deviation over Full Temperature Range	I_{KA}=10mA, T_A=-40 to 85°C			5	17	mV
Minimum Cathode Current for Regulation				0.1	0.2	mA
Ratio of Change in V_{REF} to that of Cathode Voltage	I_{KA}=10mA	V_{REF} to 10V		1.0	2.7	mV/V
		10V to 18V		0.5	2.0	
Reference Current	I_{KA}=10mA, R1=10kΩ, R2=∞			0.7	4	μA
The Deviation of Reference Current over Temperature	V_{KA}=V_{REF}, I_{KA}=10mA, T_A=-40°C to 85°C			0.4	1.2	μA
Off-State Cathode Current	V_{REF}=0V, V_{KA}=18V			0.05	1.0	μA
Dynamic Impedance	I_{KA} =1.0 to 80mA, f<1kHz			0.2	0.5	Ω

Electrical Characteristics (Continued)

Operating Conditions: V_{CC}=+5V, T_A=25°C unless otherwise specified.

Parameter		Conditions	Min	Typ	Max	Unit
Op Amp Section (Each Op Amp) (V_{CC}=5V, V_O=1.4V, T_A=25°C, unless otherwise noted)						
Input Offset Voltage		T_A=25°C		0.5	3	mV
		T_A=-40 to 85°C			5	
Input Offset Voltage Temperature Drift		T_A=-40 to 85°C		7		μV/ °C
Input Offset Current		T_A=25°C		2	30	nA
Input Bias Current		T_A=25°C		20	150	nA
Input Voltage Range		V_{CC}=0 to 18V	0		V_{CC}-1.5	V
Common Mode Rejection Ratio		T_A=25°C, V_{CM}=0 to 3.5V	70	85		dB
Large Signal Voltage Gain		V_{CC}=15V, R_L=2kΩ, V_O=1.4 to 11.4V	85	100		dB
Power Supply Rejection Ratio		V_{CC}=5 to 18V	70	90		dB
Output Current	Source	V_{CC}=15V, V_{ID}=1V, V_O=2V	20	40		mA
	Sink	V_{CC}=15V, V_{ID}=-1V, V_O=2V	10	20		mA
Output Voltage Swing (High)		V_{CC}=18V, R_L=10kΩ, V_{ID}=1V	16	16.5		V
Output Voltage Swing (Low)		V_{CC}=18V, R_L=10kΩ, V_{ID}=-1V		17	100	mV
Slew Rate		V_{CC}=18V, R_L=2kΩ, A_V=1, V_{IN}=0.5 to 2V, C_L=100pF	0.3	0.5		V/μ s
Gain Bandwidth Product		V_{CC}=18V, R_L=2kΩ, C_L=100pF, V_{IN}=10mV, f=100kHz	0.7	1		MHz

Typical Performance Characteristics

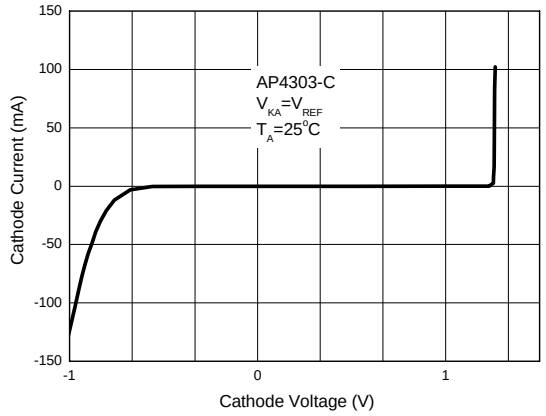


Figure 6. Cathode Current vs. Cathode Voltage

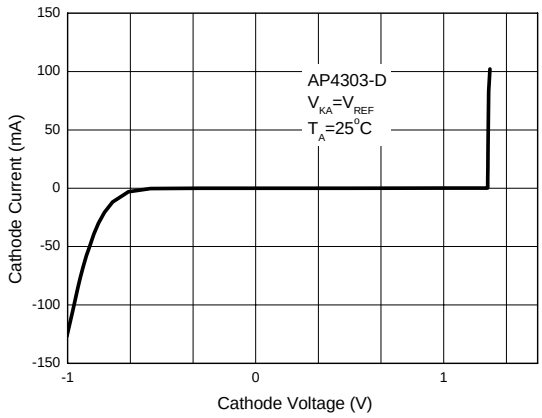


Figure 7.Cathode Current vs. Cathode Voltage

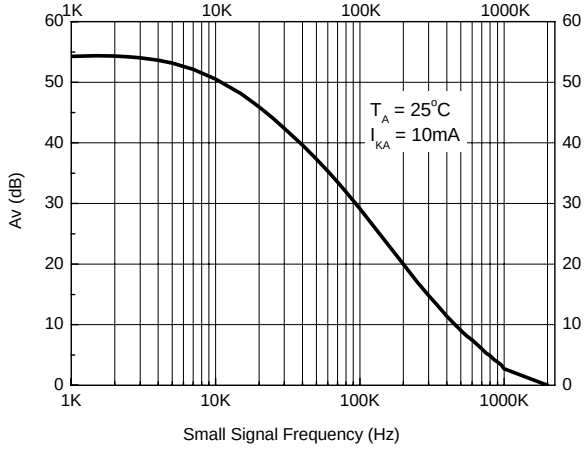


Figure 8. Voltage Reference Small Signal Voltage Gain vs. Frequency

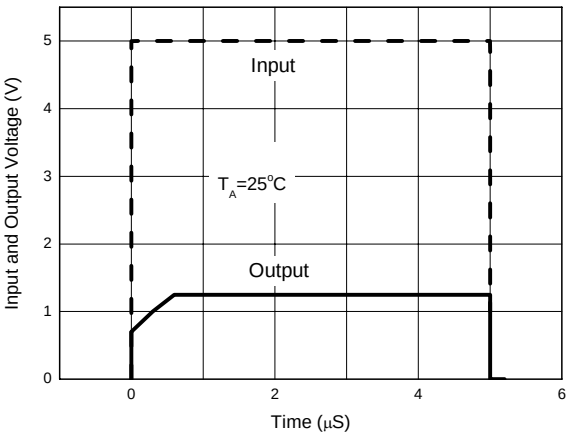


Figure 9. Pulse Response of V_{REF} with respect to V_{KA}

Typical Performance Characteristics (Continued)

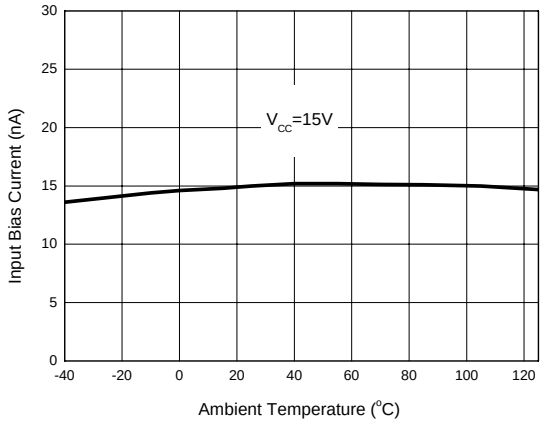


Figure10. Op Amp Input Current

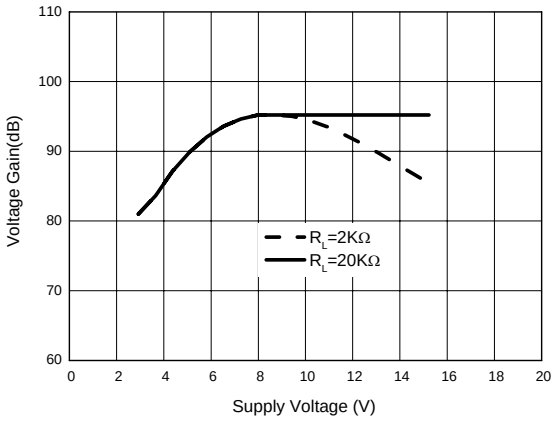


Figure 11. Op Amp Voltage Gain


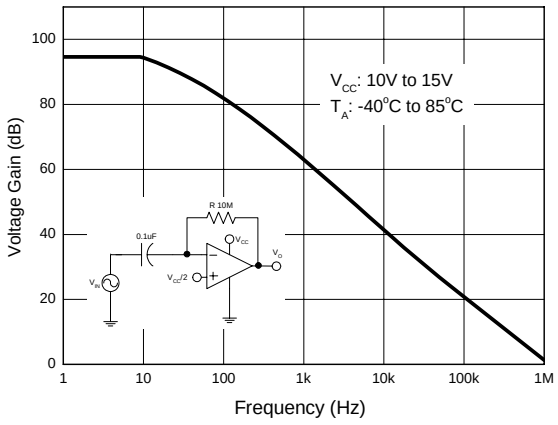


Figure 12. Open Loop Frequency Response


Mechanical Dimensions

DIP-16 **Unit: mm(inch)**

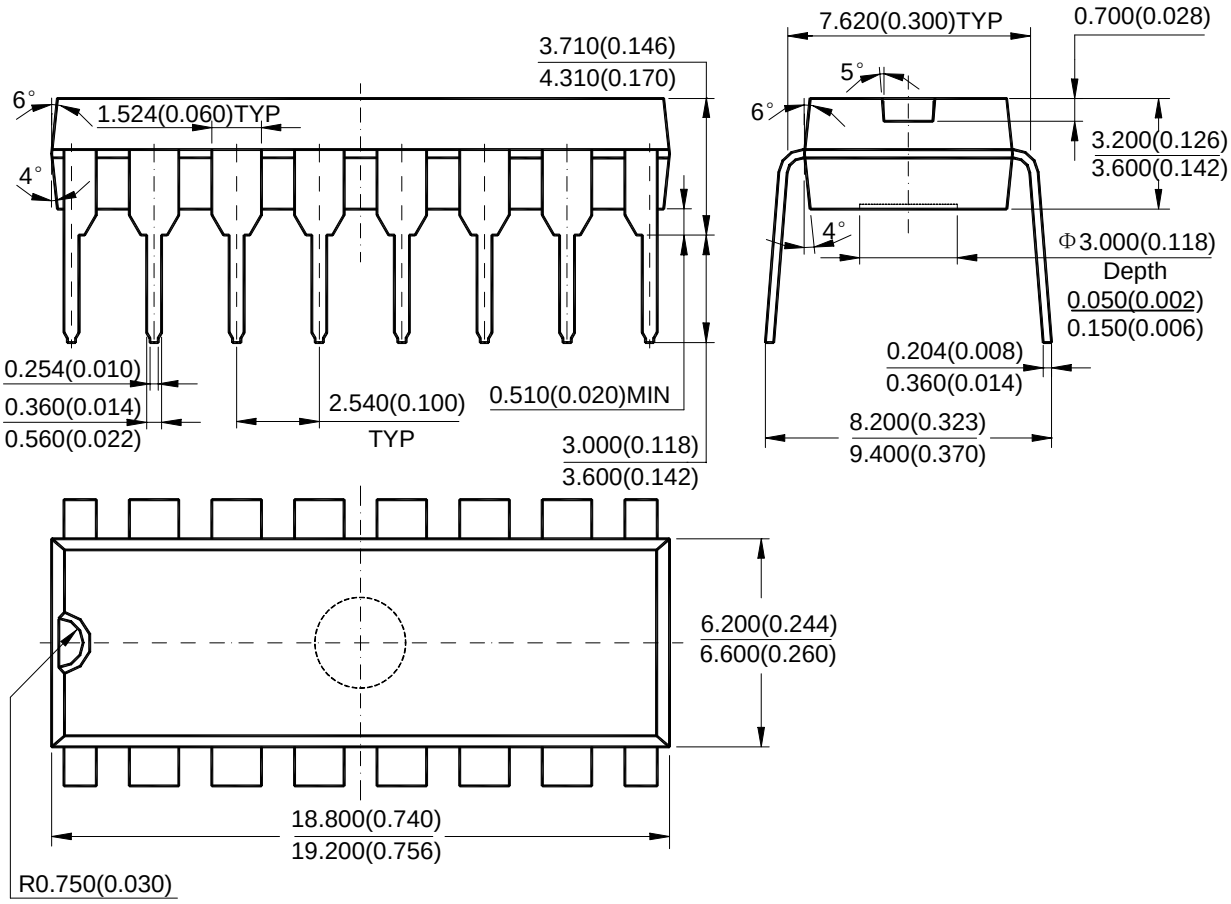

Mechanical Dimensions (Continued)

SOIC-16 **Unit: mm(inch)**

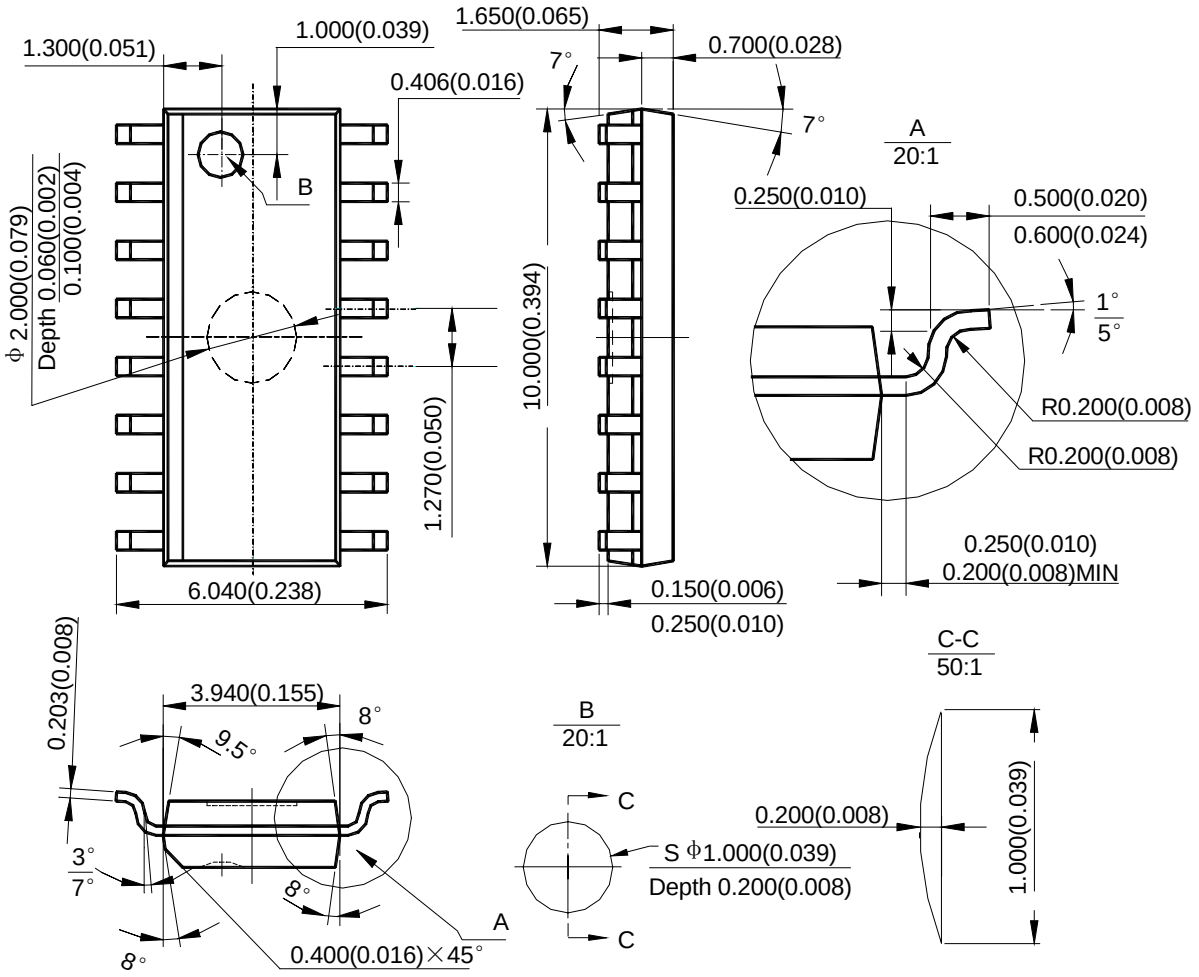



BCD Semiconductor Manufacturing Limited

http://www.bcdsemi.com

IMPORTANT NOTICE

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

MAIN SITE

BCD Semiconductor Manufacturing Limited
- Wafer Fab
Shanghai SIM-BCD Semiconductor Manufacturing Limited
800, Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

BCD Semiconductor Manufacturing Limited
- IC Design Group
Advanced Analog Circuits (Shanghai) Corporation
8F, Zone B, 900, Yi Shan Road, Shanghai 200233, China
Tel: +86-21-6495 9539, Fax: +86-21-6485 9673

REGIONAL SALES OFFICE

Shenzhen Office
Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd. Shenzhen Office
Advanced Analog Circuits (Shanghai) Corporation Shenzhen Office
27B, Tower C, 2070, Middle Shen Nan Road, Shenzhen 518031, China
Tel: +86-755-8368 3987, Fax: +86-755-8368 3166

Taiwan Office
BCD Semiconductor (Taiwan) Company Limited
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan
Tel: +886-2-2656 2808, Fax: +886-2-2656 2806

USA Office
BCD Semiconductor Corporation
3170 De La Cruz Blvd., Suite 105, Santa Clara, CA 95054-2411, U.S.A
Tel: +1-408-988 6388, Fax: +1-408-988 6386