APM2324A


N-Channel Enhancement Mode MOSFET

Feature

- 20V/3A, $R_{DS(ON)}$ = 80mΩ(MAX) @V_{GS} = 4.5V.
  $R_{DS(ON)}$ = 90mΩ(MAX) @V_{GS} = 2.5V.
- Super High dense cell design for extremely low $R_{DS(ON)}$.
- Reliable and Rugged.
- SC-59 for Surface Mount Package.



SC-59



Applications

- Power Management
- Portable Equipment and Battery Powered Systems.

Absolute Maximum Ratings T_A=25℃ Unless Otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	±8	V
Drain Current-Continuous	I_D	3.0	A

Electrical Characteristics T_A=25℃ Unless Otherwise noted

Parameter	Symbol	Test Conditions	Min	Typ.	Max	Units
Off Characteristics						
Drain to Source Breakdown Voltage	BVDSS	VGS=0V, ID=250μA	20	-	-	V
Zero-Gate Voltage Drain Current	IDSS	VDS=12V, VGS=0V	-	-	1	μA
Gate Body Leakage Current, Forward	IGSSF	VGS=8V, VDS=0V	-	-	100	nA
Gate Body Leakage Current, Reverse	IGSSR	VGS=-8V, VDS=0V	-	-	-100	nA
On Characteristics						
Gate Threshold Voltage	VGS(th)	VGS= VDS, ID=250μA	0.4	-	1.3	V
Static Drain-source On-Resistance	RDS(ON)	VGS =4.5V, ID =3.6A	-	70	80	mΩ
		VGS =2.5V, ID =3.1A	-	75	90	mΩ
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Voltage	VSD	VGS =0V, IS=0.94A			1.2	V

Download from alldatasheet.com

Typical Characteristics

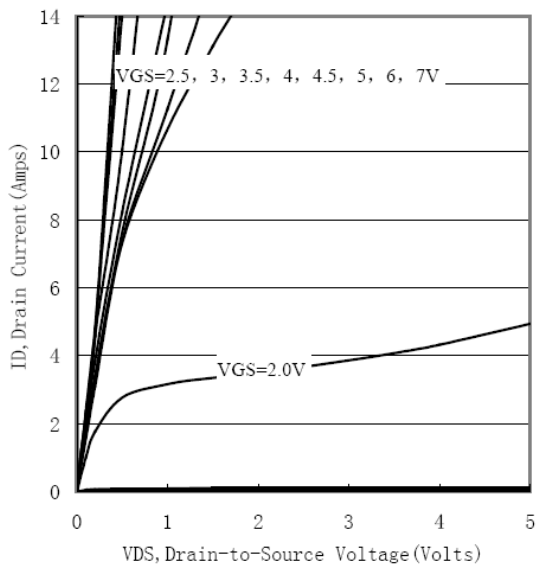


Figure 1. Output Characteristics

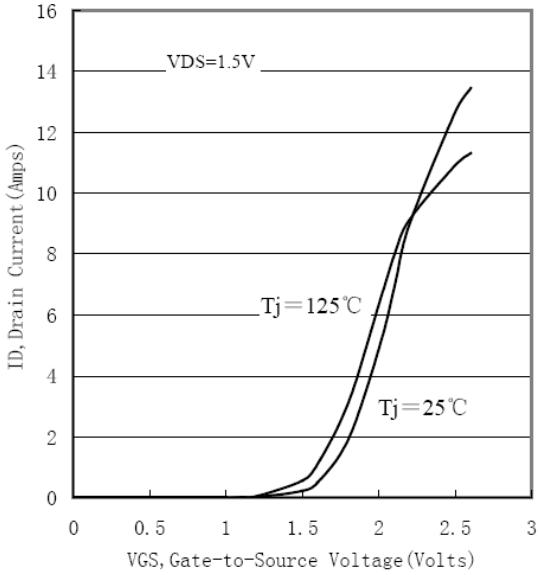


Figure 2. Transfer Characteristics

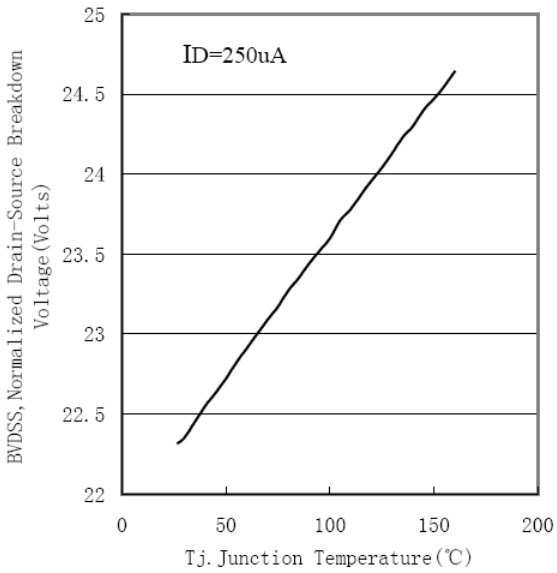


Figure 3. Breakdown Voltage Variation with Temperature

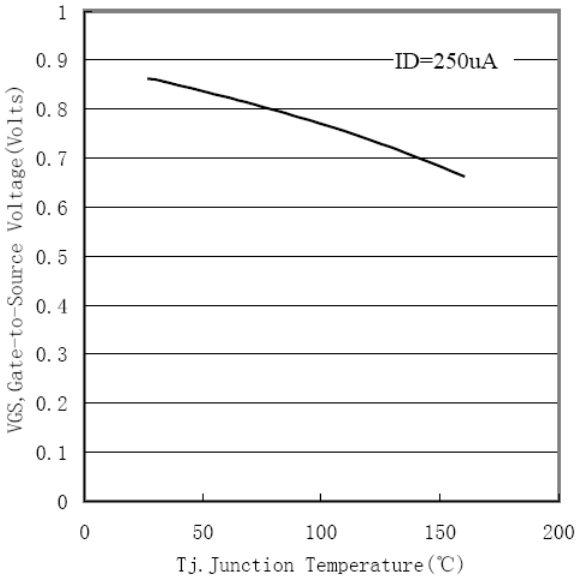


Figure 4. Gate Threshold Variation with Temperature

Download from alldatasheet.com

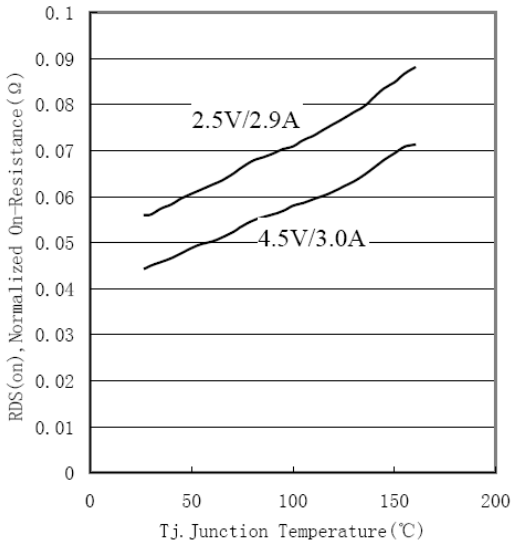


Figure 5. On-Resistance Variation with Temperature

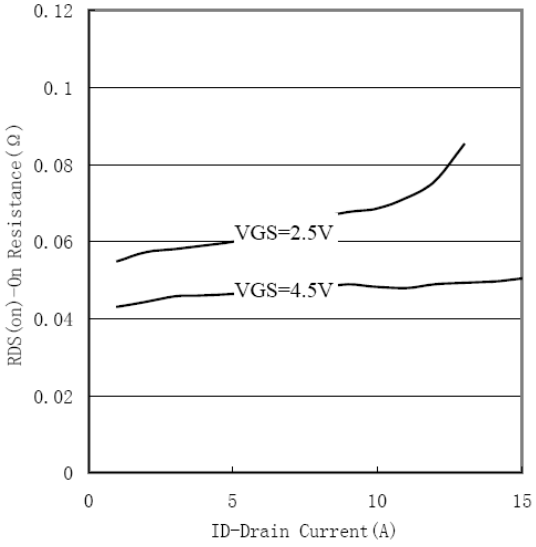


Figure 6. On-Resistance vs. Drain Current

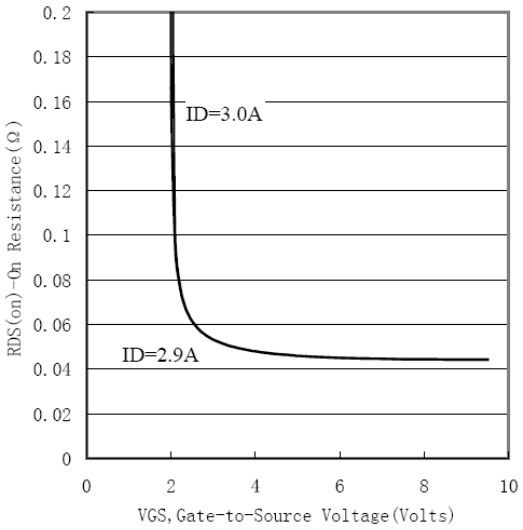


Figure 7. On-Resistance vs. Gate-to-Source Voltage

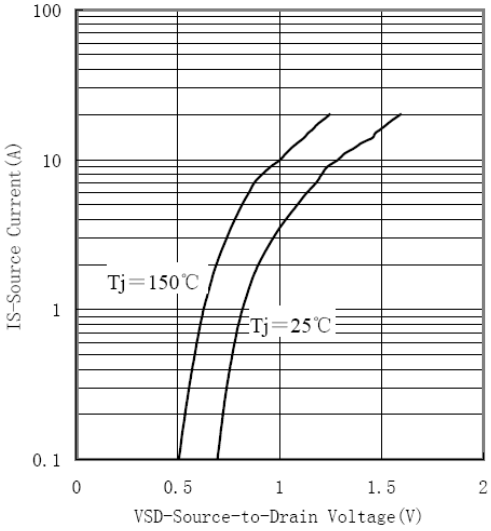


Figure 8. Source-Drain Diode Forward Voltage

Download from alldatasheet.com