Kingbright

2.0x1.25 mm INFRARED EMITTING DIODE

Part Number: APT2012SF4C-PRV


Features


- 2.0mmx1.25mm SMT LED,0.75mm thickness.
- Mechanically and spectrally matched to the phototransistor.
- Package: 2000pcs / reel.
- Moisture sensitivity level : level 3.
- RoHS compliant.

Description

SF4 Made with Gallium Aluminum Arsenide Infrared Emitting diodes.

Package Dimensions

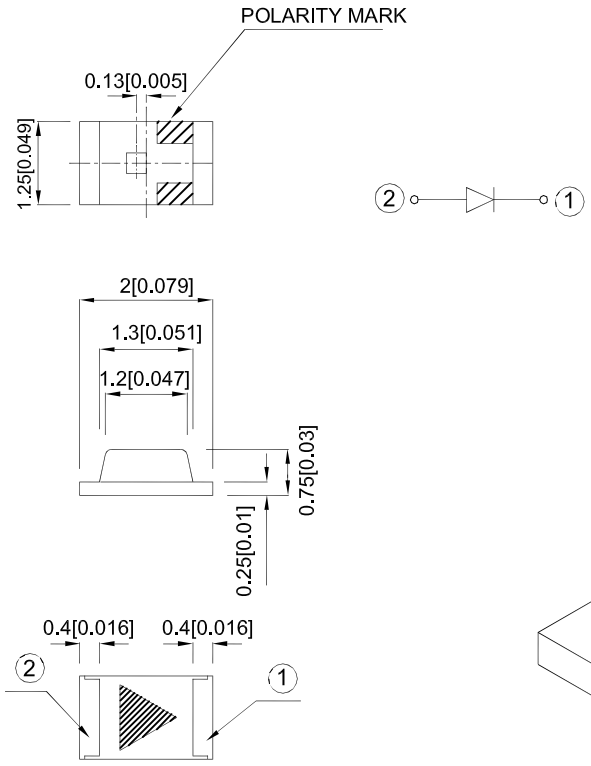



Notes:
1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.1(0.004") unless otherwise noted.
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The device has a single mounting surface. The device must be mounted according to the specifications.

Selection Guide

Part No.	Dice	Lens Type	Po (mW/sr) [2] @ 20mA		Viewing Angle [1]
			Min.	Typ.	2θ1/2
APT2012SF4C-PRV	SF4 (GaAlAs)	Water Clear	0.8	1.5	120°

Notes:
1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Radiant Intensity/ luminous flux: +/-15%.
3. Radiant intensity value is traceable to the CIE127-2007 compliant national standards.

Electrical / Optical Characteristics at TA=25°C


Parameter	P/N	Symbol	Typ.	Max.	Units	Test Conditions
Forward Voltage [1]	SF4	V_F	1.3	1.6	V	I_F=20mA
Reverse Current	SF4	I_R		10	uA	V_R = 5V
Capacitance	SF4	C	90		pF	V_F=0V;f=1MHz
Peak Spectral Wavelength	SF4	λP	880		nm	I_F=20mA
Spectral Bandwidth	SF4	Δλ1/2	50		nm	I_F=20mA

Notes:
1. Forward Voltage: +/-0.1V.
2. Wavelength value is traceable to the CIE127-2007 compliant national standards.
3. Excess driving current and/or operating temperature higher than recommended conditions may result in severe light degradation or premature failure.

Absolute Maximum Ratings at TA=25°C


Parameter	Symbol	SF4	Units
Power dissipation	P_D	80	mW
DC Forward Current	I_F	50	mA
Peak Forward Current [1]	i_{FS}	1.2	A
Reverse Voltage	V_R	5	V
Operating Temperature	T_A	-40 To +85	°C
Storage Temperature	T_{STG}	-40 To +85	°C

Note:
1. 1/100 Duty Cycle, 10μs Pulse Width.

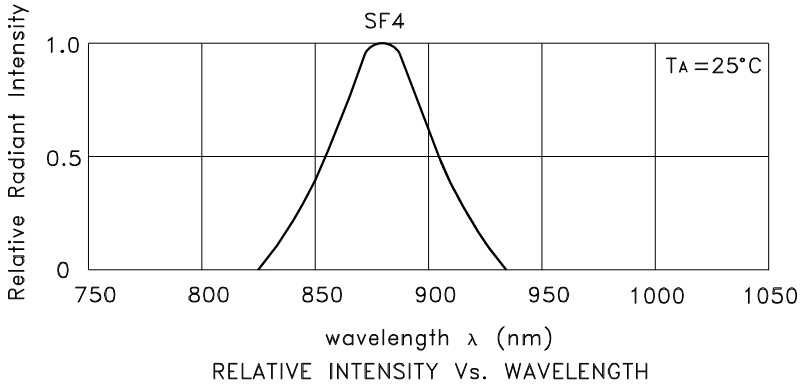


RELATIVE INTENSITY Vs. WAVELENGTH


APT2012SF4C-PRV




FORWARD CURRENT Vs.
FORWARD VOLTAGE



RADIANT INTENSITY Vs.
FORWARD CURRENT



RADIANT INTENSITY Vs.
AMBIENT TEMPERATURE




SPATIAL DISTRIBUTION

APT2012SF4C-PRV


Reflow soldering is recommended and the soldering profile is shown below.
Other soldering methods are not recommended as they might cause damage to the product.

Reflow Soldering Profile For Lead-free SMT Process.

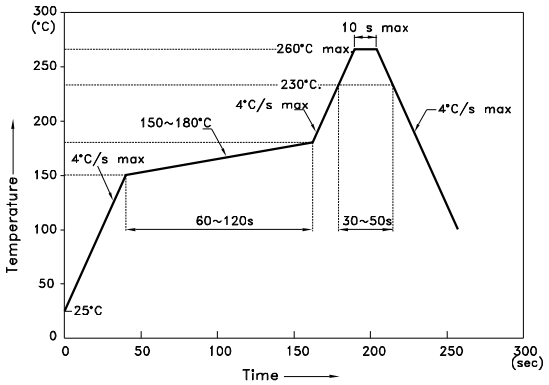


NOTES:
1. We recommend the reflow temperature 245°C(+/-5°C).The maximum soldering temperature should be limited to 260°C.
2. Don't cause stress to the epoxy resin while it is exposed to high temperature.
3. Number of reflow process shall be 2 times or less.


Recommended Soldering Pattern (Units : mm; Tolerance: ± 0.1)

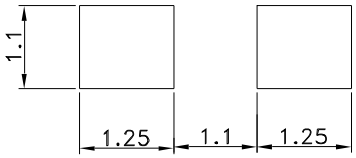

Reel Dimension

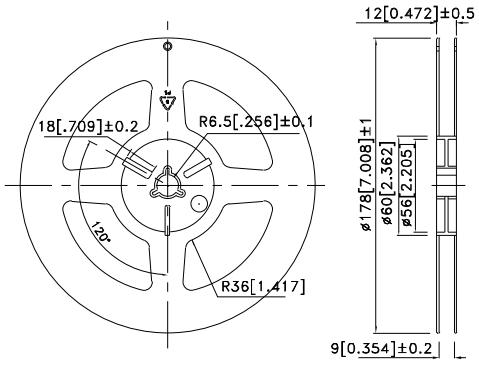



Tape Specifications (Units : mm)

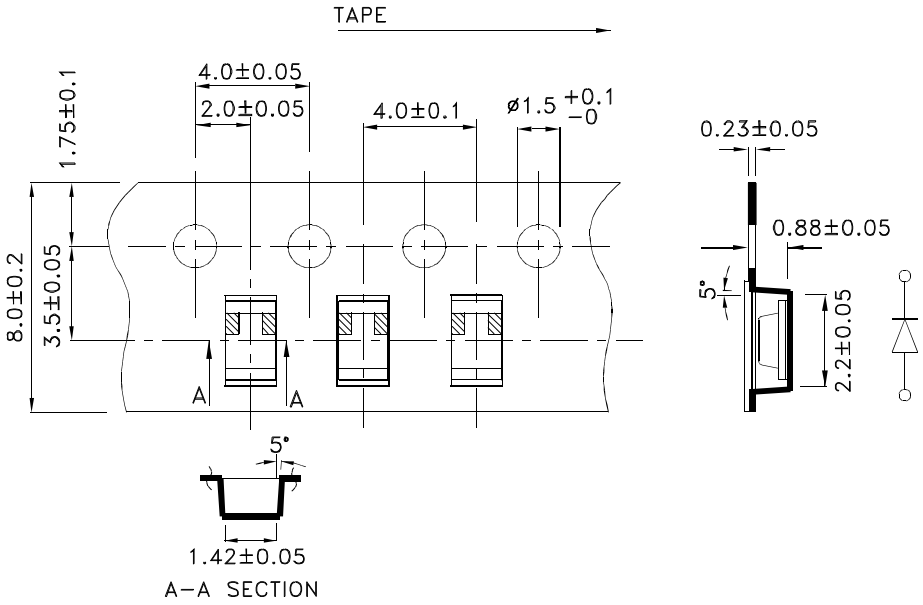

Kingbright

PACKING & LABEL SPECIFICATIONS **APT2012SF4C-PRV**

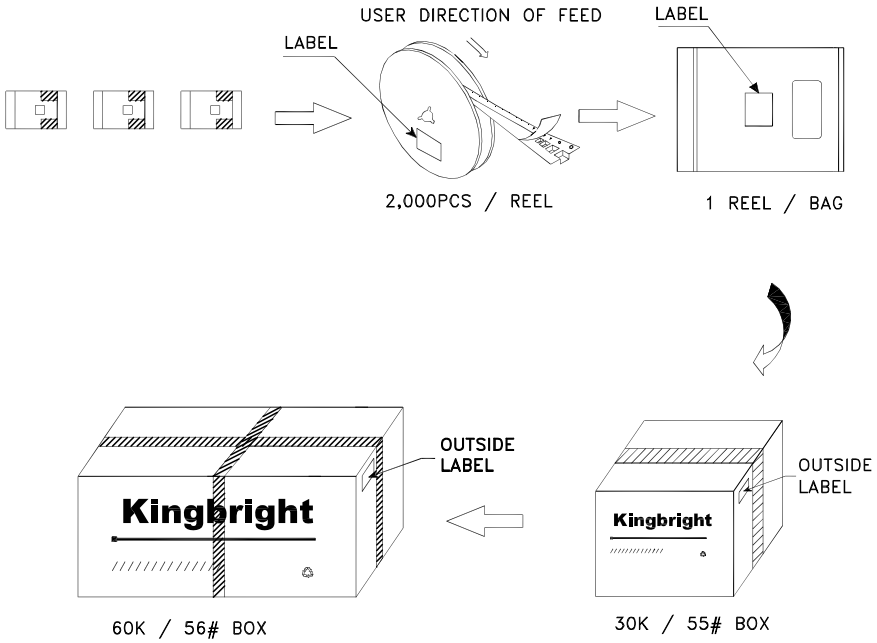

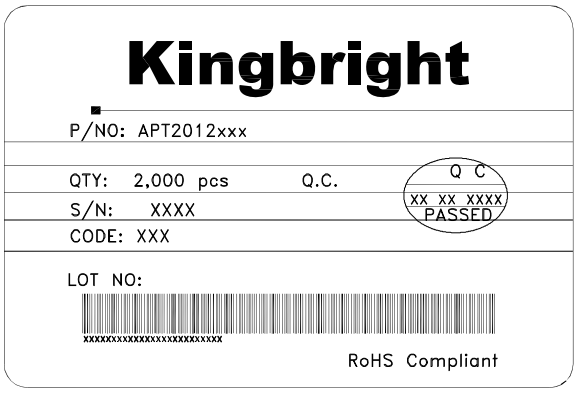

Terms and conditions for the usage of this document

1. The information included in this document reflects representative usage scenarios and is intended for technical reference only.
2. The part number, type, and specifications mentioned in this document are subject to future change and improvement without notice. Before production usage customer should refer to the latest datasheet for the updated specifications.
3. When using the products referenced in this document, please make sure the product is being operated within the environmental and electrical limits specified in the datasheet. If customer usage exceeds the specified limits, Kingbright will not be responsible for any subsequent issues.
4. The information in this document applies to typical usage in consumer electronics applications. If customer's application has special reliability requirements or have life-threatening liabilities, such as automotive or medical usage, please consult with Kingbright representative for further assistance.
5. The contents and information of this document may not be reproduced or re-transmitted without permission by Kingbright.
6. All design applications should refer to Kingbright application notes available at http://www.KingbrightUSA.com/ApplicationNotes